

OS Awareness Manual

ChibiOS/RT

MANUAL

[TRACE32 Online Help](#)

[TRACE32 Directory](#)

[TRACE32 Index](#)

[TRACE32 Documents](#)



[OS Awareness Manuals](#)



[OS Awareness Manual ChibiOS/RT](#)

1

[Overview](#)

3

 Terminology

3

 Brief Overview of Documents for New Users

4

 Supported Versions

4

[Configuration](#)

5

 Quick Configuration Guide

6

 Hooks & Internals in ChibiOS

6

[Features](#)

7

 Display of Kernel Resources

7

 Task Stack Coverage

7

 Task-Related Breakpoints

8

 Task Context Display

9

 Dynamic Task Performance Measurement

10

 Task Runtime Statistics

11

 Function Runtime Statistics

12

 ChibiOS specific Menu

14

[ChibiOS Commands](#)

15

 TASK.CONDvar

 Display condition variables

15

 TASK.EVenT

 Display events

15

 TASK.Heap

 Display heaps

16

 TASK.MailBox

 Display mailboxes

16

 TASK.MuTeX

 Display mutexes

17

 TASK.Pool

 Display memory pools

17

 TASK.Queue

 Display queues

18

 TASK.SEMaphore

 Display semaphores

18

 TASK.Thread

 Display threads

19

 TASK.VTimer

 Display virtual timers

19

[ChibiOS PRACTICE Functions](#)


20

 TASK.CONFIG()

 OS Awareness configuration information

20

Overview

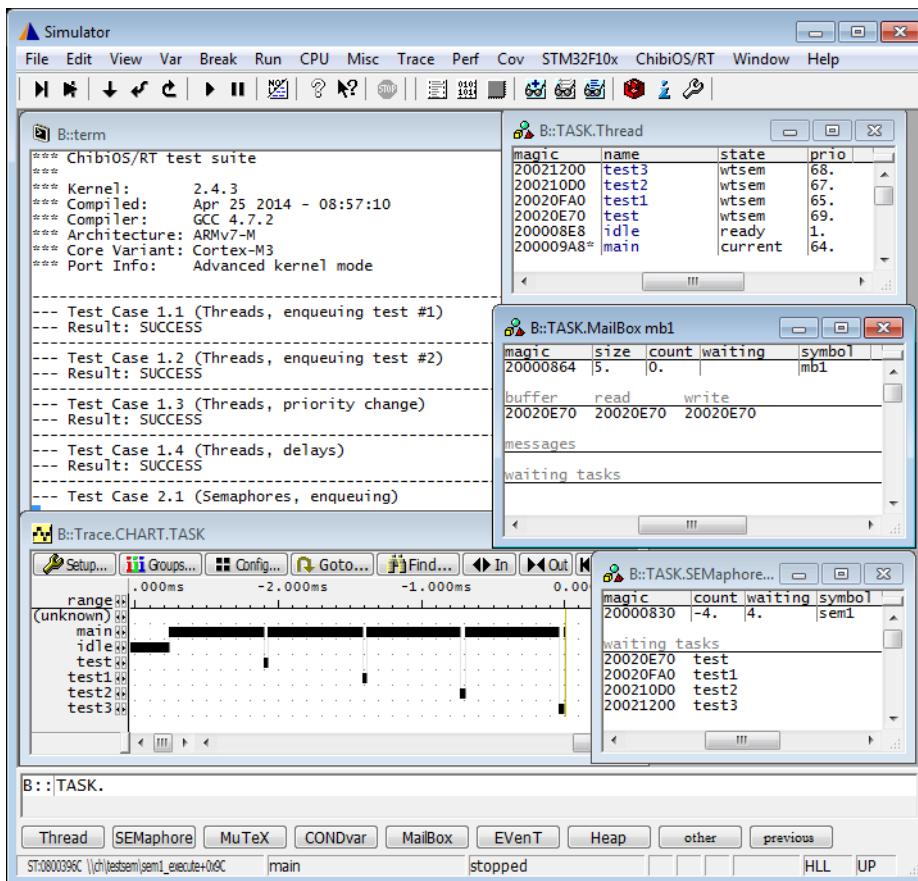

The OS Awareness for ChibiOS contains special extensions to the TRACE32 Debugger. This manual describes the additional features, such as additional commands and statistic evaluations.

Terminology

Note the terminology: while ChibiOS talks about “threads”, the OS Awareness uses the term “task”. They are used interchangeably in this context.

Architecture-independent information:

- **“Training Basic Debugging”** (training_debugger.pdf): Get familiar with the basic features of a TRACE32 debugger.
- **“T32Start”** (app_t32start.pdf): T32Start assists you in starting TRACE32 PowerView instances for different configurations of the debugger. T32Start is only available for Windows.
- **“General Commands”** (general_ref_<x>.pdf): Alphabetic list of debug commands.

Architecture-specific information:

- **“Processor Architecture Manuals”**: These manuals describe commands that are specific for the processor architecture supported by your Debug Cable. To access the manual for your processor architecture, proceed as follows:
 - Choose **Help** menu > **Processor Architecture Manual**.
- **“OS Awareness Manuals”** (rtos_<os>.pdf): TRACE32 PowerView can be extended for operating system-aware debugging. The appropriate OS Awareness manual informs you how to enable the OS-aware debugging.

Supported Versions

Currently ChibiOS/RT is supported for the following versions:

- Versions 2.4.x, 2.6.x, 3.0.x, 16.x to 19.x on ARM/Cortex.

The **TASK.CONFIG** command loads an extension definition file called “chibios.t32” (directory “`~/demo/<arch>/kernel/chibios`”). It contains all necessary extensions.

Automatic configuration tries to locate the ChibiOS internals automatically. For this purpose all symbol tables must be loaded and accessible at any time the OS Awareness is used.

If you want to display the OS objects “On The Fly” while the target is running, you need to have access to memory while the target is running. In case of ICD, you have to enable **SYStem.MemAccess** or **SYStem.CpuAccess** (CPU dependent).

For system resource display and analyzer functionality, you can do an automatic configuration of the OS Awareness. For this purpose it is necessary that all system internal symbols are loaded and accessible at any time, the OS Awareness is used. Each of the **TASK.CONFIG** arguments can be substituted by ‘0’, which means that this argument will be searched and configured automatically. For a fully automatic configuration, omit all arguments:

Format:	TASK.CONFIG chibios.t32
---------	--------------------------------

See also the example “`~/demo/<arch>/kernel/chibios/chibios.cmm`”.

To get a quick access to the features of the ChibiOS debugger with your application, follow the following roadmap:

1. Start the TRACE32 Debugger.
2. Load your application as normal.
3. Execute the command
TASK.CONFIG ~~/demo/<arch>/kernel/chibios/chibios.t32
(See "[Configuration](#)").
4. Execute the command
MENU.ReProgram ~~/demo/<arch>/kernel/chibios/chibios.men
(See "[ChibiOS Specific Menu](#)").
5. Start your application.

Now you can access the ChibiOS extensions through the menu.

In case of any problems, please carefully read the previous Configuration chapter.

Hooks & Internals in ChibiOS

No hooks are used in the kernel.

For retrieving the kernel data and structures, the OS Awareness uses the global kernel symbols and structure definitions. Ensure that access to those structures is possible every time when features of the OS Awareness are used.

In order to display the threads list, set the Chibios configuration "CH_CFG_USE_REGISTRY" as TRUE.

Be sure that your application is compiled and linked with debugging symbols switched on.

The OS Awareness for ChibiOS supports the following features.

Display of Kernel Resources

The extension defines new commands to display various kernel resources. Information on the following ChibiOS components can be displayed:

TASK.Threads	Threads
TASK.SEMaphore	Semaphores
TASK.MuTeX	Mutexes
TASK.CONDvar	Condition Variables
TASK.MailBox	Mailboxes
TASK.Heap	Heaps
TASK.Pool	Memory pools
TASK.Queue	Queues
TASK.VTimer	Virtual timers

For a description of the commands, refer to chapter “[ChibiOS Commands](#)”.

If your hardware allows memory access while the target is running, these resources can be displayed “On The Fly”, i.e. while the application is running, without any intrusion to the application.

Without this capability, the information will only be displayed if the target application is stopped.

Task Stack Coverage


For stack usage coverage of tasks, you can use the **TASK.STack** command. Without any parameter, this command will open a window displaying with all active tasks. If you specify only a task magic number as parameter, the stack area of this task will be automatically calculated.

To use the calculation of the maximum stack usage, a stack pattern must be defined with the command **TASK.STack.PATtern** (default value is zero).

To add/remove one task to/from the task stack coverage, you can either call the **TASK.STack.ADD** or **TASK.STack.ReMove** commands with the task magic number as the parameter, or omit the parameter and select the task from the **TASK.STack.*** window.

It is recommended to display only the tasks you are interested in because the evaluation of the used stack space is very time consuming and slows down the debugger display.

ChibiOS itself does not store information about the stack size of a task. To calculate the stack size and stack endings, the debugger tries to determine the stack characteristics from the work area of the task. If this fails, no stack coverage for this task is available.

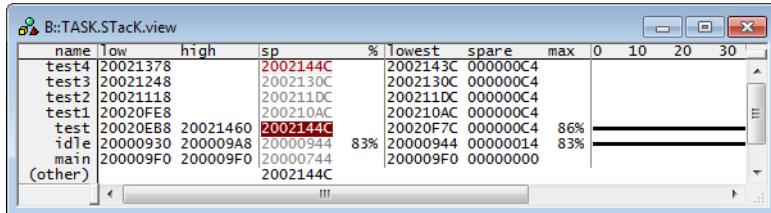

The screenshot shows a Windows-style application window titled 'B::TASK.Stack.view'. It contains a table with columns: name, low, high, sp, %, lowest, spare, max, 0, 10, 20, 30. The table lists tasks and their stack information. For example, 'test4' has a stack pointer (sp) at 2002144C, while 'main' has an sp of 200009F0. The 'spare' column shows stack usage percentages (e.g., 83% for test1, 86% for test2). The 'max' column shows the maximum stack size (e.g., 0x400 for test1, 0x200 for test2). The '0', '10', '20', and '30' columns likely represent memory addresses.

name	low	high	sp	%	lowest	spare	max	0	10	20	30
test4	20021378		2002144C		2002143C	000000C4					
test3	20021248		2002130C		2002130C	000000C4					
test2	20021118		200211DC		200211DC	000000C4					
test1	20020FE8		200210AC		200210AC	000000C4					
test	20020EB8	20021460	2002144C		20020F7C	000000C4	86%				
idle	20000930	200009A8	20000944	83%	20000944	00000014	83%				
main	200009F0	200009F0	20000744		200009F0	00000000					
(other)			2002144C								

As a workaround, you can use **TASK.Stack.ADD** to set the stack characteristics of each task manually. Example to set the stack of task "test1" to start address 0x20020FE8 with a size of 1024 bytes:

```
; Adapt stack characteristics of task named "test1"
; Stack of this task starts at 0x20020FE8 with a size of 0x400 bytes

TASK.Stack.view
TASK.Stack.ADD task.magic("test1") 0x20020FE8++(0x400-1)
```

Task-Related Breakpoints

Any breakpoint set in the debugger can be restricted to fire only if a specific task hits that breakpoint. This is especially useful when debugging code which is shared between several tasks. To set a task-related breakpoint, use the command:

Break.Set <address>|<range> [/<option>] /TASK <task> Set task-related breakpoint.

- Use a magic number, task ID, or task name for <task>. For information about the parameters, see ["What to know about the Task Parameters"](#) (general_ref_t.pdf).
- For a general description of the **Break.Set** command, please see its documentation.

By default, the task-related breakpoint will be implemented by a conditional breakpoint inside the debugger. This means that the target will *always* halt at that breakpoint, but the debugger immediately resumes execution if the current running task is not equal to the specified task.

NOTE: Task-related breakpoints impact the real-time behavior of the application.


On some architectures, however, it is possible to set a task-related breakpoint with *on-chip* debug logic that is less intrusive. To do this, include the option **/Onchip** in the **Break.Set** command. The debugger then uses the on-chip resources to reduce the number of breaks to the minimum by pre-filtering the tasks.

For example, on ARM architectures: *If* the RTOS serves the Context ID register at task switches, and *if* the debug logic provides the Context ID comparison, you may use Context ID register for less intrusive task-related breakpoints:

Break.CONFIG.UseContextID ON	Enables the comparison to the whole Context ID register.
Break.CONFIG.MatchASID ON	Enables the comparison to the ASID part only.
TASK.List.tasks	If TASK.List.tasks provides a trace ID (traceid column), the debugger will use this ID for comparison. Without the trace ID, it uses the magic number (magic column) for comparison.

When single stepping, the debugger halts at the next instruction, regardless of which task hits this breakpoint. When debugging shared code, stepping over an OS function may cause a task switch and coming back to the same place - but with a different task. If you want to restrict debugging to the current task, you can set up the debugger with **SETUP.StepWithinTask ON** to use task-related breakpoints for single stepping. In this case, single stepping will always stay within the current task. Other tasks using the same code will not be halted on these breakpoints.

If you want to halt program execution as soon as a specific task is scheduled to run by the OS, you can use the **Break.SetTask** command.

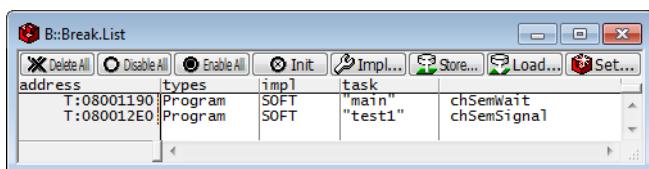

Task Context Display

You can switch the whole viewing context to a task that is currently not being executed. This means that all register and stack-related information displayed, e.g. in **Register**, **Data.List**, **Frame** etc. windows, will refer to this task. Be aware that this is only for displaying information. When you continue debugging the application (**Step** or **Go**), the debugger will switch back to the current context.

To display a specific task context, use the command:

Frame.TASK [<task>] Display task context.


- Use a magic number, task ID, or task name for **<task>**. For information about the parameters, see **"What to know about the Task Parameters"** (general_ref_t.pdf).
- To switch back to the current context, omit all parameters.

To display the call stack of a specific task, use the following command:

Frame /Task <task> Display call stack of a task.

If you'd like to see the application code where the task was preempted, then take these steps:

1. Open the **Frame /Caller /Task <task>** window.
2. Double-click the line showing the OS service call.

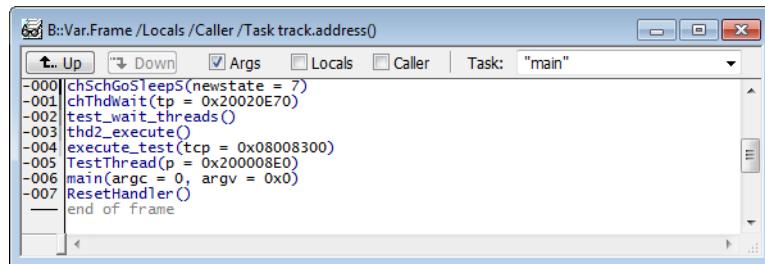


Dynamic Task Performance Measurement

The debugger can execute a dynamic performance measurement by evaluating the current running task in changing time intervals. Start the measurement with the commands **PERF.Mode TASK** and **PERF.Arm**, and view the contents with **PERF.ListTASK**. The evaluation is done by reading the 'magic' location (= current running task) in memory. This memory read may be non-intrusive or intrusive, depending on the **PERF.METHOD** used.

If **PERF** collects the PC for function profiling of processes in MMU-based operating systems (**SYSystem.Option.MMUSPACES ON**), then you need to set **PERF.MMUSPACES**, too.

For a general description of the **PERF** command group, refer to **“General Commands Reference Guide P”** (general_ref_p.pdf).

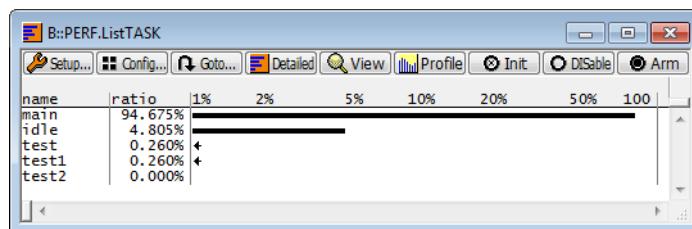

NOTE:



This feature is *only* available, if your debug environment is able to trace task switches (program flow trace is not sufficient). It requires either an on-chip trace logic that is able to generate task information (eg. data trace), or a software instrumentation feeding one of TRACE32 software based traces (e.g. [FDX](#) or [Logger](#)). For details, refer to “[OS-aware Tracing](#)” (glossary.pdf).

Based on the recordings made by the [Trace](#) (if available), the debugger is able to evaluate the time spent in a task and display it statistically and graphically.

To evaluate the contents of the trace buffer, use these commands:

Trace.List List.TASK DEFault	Display trace buffer and task switches
Trace.STATistic.TASK	Display task runtime statistic evaluation
Trace.Chart.TASK	Display task runtime timechart
Trace.PROfileSTATistic.TASK	Display task runtime within fixed time intervals statistically
Trace.PROfileChart.TASK	Display task runtime within fixed time intervals as colored graph
Trace.FindAll Address TASK.CONFIG(magic)	Display all data access records to the “magic” location
Trace.FindAll CYcle owner OR CYcle context	Display all context ID records

The start of the recording time, when the calculation doesn't know which task is running, is calculated as “(unknown)”.

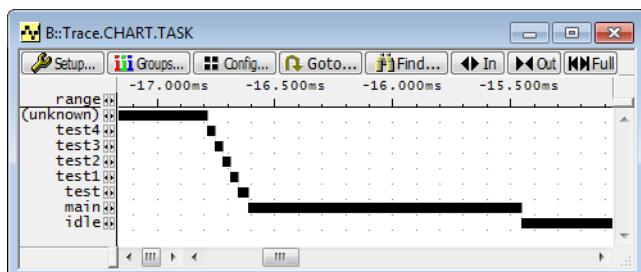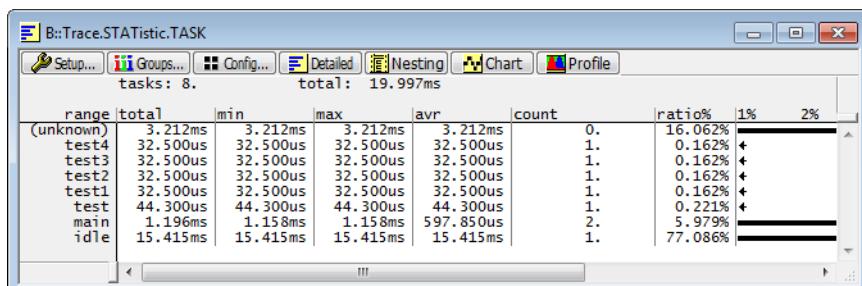

NOTE:

This feature is *only* available, if your debug environment is able to trace task switches (program flow trace is not sufficient). It requires either an on-chip trace logic that is able to generate task information (eg. data trace), or a software instrumentation feeding one of TRACE32 software based traces (e.g. [FDX](#) or [Logger](#)). For details, refer to “[OS-aware Tracing](#)” (glossary.pdf).

All function-related statistic and time chart evaluations can be used with task-specific information. The function timings will be calculated dependent on the task that called this function. To do this, in addition to the function entries and exits, the task switches must be recorded.

To do a selective recording on task-related function runtimes based on the data accesses, use the following command:

```
; Enable flow trace and accesses to the magic location
Break.Set TASK.CONFIG(magic) /TraceData
```



To do a selective recording on task-related function runtimes, based on the Arm Context ID, use the following command:

```
; Enable flow trace with Arm Context ID (e.g. 32bit)
ETM.ContextID 32
```

To evaluate the contents of the trace buffer, use these commands:


Trace.ListNesting	Display function nesting
Trace.STATistic.Func	Display function runtime statistic
Trace.STATistic.TREE	Display functions as call tree
Trace.STATistic.sYmbol /SplitTASK	Display flat runtime analysis
Trace.Chart.Func	Display function timechart
Trace.Chart.sYmbol /SplitTASK	Display flat runtime timechart

The start of the recording time, when the calculation doesn't know which task is running, is calculated as “(unknown)”.

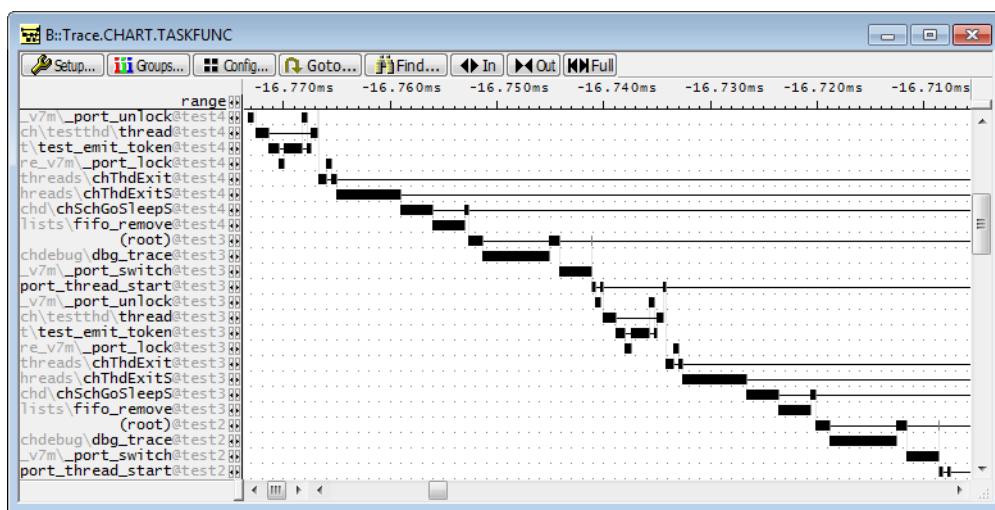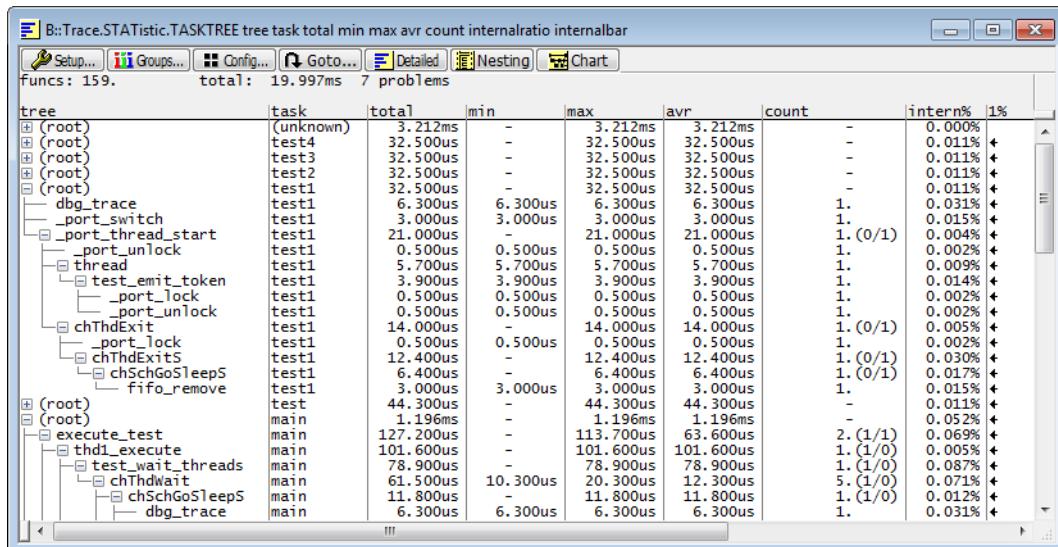

The menu file “chibios.men” contains a menu with ChibiOS specific menu items. Load this menu with the [MENU.ReProgram](#) command.

You will find a new menu called **ChibiOS/RT**.

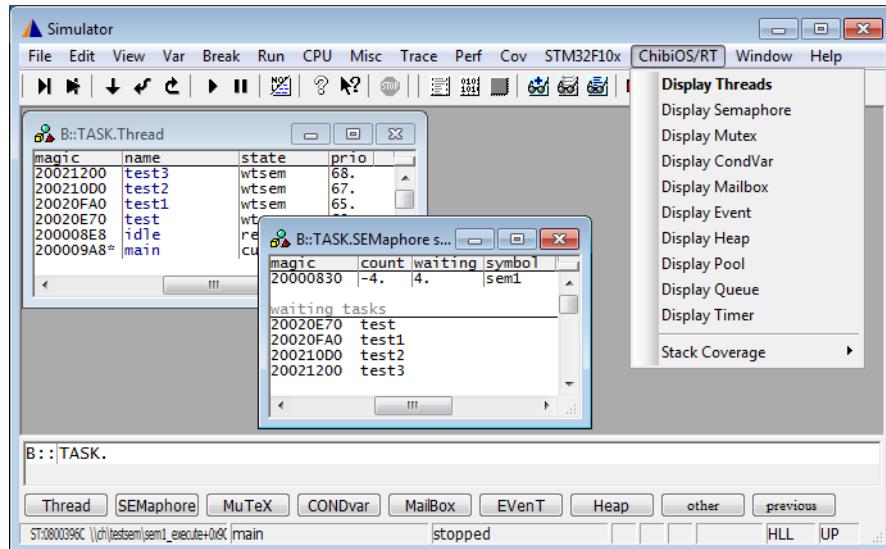

- The **Display** menu items launch the appropriate kernel resource display windows.
- The **Stack Coverage** submenu starts and resets the ChibiOS specific stack coverage, and provide an easy way to add or remove threads from the stack coverage window.

In addition, the menu file (*.men) modifies these menus on the TRACE32 [main menu bar](#):


- The **Trace** menu is extended. In the **List** submenu, you can choose if you want a trace list window to show only thread switches (if any) or thread switches together with the default display.
- The **Perf** menu contains additional submenus for thread runtime statistics, thread related function runtime statistics or statistics on task states.

TASK.CONDvar

Display condition variables

Format: **TASK.CONDvar <cond_var>**

Displays detailed information about a condition variable. Specify a variable or address that contains the condition variable.

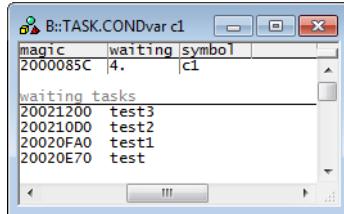


The field “magic” and other fields are mouse sensitive, double clicking on them opens appropriate windows. Right clicking on them will show a local menu.

TASK.EVenT

Display events

Format: **TASK.EVenT <event>**


Displays detailed information about an event. Specify a variable or address that contains the event.

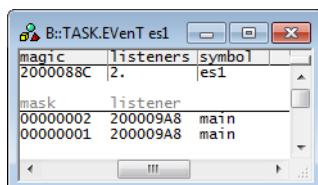

The field “magic” and other fields are mouse sensitive, double clicking on them opens appropriate windows. Right clicking on them will show a local menu.

Format: **TASK.Heap <heap>**

Displays detailed information about a heap. Specify a variable or address that contains the heap.

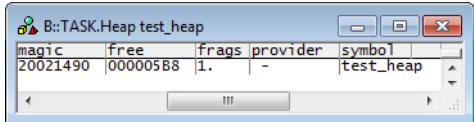


The field “magic” and other fields are mouse sensitive, double clicking on them opens appropriate windows. Right clicking on them will show a local menu.

TASK.MailBox

Display mailboxes

Format: **TASK.MailBox <mailbox>**


Displays detailed information about a mailbox. Specify a variable or address that contains the mailbox.

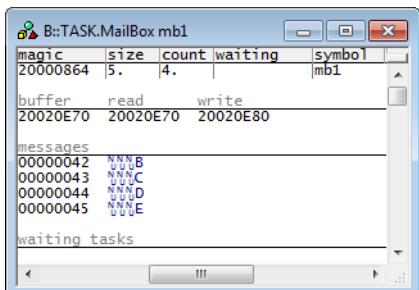

The field “magic” and other fields are mouse sensitive, double clicking on them opens appropriate windows. Right clicking on them will show a local menu.

Format: **TASK.MuTeX <mutex>**

Displays detailed information about a mutex. Specify a variable or address that contains the mutex.

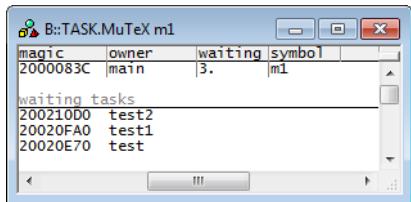


The field "magic" and other fields are mouse sensitive, double clicking on them opens appropriate windows. Right clicking on them will show a local menu.

TASK.Pool

Display memory pools

Format: **TASK.Pool <pool>**


Displays detailed information about a memory pool. Specify a variable or address that contains the pool.

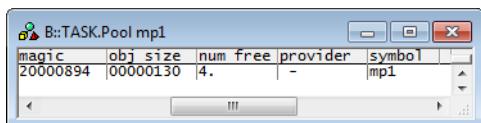

The field "magic" and other fields are mouse sensitive, double clicking on them opens appropriate windows. Right clicking on them will show a local menu.

Format: **TASK.Queue <queue>**


Displays detailed information about a queue. Specify a variable or address that contains the queue.

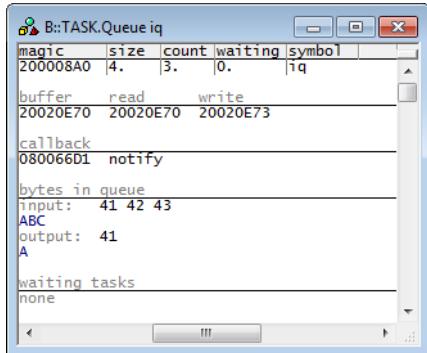

The field "magic" and other fields are mouse sensitive, double clicking on them opens appropriate windows. Right clicking on them will show a local menu.

Format: **TASK.SEMaphore <semaphore>**

Displays detailed information about a semaphore. Specify a variable or address that contains the semaphore.

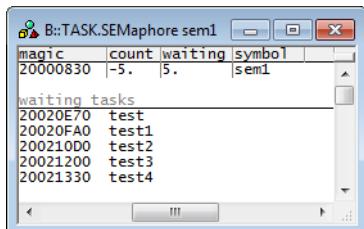


The field "magic" and other fields are mouse sensitive, double clicking on them opens appropriate windows. Right clicking on them will show a local menu.

Format: **TASK.Thread** [<thread>]

Displays the thread table of ChibiOS or detailed information about one specific thread.

Without any arguments, a table with all created threads will be shown.

Specify a thread name or magic number to display detailed information on that thread.

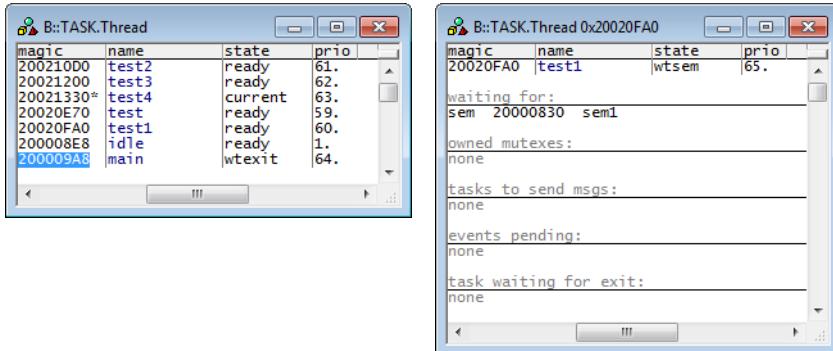


“magic” is a unique ID, used by the OS Awareness to identify a specific threads (address of the thread structure).

The field “magic” and other fields are mouse sensitive, double clicking on them opens appropriate windows. Right clicking on them will show a local menu.

Format: **TASK.VTimer**

Displays a list of all created virtual timers.

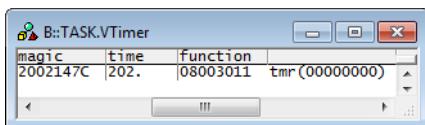

The field “magic” and other fields are mouse sensitive, double clicking on them opens appropriate windows. Right clicking on them will show a local menu.

There are special definitions for ChibiOS specific PRACTICE functions.

TASK.CONFIG()

OS Awareness configuration information

Syntax: **TASK.CONFIG(magic | magicsize)**

Parameter and Description:

magic	Parameter Type: String (<i>without</i> quotation marks). Returns the magic address, which is the location that contains the currently running task (i.e. its task magic number).
magicsize	Parameter Type: String (<i>without</i> quotation marks). Returns the size of the task magic number (1, 2 or 4).

Return Value Type: [Hex value](#).