

Training Source Level Debugging

MANUAL

Training Source Level Debugging

TRACE32 Online Help

TRACE32 Directory

TRACE32 Index

TRACE32 Training	
Training Source Level Debugging	1
Load the Application Program	5
The Symbol Database	22
Structure of the Internal Symbol Database	22
General Information on the Symbol Database	23
Symbol Browser	24
Details about a Selected Symbol	29
Searching in Source Files	31
Display Variables	33
Watch Window	33
View Window	35
Referenced Variables	36
Local Variables	37
Stack Frame	38
Special Display for Arrays	39
Linked Lists	42
Change a Variable Value	44
Format Variable	47
Format a Variable using the Format Dialog Box	47
Format a Variable Using the Command Line	57
General SETUPs	58
Variable Monitoring	59
Basics	59
Preparation	60
Format Option %E	62
Var.PROfile Command	64
Variable Logging	66
SNOOPer Trace	66
Basics	66
The Logging Interval	75
Display Options	77
Logging of Multiple Variables	80

Logging in an SMP System	83
Document the Logging Results	84
Summary	84
Script Example	85
Var.LOG Command	86
Testing of Functions	88

Training Source Level Debugging

Version 06-Jun-2024

Load the Application Program

Data.LOAD <filename> [/<option>]

General load command

Data.LOAD.<sub_cmd> <filename> [/<option>]

Compiler specific load command

It is recommended to use the compiler/format specific **Data.LOAD** command thereby all compiler/format specific options can be used.

Which actions are performed by TRACE32 when the Data.LOAD command is executed?

- All symbol and debug information already available in TRACE32 is removed.
- The code/data provided by <file> is loaded to the target memory.
- The symbol and debug information provided by <file> is loaded into TRACE32.
- The paths for the HLL source files provided by <file> are loaded into TRACE32.
- A TRACE32 symbol database is generated out of the loaded information.

Options that refer to Code/data

The options that refer to code/data are mainly used for the following tasks:

- to verify that code/data is loaded correctly.
- to suppress the loading of code/data if the correct code/data is already in the target.

DIFF	Data in the memory is compared against the file, the memory is not changed. <ul style="list-style-type: none">• FOUND() returns TRUE, when a difference between the file and the memory is found.• FOUND() returns FALSE, when no difference between the file and the memory is found.
NoCODE	Symbol and debug information plus source path information gets loaded to the debugger, but no code/data is downloaded to the target memory. Useful if the code/data is already in memory.

```
Data.LOAD.Elf demo.elf
Data.LOAD.Elf demo.elf /DIFF

IF FOUND()
    PRINT %ERROR "Loading of program failed"

Data.LOAD.Elf demo.elf /NoCODE
```

Options that Refer to the Symbol and Debug Information

The options that refer to the symbol and debug information are mainly used to relocate the symbol information.

```
; relocate all symbols by 2000
symbol.RELOCate.shift 2000

; Load the symbol and debug information from the file t_li_elf.axf and
; relocate all symbols of the section t_li_elf.axf to address 3000
sYmbol.List.SECTION
Data.LOAD.Elf thumble.axf /RELOC t_li_elf.axf AT 3000 /NoCODE
```

sYmbol.RELOCate.shift <offset>

Relocate code and data symbols by <offset>

Data.LOAD.Elf <file> /RELOC <sector> AT <address>

Relocate the specified sector to the defined address

Data.LOAD.Elf <file> /RELOC <sector> AFTER <sector_other>

Relocated the specified sector after an another sector

sYmbol.List.SECTION

List the section information of the TRACE32 symbol database

NoClear	By default, whenever a new Data.LOAD command is started, the already available symbol and debug information is removed. With this option the already available symbol and debug information is not removed. This option is necessary if more than one program is loaded.
More	This option speeds up the downloading of large projects consisting of several programs. This option suppresses the generation of the internal symbol database when using the Data.LOAD command.

```
Data.LOAD file1 /More ; load file1 but suppress the
; generation of the internal
; symbol database

Data.LOAD file2 /NoClear /More ; load file2 but don't remove the
; already available symbol and
; debug information before
; loading and suppress the
; generation of the internal
; symbol database

Data.LOAD file3 /NoClear /More

.


.

.

Data.LOAD filen /NoClear ; load filen but don't remove the
; already available symbol and
; debug information before
; loading, this is the last file
; so generate the internal symbol
; database now
```


A video tutorial about the source path correction can be found here:

support.lauterbach.com/kb/articles/displaying-the-source-code

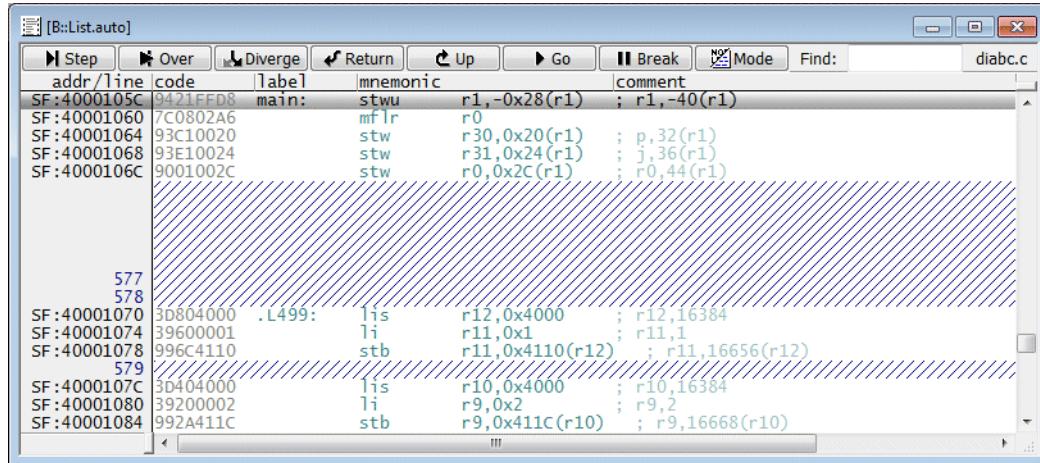


addr/line	code	label	mnemonic	operands	comment
SF:4000105C	9421FFD8	main:	stwu	r1,-0x28(r1)	; r1,-40(r1)
SF:40001060	7C0802A6		mfir	r0	
SF:40001064	93C10020		stw	r30,0x20(r1)	; p,32(r1)
SF:40001068	93E10024		stw	r31,0x24(r1)	; j,36(r1)
SF:4000106C	9001002C		stw	r0,0x2C(r1)	; r0,44(r1)
577					
578					
SF:40001070	3D804000	.L499:	lis	r12,0x4000	; r12,16384
SF:40001074	39600001		li	r11,0x1	; r11,1
SF:40001078	996C4110		stb	r11,0x4110(r12)	; r11,16656(r12)
579					
SF:4000107C	3D404000		lis	r10,0x4000	; r10,16384
SF:40001080	39200002		li	r9,0x2	; r9,2
SF:40001084	992A411C		stb	r9,0x411C(r10)	; r9,16668(r10)
			!!!		

If the **Source Listing** displays hatched areas instead of the source code information, the source code paths provided by the loaded program have to be corrected. These corrections become necessary because the compile environment differs from the debug environment. The graphic below shows a very simple example.

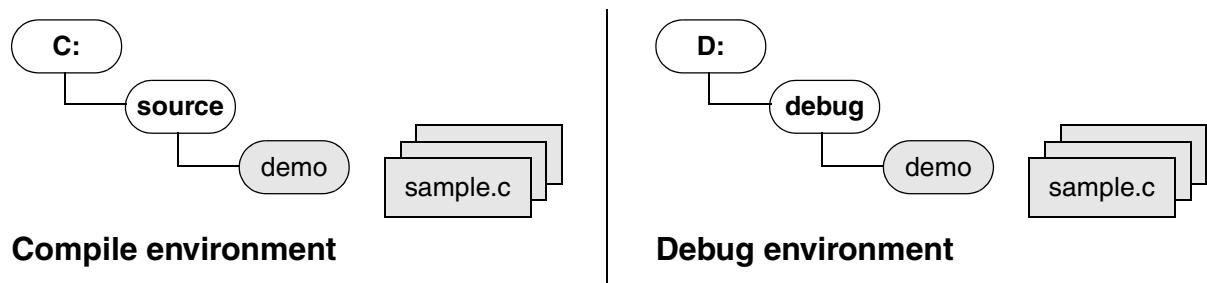

To inspect the paths for the source code files provided by the loaded program proceed as shown below:

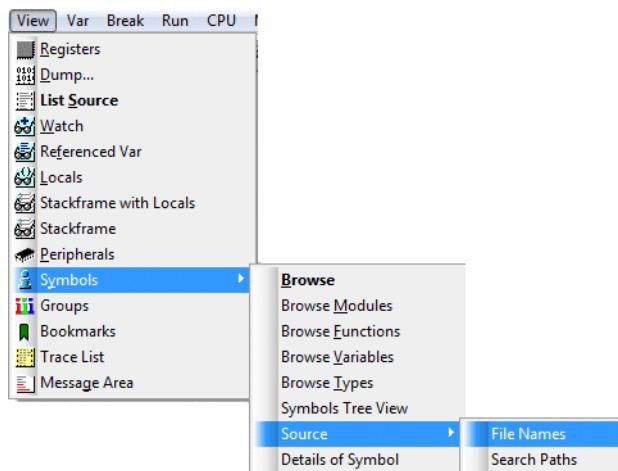

module	source
\\diabc\diabc	I:\T32DEMO\POWERPC\55xx\code_0x40000020_data_0x40004000\diabc.c

The compile paths provided by the loaded program are listed in the **source** column

file	size	time	state
I:\T32DEMO\POWERPC\55xx\code_0x40000020_data_0x40004000\diabc.c			error

error in the state column indicates that a required file was not found in the current debug environment

sYmbol.List.SOURCE Display source file details.

TRACE32 provides the following ways to correct the compile paths so they fit the paths in the debug environment:

Example 1: Provide the source paths directly

- + Quick and easy
- + Recommended for small project
- + Source paths can be corrected without reloading the program

Example 2: Translate compile path to debug path

- + Recommended for large projects
- + Source paths can be corrected without reloading the program
- + Not flexible enough for a generic script


Example 3: Personalized debug paths

- + Recommended for large projects
- + Flexible for generic scripts
- + Requires a fixed location for the script that loads the program

Example 4: Convert cygdrive paths to Window paths


Example 5: Load Elf file with relative paths only

Example 1: Provide the source paths directly

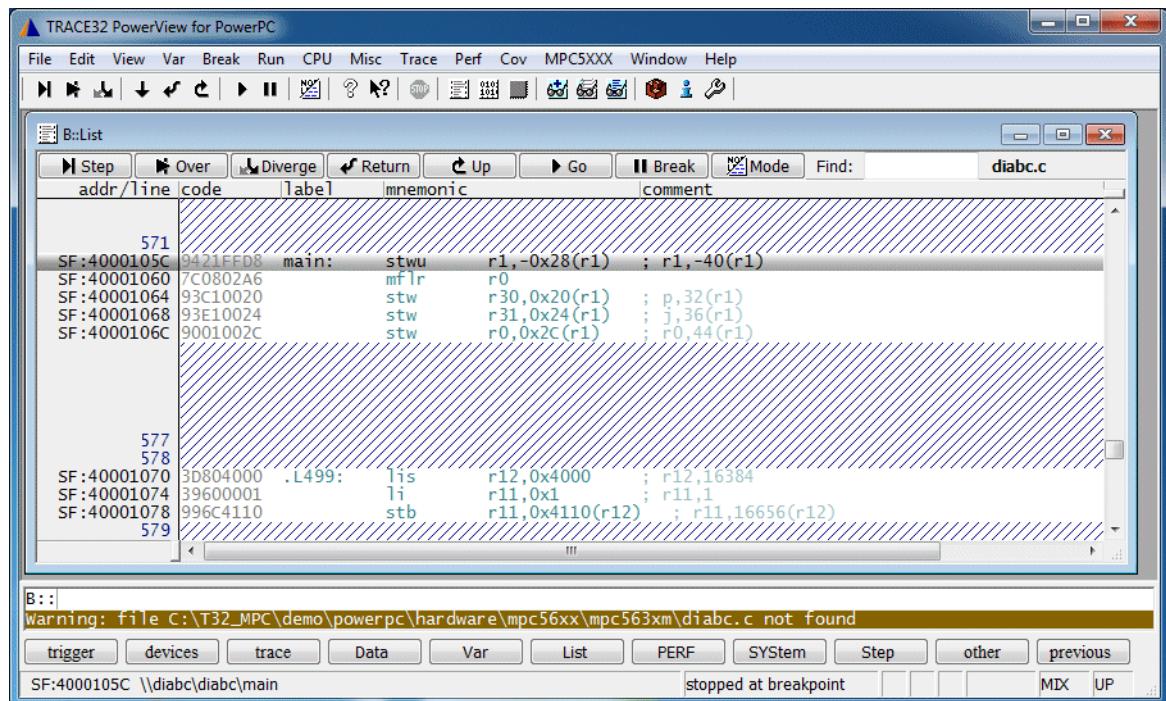


TRACE32 displays a warning when a required source file was not found and the source listing displays hatched areas instead of the source code information. One way to solve this issue is to directly provide the correct path for the source file.

1. Open a **sYmbol.SPATH.List** window.

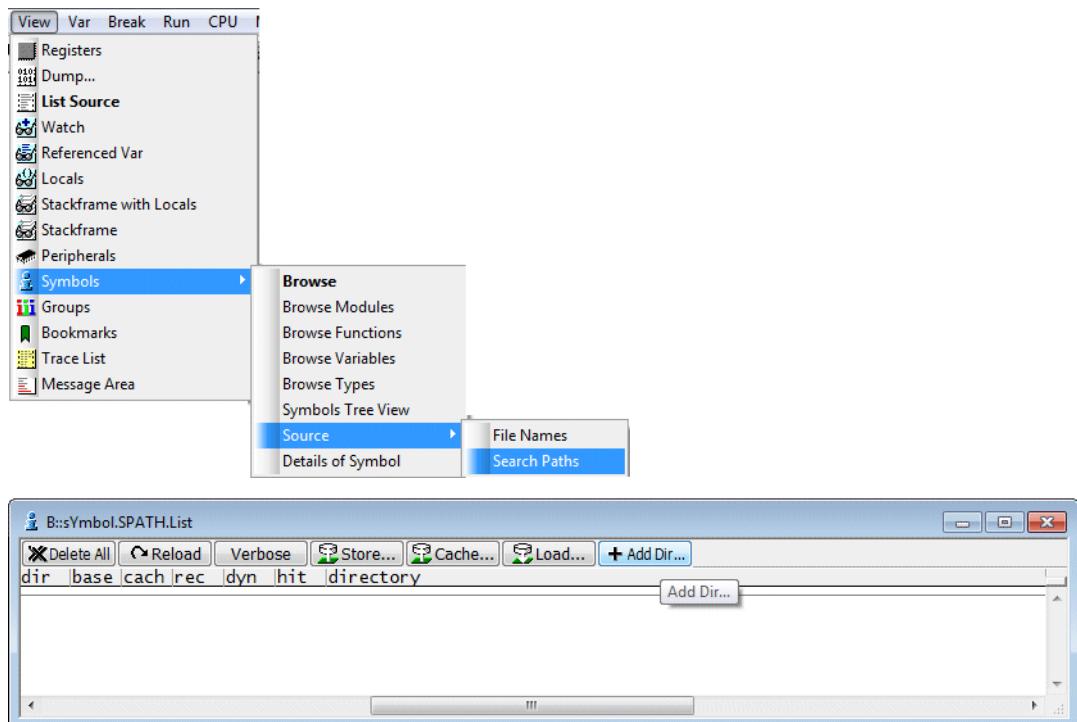


2. Use the **+AddDir ...** button in the **sYmbolSPATH.List** window to open a folder browser. Select the directory in which the missing source file is located.

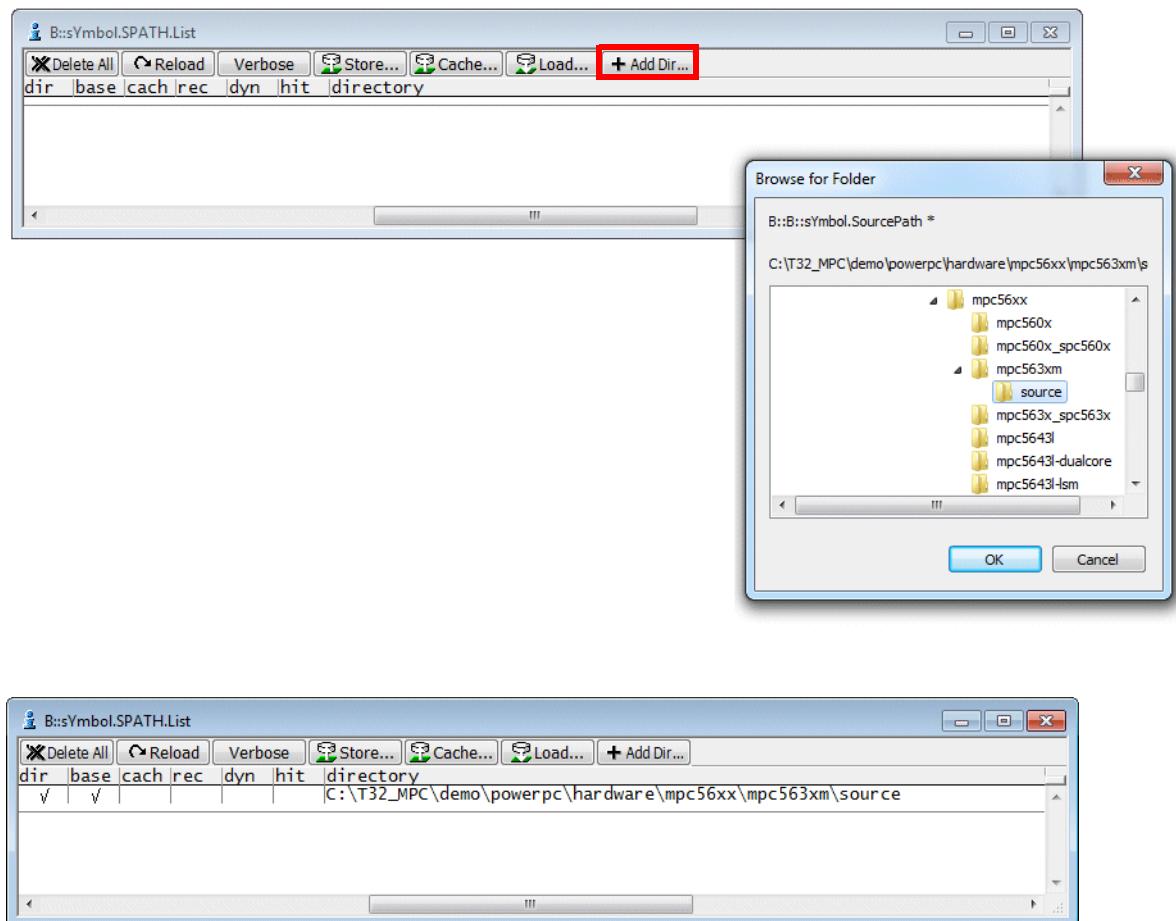

The **sYmbolSPATH.List** window lists all provided directories.


As soon as the required source file was found, its source code is visible in the **Source Listing**.

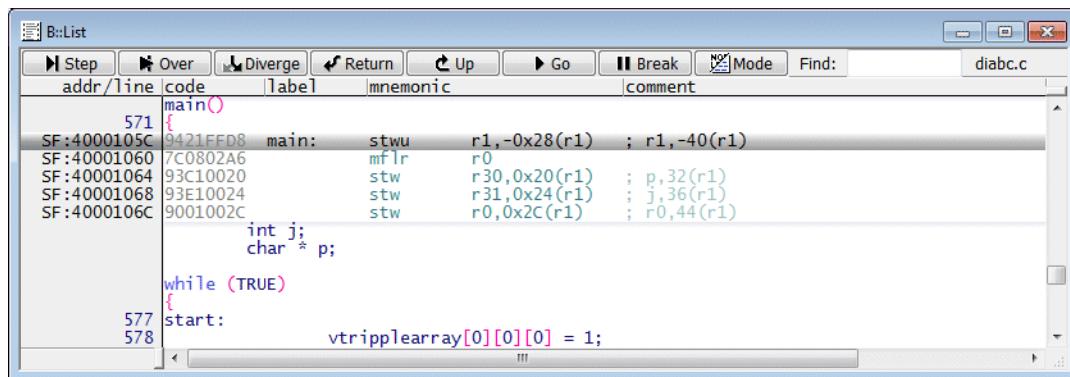


The screenshot shows the Source Listing window with the following assembly code:

```
main()
571 { main:    stwu   r1,-0x28(r1) ; r1,-40(r1)
SF:4000105C 9421FFD8    mflr   r0
SF:40001060 7C0802A6    stw    r30,0x20(r1) ; p,32(r1)
SF:40001064 93C10020    stw    r31,0x24(r1) ; j,36(r1)
SF:40001068 93E10024    stw    r0,0x2C(r1) ; r0,44(r1)
SF:4000106C 9001002C    int j;
                      char * p;
while (TRUE)
{
start:           vtripplearray[0][0][0] = 1;
}
```

If you want to check if the correct source file was used, proceed as shown below:

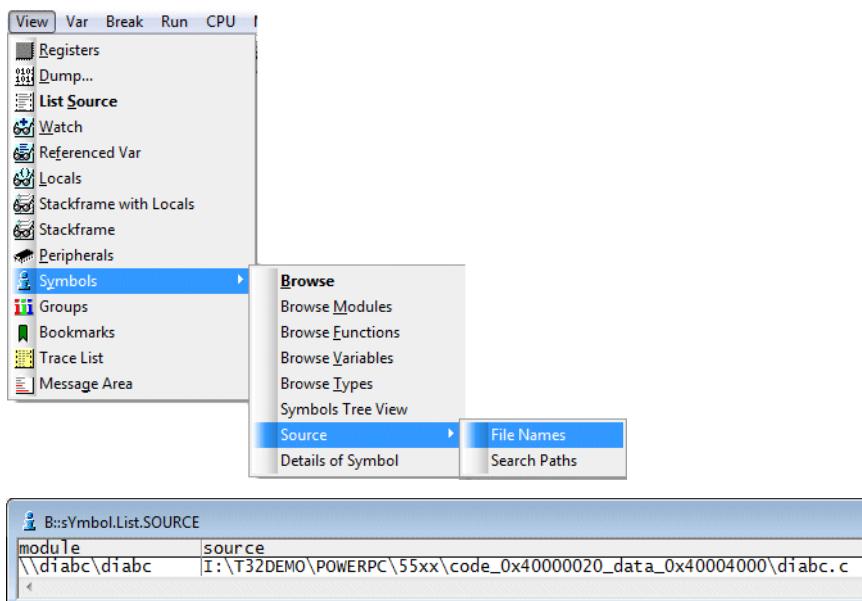

The compile paths provided by the loaded program are listed in the **source** column



The path from which a source file was actually loaded is listed in the **file** column.

sYmbol.SourcePATH.List

List source file search information.

sYmbol.SourcePATH.SetDir <directory>

Define directory as direct search path.

sYmbol.List.SOURCE

Display source file details.


Example 2: Translate compile paths to debug paths

If you have a large project with a lot of subdirectories it is work-intensive to provide all source paths directly. An easier solution works as follows:

Path information from the compile environment

module	source
\\vmlinux\\msdos	\\home\\user\\linux-kernel\\linux-3.4\\block\\partitions\\check.h
\\vmlinux\\msdos	\\home\\user\\linux-kernel\\linux-3.4\\block\\partitions\\msdos.c
\\vmlinux\\block\\scsi_ioctl	\\home\\user\\linux-kernel\\linux-3.4\\block\\scsi_ioctl.c
\\vmlinux\\ablkcipher	\\home\\user\\linux-kernel\\linux-3.4\\crypto\\ablkcipher.c
\\vmlinux\\aead	\\home\\user\\linux-kernel\\linux-3.4\\crypto\\aead.c
\\vmlinux\\ahash	\\home\\user\\linux-kernel\\linux-3.4\\crypto\\ahash.c

Source file directories in the current debug environment

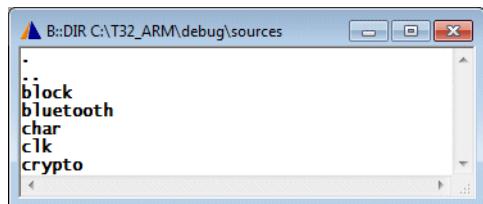

If we take a closer look e.g. to the files **msdos.c** and **aead.c**, we can see that the following command can solve the issue easily.

```
sYmbol.SourcePATH.Translate "\\home\\user\\linux-kernel\\linux-3.4" \
"C:\\T32_ARM\\debug\\sources"
```

The invalid part of the source file paths ("\\home\\user\\linux-kernel\\linux-3.4") is translated to the correct part ("C:\\T32_ARM\\debug\\sources").

The **sYmbol.SPATH.List** window shows this translation.

B::sYmbol.SPATH.List	
dir	base
\\base\\cach\\rec\\dyn\\hit\\directory	
"\\home\\user\\linux-kernel\\linux-3.4" -> "C:\\T32_ARM\\debug\\sources"	

The source files can now be loaded from the correct location.

file	state
\\home\\user\\linux-kernel\\linux-3.4\\block\\partitions\\check.h	
C:\\T32_ARM\\debug\\sources\\block\\partitions\\msdos.c	loaded
\\home\\user\\linux-kernel\\linux-3.4\\block\\scsi_ioctl.c	
\\home\\user\\linux-kernel\\linux-3.4\\crypto\\ablkcipher.c	
C:\\T32_ARM\\debug\\sources\\crypto\\aead.c	loaded
\\home\\user\\linux-kernel\\linux-3.4\\crypto\\ahash.c	

Translate *<invalid_part>* of source file paths to *<correct_part>*.

sYmbol.SourcePATH.Translate *<invalid_part> <correct_part>*


sYmbol.SourcePATH.List List source file search information.

sYmbol.List.SOURCE Display source file details.

Example 3: Personalized debug paths

Translating the compile paths to the debug paths is not flexible enough, if each user has its own debug environment. The following example shows a generic solution for a personalized debug paths.

For this generic solution it is required that the script that loads the program (here **load.cmm**) is part of the project, as shown in the example below.

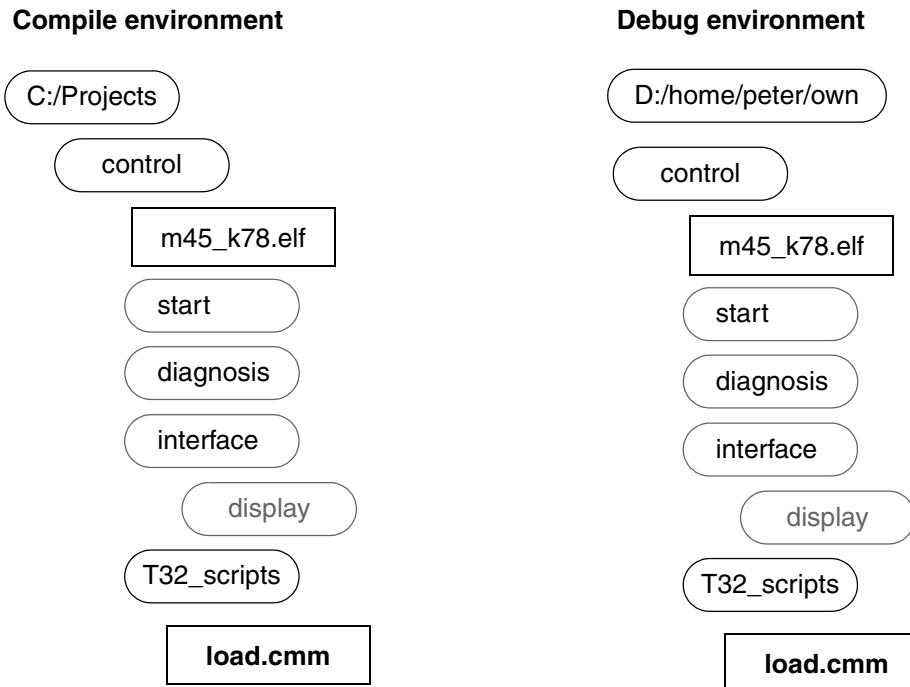

The idea is now the following:

1. When the program is loaded, the start of the compile path including the project name (here: control) is stripped by the command:

```
>Data.LOAD.<file_format> <file> /StripPART <project_name>
```

2. Now the new personalized start of the debug path has to be provided.

The presented solution takes advantage of the fact that TRACE32 includes shortcuts that represent directories and that these shortcut can be used as path prefixes. The shortcut needed for our solution is ~~~~ and it represents the directory where the currently running script is located.

~~~/.. represents exactly the start of all source paths (including the project name) in the debug environment. This new start for all source paths can be specified by the following command.

```
sYmbol.SourcePATH.SetBaseDir ~~~/..
```

The script **load.cmm** has to include the following:

```
...
; cut the following from the source paths:
; C:/Projects/control
Data.LOAD.Elf ~~~~/../m45_k78.elf /StripPART "control"

; specify new base directory (here d:/home/peter/own/control)
; for relative paths
; sYmbol.SourcePATH.SetBaseDir ~~~/..
...
...
```

## Example 4: Convert cygdrive paths to window paths

If the source files are compiled in a cygdrive enviroment, cygdrive paths are provided by the loaded program.

```
Data.LOAD.Elf sieve_pic_thumb_ii_v7.elf
```

| module                            | source                                               | file                                                 | state |
|-----------------------------------|------------------------------------------------------|------------------------------------------------------|-------|
| \\sieve_pic_thumb_ii_v7\\crt0-pic | \\cygdrive\\c\\Projects\\MyCygwinProject\\crt0-pic.s | \\cygdrive\\c\\Projects\\MyCygwinProject\\crt0-pic.s |       |
| \\sieve_pic_thumb_ii_v7\\sieve    | \\cygdrive\\c\\Projects\\MyCygwinProject\\sieve.c    | \\cygdrive\\c\\Projects\\MyCygwinProject\\sieve.c    |       |

The option **/CYGDRIVE** advises TRACE32 to convert the cygdrive paths to Windows paths.

```
Data.LOAD.Elf sieve_pic_thumb_ii_v7.elf /CYGDRIVE
```

| module                            | source                                               | file                                      | state |
|-----------------------------------|------------------------------------------------------|-------------------------------------------|-------|
| \\sieve_pic_thumb_ii_v7\\crt0-pic | \\cygdrive\\c\\Projects\\MyCygwinProject\\crt0-pic.s | c:\\Projects\\MyCygwinProject\\crt0-pic.s |       |
| \\sieve_pic_thumb_ii_v7\\sieve    | \\cygdrive\\c\\Projects\\MyCygwinProject\\sieve.c    | c:\\Projects\\MyCygwinProject\\sieve.c    |       |

**Data.LOAD.Elf <file> /CYGDRIVE** Load .elf file, convert cygdrive paths to Window paths.

**sYmbol.List.SOURCE** Display source file details.

## Example 5: Load Elf file with relative paths

If source files are compiled with relative paths, the resulting .elf file contains both, all *<relative\_path>* as well as the *<compile\_directory>*. By default TRACE32 performs as follows:

```
// Load Elf file, construct source file paths by
// combining <compile_directory><relative_path>
Data.LOAD.Elf C:/T32_ARM/demo/arm/compiler-gnu/sieve.elf
```

| module          | source                                               |
|-----------------|------------------------------------------------------|
| \\sieve\crt0    | D:\Software\demo\demo\arm\compiler\gnu\src\crt0.sx   |
| \\sieve\isr     | D:\Software\demo\demo\arm\compiler\gnu\src\isr.c     |
| \\sieve\itm     | D:\Software\demo\demo\arm\compiler\gnu\src\itm.c     |
| \\sieve\monitor | D:\Software\demo\demo\arm\compiler\gnu\src\monitor.c |
| \\sieve\sieve   | D:\Software\demo\demo\arm\compiler\gnu\src\sieve.c   |

The option **/RelPATH** advises TRACE32 to not use the *<compile\_directory>*.

```
// Load Elf file, provide only all <relative_path> for source files
Data.LOAD.Elf C:/T32_ARM/demo/arm/compiler-gnu/sieve.elf /RelPATH
```

| module          | source          |
|-----------------|-----------------|
| \\sieve\crt0    | .\src\crt0.sx   |
| \\sieve\isr     | .\src\isr.c     |
| \\sieve\itm     | .\src\itm.c     |
| \\sieve\monitor | .\src\monitor.c |
| \\sieve\sieve   | .\src\sieve.c   |

TRACE32 is trying to load the source files now relatively to the location of the ELF file.

| module          | source          | file                                           | state  |
|-----------------|-----------------|------------------------------------------------|--------|
| \\sieve\crt0    | .\src\crt0.sx   | .\src\crt0.sx                                  | loaded |
| \\sieve\isr     | .\src\isr.c     | C:\T32_ARM\demo\arm\compiler\gnu\src\isr.c     | loaded |
| \\sieve\itm     | .\src\itm.c     | .\src\itm.c                                    | loaded |
| \\sieve\monitor | .\src\monitor.c | C:\T32_ARM\demo\arm\compiler\gnu\src\monitor.c | loaded |
| \\sieve\sieve   | .\src\sieve.c   | .\src\sieve.c                                  | loaded |

If this does not work, you can provide the start of the source paths directly:

```
sYmbol.SourcePATH.SetBaseDir C:/T32_ARM/demo/arm/compiler-gnu
```

**Data.LOAD.Elf <file> /RelPATH**

Load .elf file with relative paths only.

**sYmbol.SourcePATH.SetBaseDir <base\_directory>**

Provide start of source paths directly.

**sYmbol.List.SOURCE**

Display source file details.

## Loader Options for the Virtual Memory

---

TRACE32 provides a so-called virtual memory on the host. With the following options the code is loaded into this virtual memory.

|               |                                                                 |
|---------------|-----------------------------------------------------------------|
| <b>VM</b>     | Load the code/data into the virtual memory.                     |
| <b>PlusVM</b> | Load the code/data into the target and into the virtual memory. |


```
Data.LOAD.COFF arm.abs /VM ; load code/data from <file> into the  
; virtual memory
```

```
Data.LOAD.COFF arm.abs /PlusVM ; load code data from <file> into the  
; target memory and into the virtual  
; memory
```

A detailed description of the use cases for the TRACE32 virtual memory are given in "["TRACE32 Virtual Memory"](#)" in TRACE32 Glossary, page 54 (glossary.pdf).


## Structure of the Internal Symbol Database

The symbol and debug information loaded with the **Data.LOAD** command is organized in an internal symbol database by TRACE32.

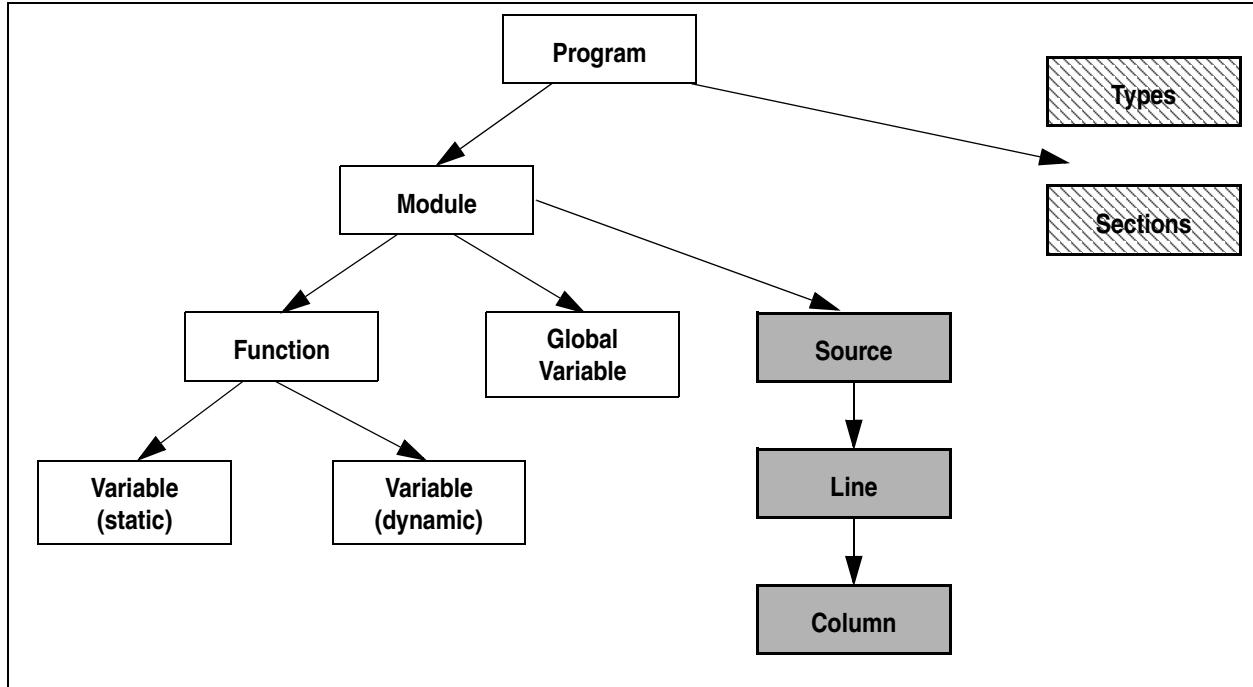

# General Information on the Symbol Database

sYmbol.STATE      Display general information about symbol database

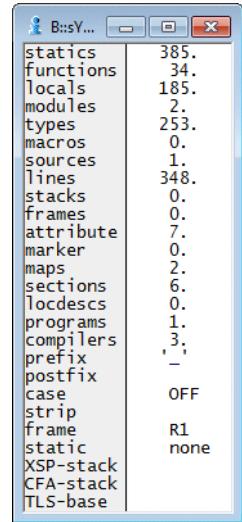

The screenshot shows a window titled 'sYmbol.STATE' with a list of statistics for a symbol database. The statistics are as follows:

| Category  | Value |
|-----------|-------|
| statics   | 385.  |
| functions | 34.   |
| locals    | 185.  |
| modules   | 2.    |
| types     | 253.  |
| macros    | 0.    |
| sources   | 1.    |
| lines     | 348.  |
| stacks    | 0.    |
| frames    | 0.    |
| attribute | 7.    |
| marker    | 0.    |
| maps      | 2.    |
| sections  | 6.    |
| locdescs  | 0.    |
| programs  | 1.    |
| compilers | 3;    |
| prefix    | -     |
| postfix   |       |
| case      | OFF   |
| strip     |       |
| frame     | R1    |
| static    | none  |
| XSP-stack |       |
| CFA-stack |       |
| TLS-base  |       |

# Symbol Browser


The screenshot shows the Lauterbach debugger's Symbol Browser window. The menu bar at the top includes 'View', 'Var', 'Break', 'Run', and 'CPU'. A context menu is open over the 'Symbols' item in the left sidebar, with options like 'Browse Modules', 'Browse Functions', 'Browse Variables', 'Browse Types', 'Symbols Tree View', 'Source', and 'Details of Symbol'. The main window displays a table of symbols with columns for name, type, and address. The 'symbol' column lists symbols such as 'ast', 'aun', 'background', 'cstr1', etc. The 'type' column shows their definitions, including 'strtype1', 'struct union1', 'int ()', and 'unsigned char [17]'. The 'address' column lists memory addresses for each symbol.

| symbol     | type                 | address              |
|------------|----------------------|----------------------|
| ast        | (strtype1)           | D:400040F8--4000410B |
| aun        | (struct union1)      | D:40004420--40004437 |
| background | (int ())             | P:40001368--400013AF |
| background |                      | P:40001368--400013AF |
| _cleanupfp |                      | D:400040E0--400040E3 |
| cstr1      | (unsigned char [17]) | D:40001380--400013C0 |
| _d_add     |                      | P:40001748--40001A0B |
| _d_dtod    |                      | P:40001A4C--40001ADF |
| _d_fge     |                      | P:40001AE0--40001BA3 |
| _d_itod    |                      | P:40001BA4--40001C1B |
| _d_mul     |                      | P:40001C48--40002157 |
| _d_sub     |                      | P:40001A0C--40001A4B |
| def        | (struct abc)         | D:400040C0--400040C7 |
| enumvar    | (int)                | D:400040D0--400040D3 |

**sYmbol.Browse** [<name\_pattern> [<type\_pattern>]]

Browse symbol information

```
sYmbol.Browse a*
sYmbol.Browse a* struct*
sYmbol.Browse * *struct*
```

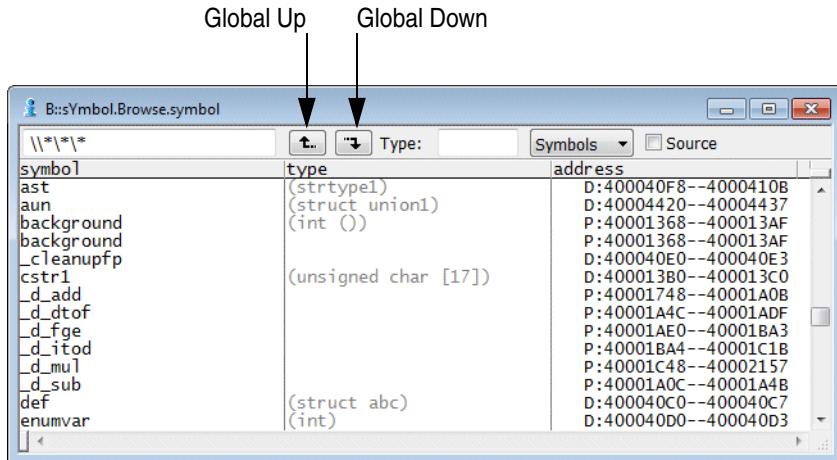

W\* (all programs)

Program

W\*W\* (all modules)

Module

W\*W\*W\* (all functions, all global variables)


Function

Global Variable

W\*W\*W\*W\* (all local variables)

Variable  
(static)

Variable  
(dynamic)


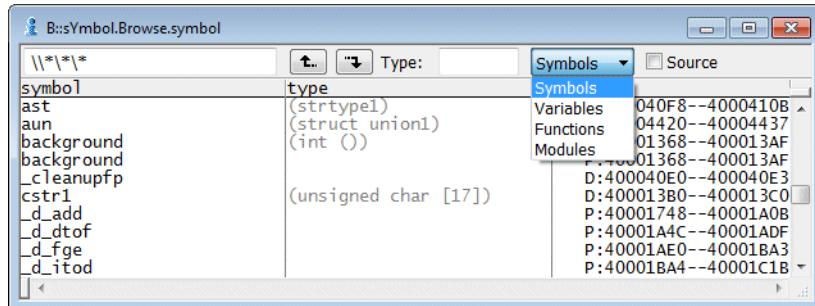


## Select display type

|                  |                       |
|------------------|-----------------------|
| <b>Symbols</b>   | Display all symbols   |
| <b>Variables</b> | Display all variables |
| <b>Functions</b> | Display all functions |
| <b>Modules</b>   | Display all modules   |

If the browsing is narrowed to **Variables** and a function is selected, the local variables of the selected function are displayed


If the browsing is narrowed to **Functions** and a function is selected, the source code of the selected function is displayed

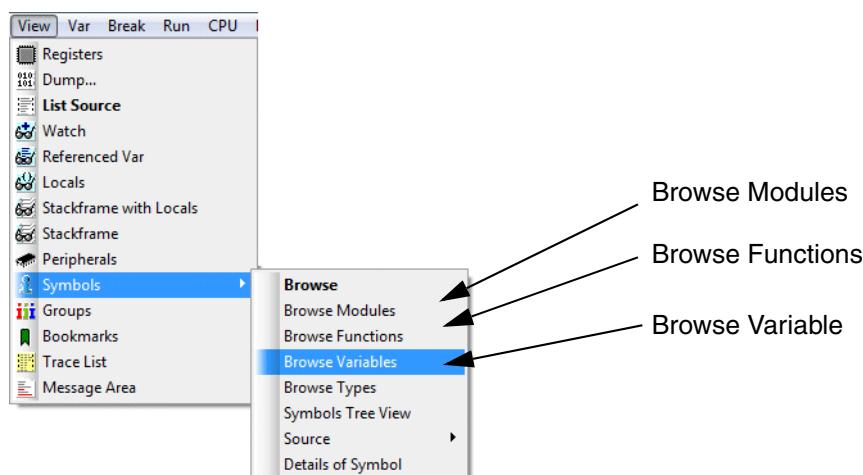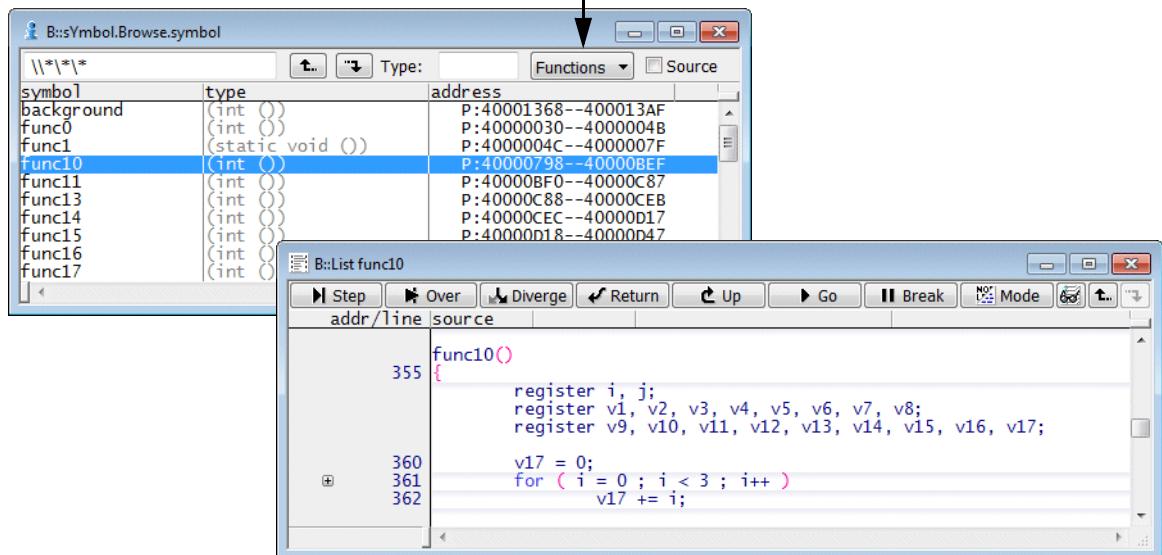

|                               |                           |
|-------------------------------|---------------------------|
| <b>sYmbol.Browse</b>          | Browse symbol information |
| <b>sYmbol.Browse.Function</b> | Browse functions          |
| <b>sYmbol.Browse.Var</b>      | Browse variables          |
| <b>sYmbol.Browse.Modules</b>  | Browse modules            |

## Browsing for a Specific Type

Display all variables of the type  
**unsigned int**

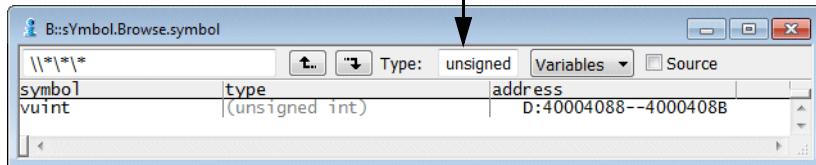


The screenshot shows a software window titled "B::sYmbol.Browse.symbol". The search bar contains "\\* \\* \\*". The "Type:" dropdown is set to "unsigned". The "Variables" button is selected. The table lists variables "symbol" and "vuint" both of type "(unsigned int)" with address "D:40004088--4000408B".

| symbol | type           | address              |
|--------|----------------|----------------------|
| vuint  | (unsigned int) | D:40004088--4000408B |

```
sYmbol.Browse.Var * unsigned int
```

Display all variables where the type  
name contains the keyword char  
(\*char\*)

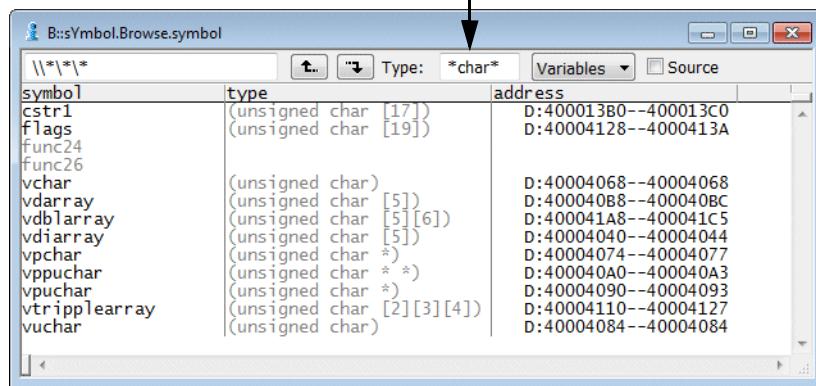


The screenshot shows a software window titled "B::sYmbol.Browse.symbol". The search bar contains "\\* \\* \\*". The "Type:" dropdown is set to "\*char\*". The "Variables" button is selected. The table lists numerous variables including "cstr1", "ctrl", "Flags", "func24", "func26", "vchar", "vdarray", "vdblarray", "vdarray", "vpchar", "vppuchar", "vpuchar", "vtripplearray", and "vuchar", all of which have type names containing the keyword "char" and are listed with their addresses.

| symbol        | type                      | address              |
|---------------|---------------------------|----------------------|
| cstr1         | (unsigned char [17])      | D:40001380--400013C0 |
| ctrl          | (unsigned char [19])      | D:40004128--4000413A |
| Flags         |                           |                      |
| func24        |                           |                      |
| func26        |                           |                      |
| vchar         | (unsigned char)           | D:40004068--40004068 |
| vdarray       | (unsigned char [5])       | D:400040B8--400040BC |
| vdblarray     | (unsigned char [5][6])    | D:400041A8--400041C5 |
| vdarray       | (unsigned char [5])       | D:40004040--40004044 |
| vpchar        | (unsigned char *)         | D:40004074--40004077 |
| vppuchar      | (unsigned char **)        | D:400040A0--400040A3 |
| vpuchar       | (unsigned char *)         | D:40004090--40004093 |
| vtripplearray | (unsigned char [2][3][4]) | D:40004110--40004127 |
| vuchar        | (unsigned char)           | D:40004084--40004084 |

```
sYmbol.Browse.Var * *char*
```

Display all variables of the type  
pointer to char (\*char \*\*)

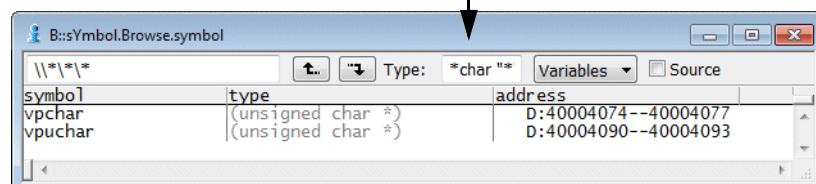

The screenshot shows a software window titled "B::sYmbol.Browse.symbol". The search bar contains "\\* \\* \\*". The "Type:" dropdown is set to "\*char \*\*". The "Variables" button is selected. The table lists variables "vpchar" and "vppuchar", both of type "(unsigned char \*\*)" with addresses "D:40004074--40004077" and "D:40004090--40004093" respectively.

| symbol   | type               | address              |
|----------|--------------------|----------------------|
| vpchar   | (unsigned char **) | D:40004074--40004077 |
| vppuchar | (unsigned char **) | D:40004090--40004093 |

```
sYmbol.Browse.Var * *char **
```

# Details about a Selected Symbol

View Var Break Run CPU

- Registers
- Dump...
- List Source
- Watch
- Referenced Var
- Locals
- Stackframe with Locals
- Stackframe
- Peripherals
- Symbols
- Groups
- Bookmarks
- Trace List
- Message Area

Browse

- Browse Modules
- Browse Functions
- Browse Variables
- Browse Types
- Symbols Tree View
- Source

Details of Symbol

B:sYmbol.INFO \*

| symbol     | type                 | address              |
|------------|----------------------|----------------------|
| ast        | (strtype1)           | D:400040F8--4000410B |
| aun        | (struct union1)      | D:40004420--40004437 |
| background |                      |                      |
| cstr1      | (unsigned char [17]) | D:40001380--400013C0 |
| def        | (struct abc)         | D:400040C0--400040C7 |
| enumvar    | (int)                | D:400040D0--400040D3 |
| flags      | (unsigned char [19]) | D:40004128--4000413A |
| func0      |                      |                      |
| func1      |                      |                      |

B:sYmbol.INFO flags



Symbols Dump List View MMU

variable \\diabc\Global\flags

type (unsigned char [19]) array (unsigned char, 19 bytes, indexed by int, 0..18)

(int) signed integer (32 bits)

(unsigned char) unsigned integer (8 bits)

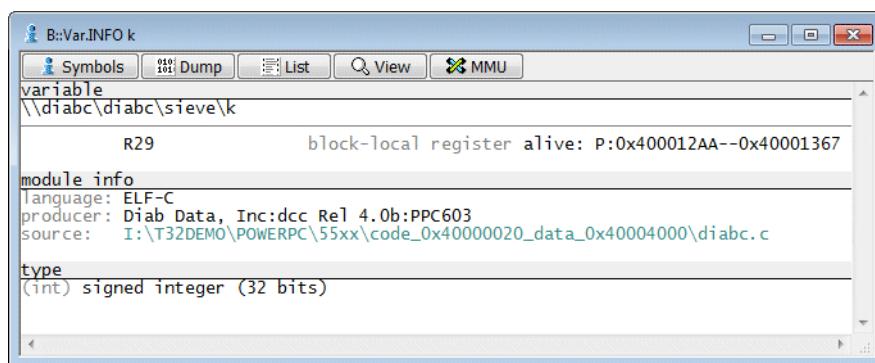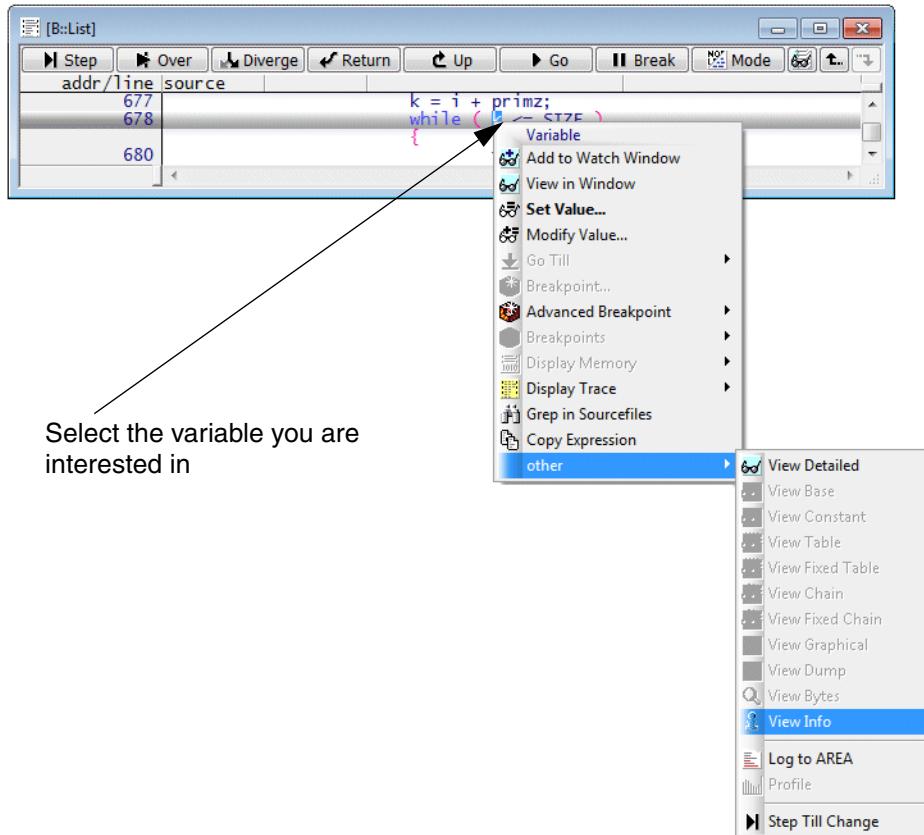

## sYmbol.INFO

Display symbolic address, location, scope and layout of a symbol


## Var.INFO

Display symbolic address, location, scope and layout of a variable or function


# Searching in Source Files

## Search a String in the Current Source File

If debug mode HLL is active, the entered string is searched in the current source file.

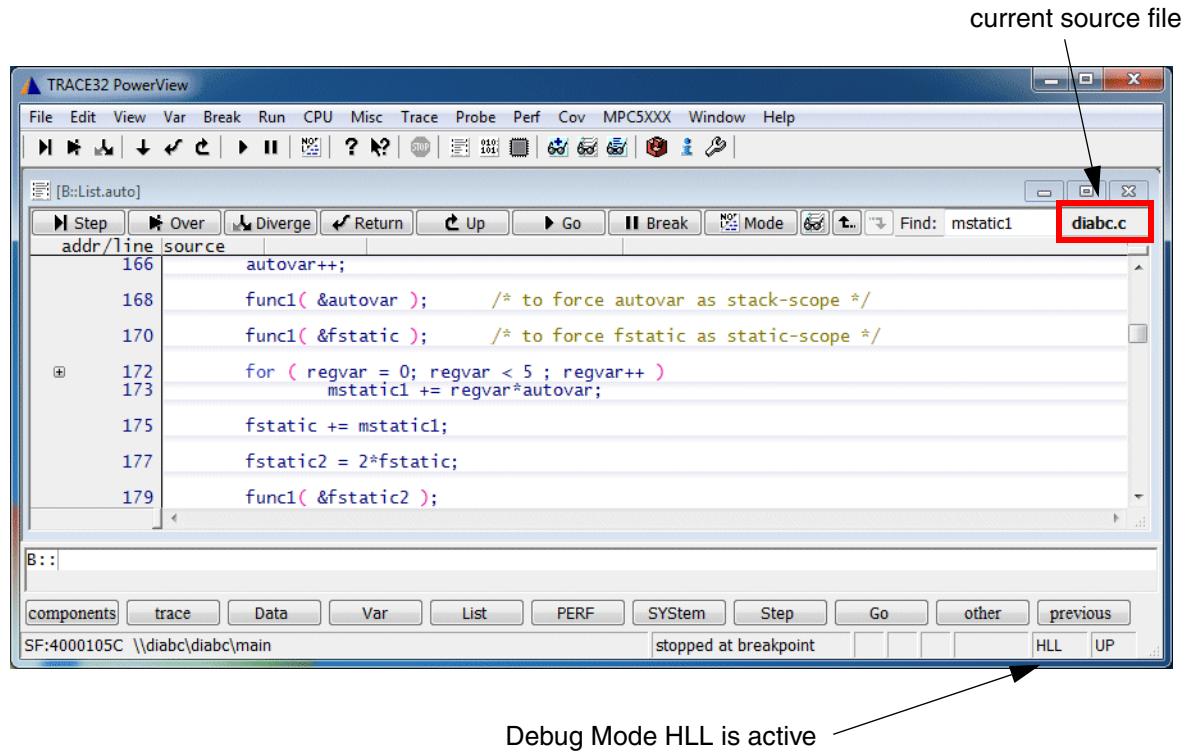

## Search a String in all Source Files

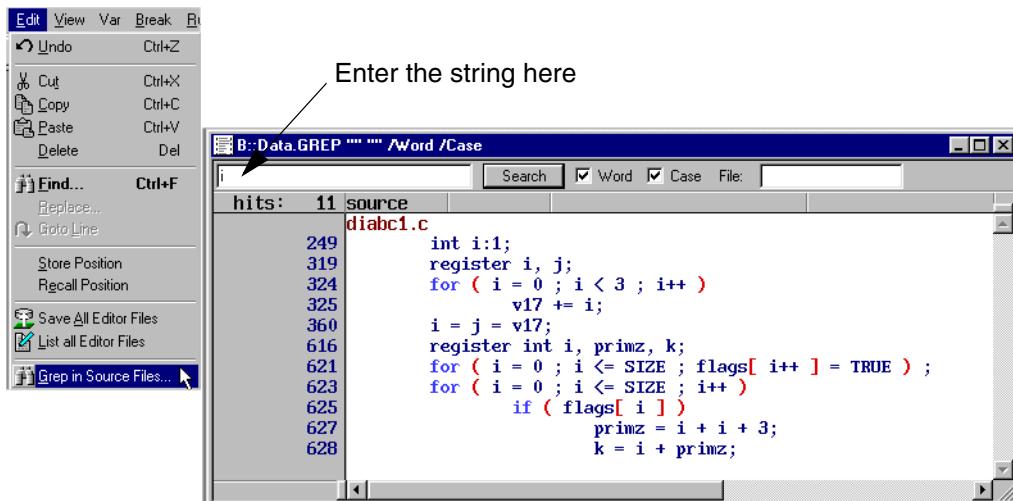



TRACE32 searches in all source files for the defined string.

# Display Variables

## Watch Window

Adds the selected variable to the top of the **Variable Watch** window. If no Watch Window exists, a new Watch Window is created.

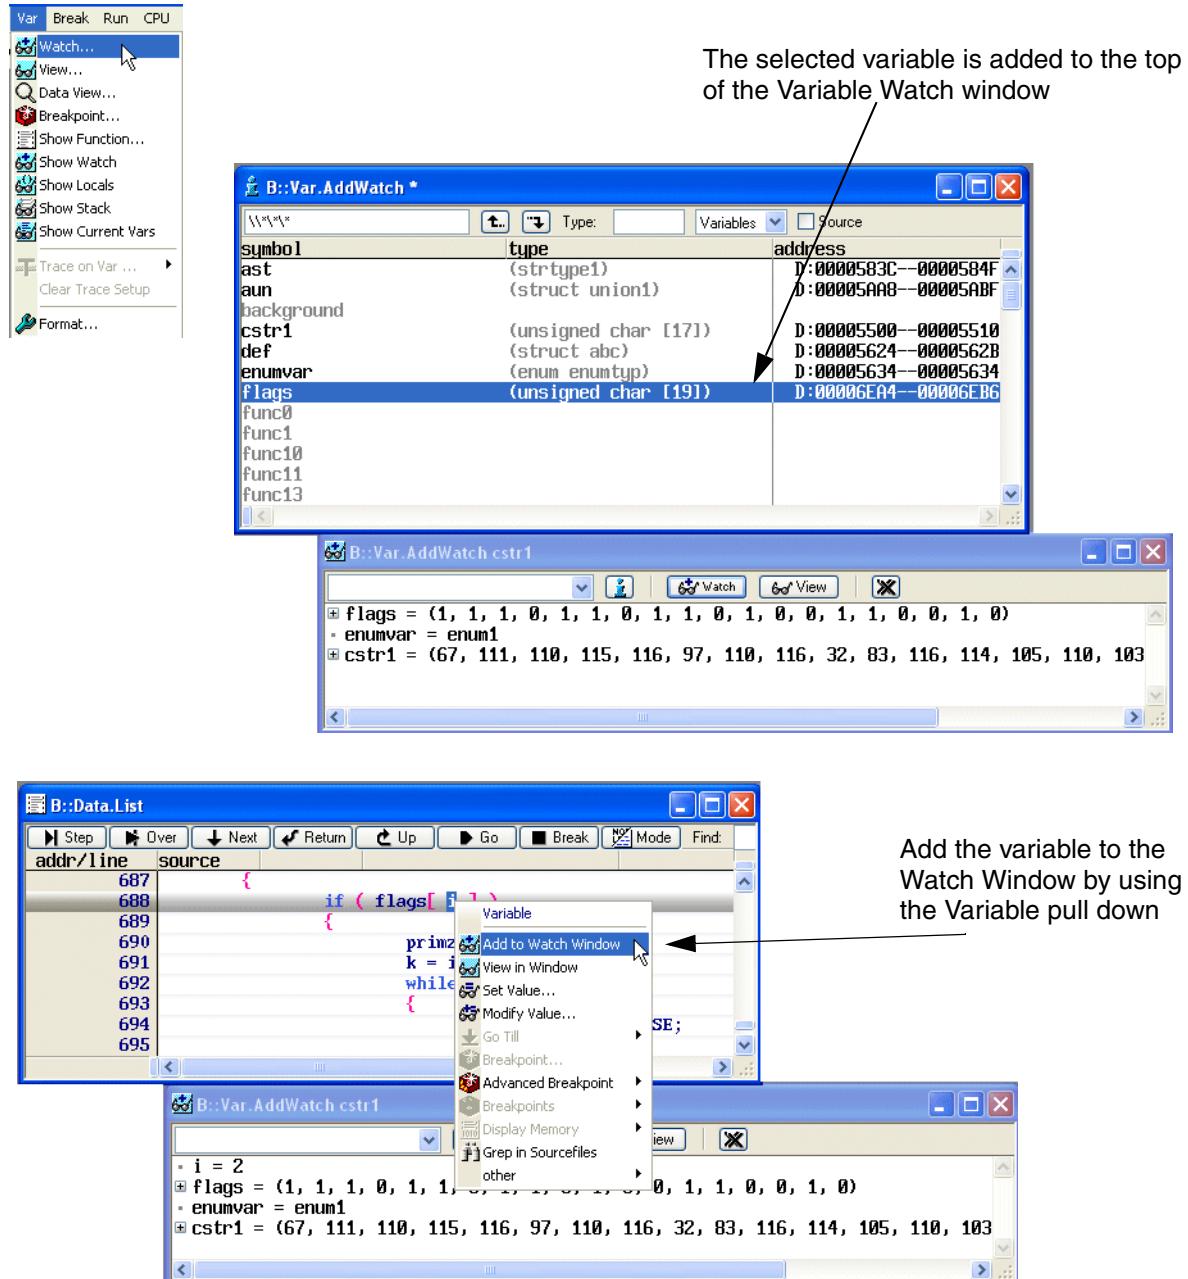

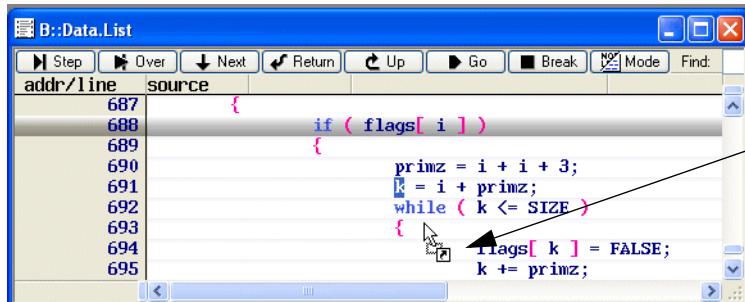

B::Data.List


addr/line source

```

687     {
688         if ( flags[ i ] )
689         {
690             primz = i + i + 3;
691             k = i + primz;
692             while ( k <= SIZE )
693             {
694                 if ( flags[ k ] = FALSE )
695                 k += primz;


```

Drag variable to the  
the Watch Window

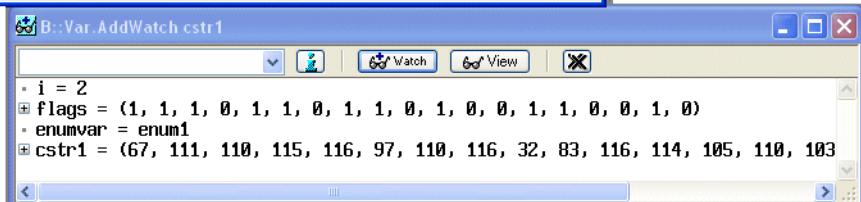

B::Var.AddWatch cstr1

- i = 2  
+ flags = (1, 1, 1, 0, 1, 1, 0, 1, 1, 0, 0, 1, 1, 0, 0, 1, 0)  
+ enumvar = enum1  
+ cstr1 = (67, 111, 110, 115, 116, 97, 110, 116, 32, 83, 116, 114, 105, 110, 103)

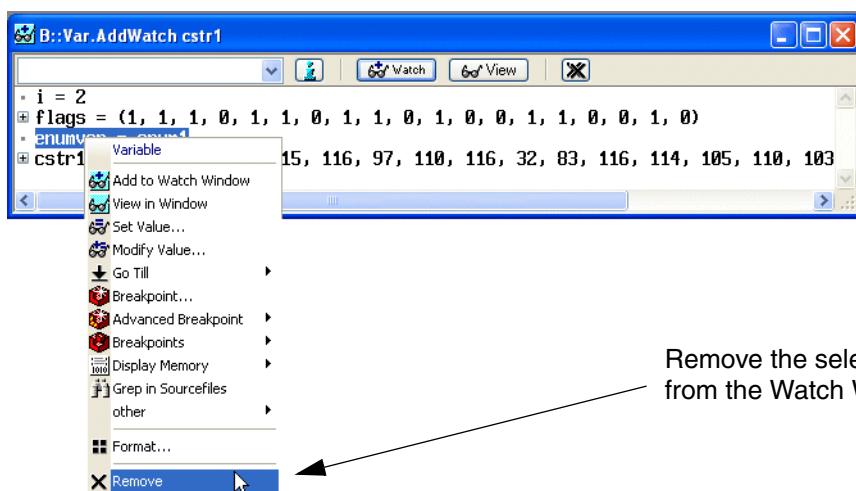

B::Var.AddWatch cstr1

- i = 2  
+ flags = (1, 1, 1, 0, 1, 1, 0, 1, 1, 0, 0, 1, 1, 0, 0, 1, 0)  
+ enumvar = enum1  
+ cstr1 = 15, 116, 97, 110, 116, 32, 83, 116, 114, 105, 110, 103

Variable

- Add to Watch Window
- View in Window
- Set Value...
- Modify Value...
- Go Till
- Breakpoint...
- Advanced Breakpoint
- Breakpoints
- Display Memory
- Grep in Sourcefiles
- other
- Format...
- Remove

Remove the selected variable  
from the Watch Window

**Var.Watch** [%<format>] [<variable>]


Open a watch window and display variable

**Var.AddWatch** [%<format>] <variable>

Add variable to watch window

# View Window

Opens a new **Variable View** window for the selected variable.

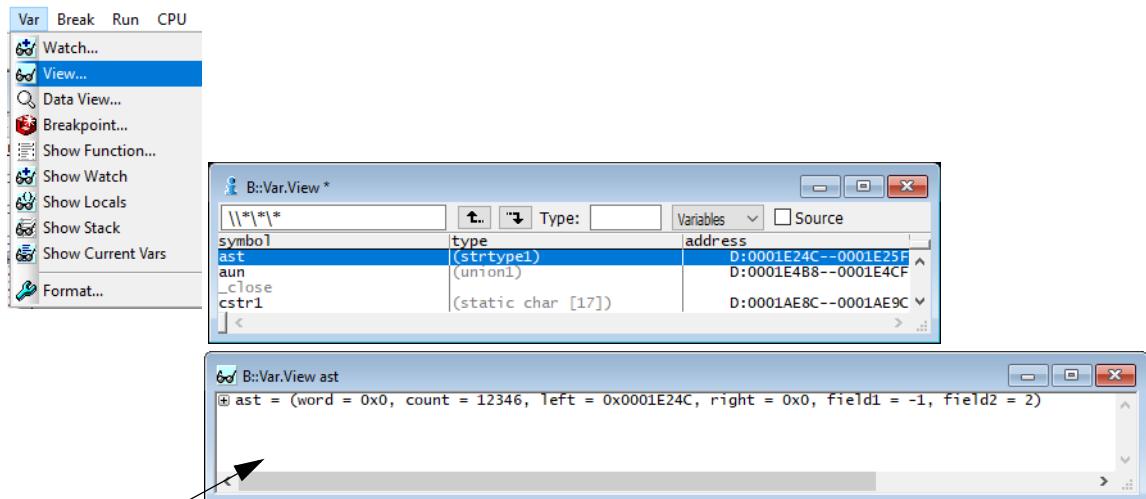


A new **Variable View** Window is opened to display the selected variable

## Var.View [%<format>] <variable>


Display variable in a separate window

- If a formula is entered, it is interpreted and the result is displayed.

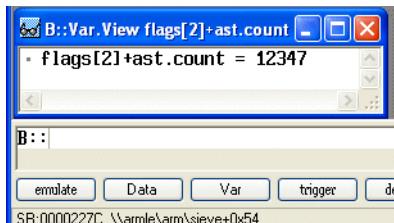

# Referenced Variables

Opens a **Var.REF** window. The variables referenced by the current source line are automatically added to this window.

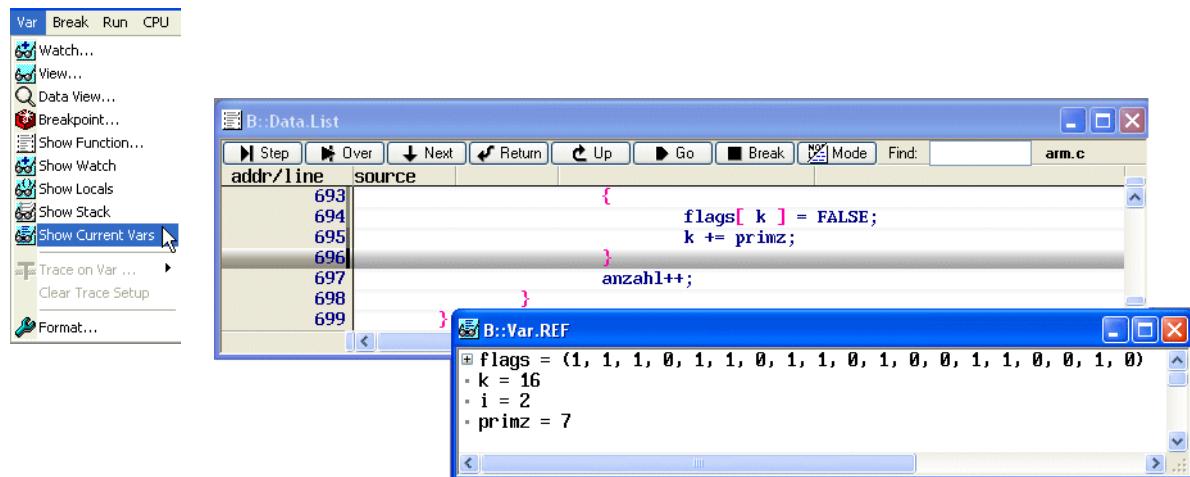


**Var.Ref** [%<format>]

Display the variables referenced by the current code line


# Local Variables

Open a window to display the local variables of the current function.

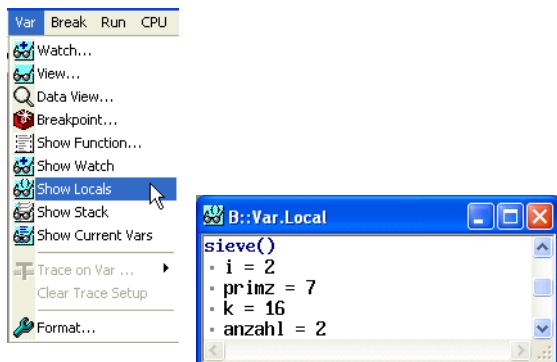


**Var.Local** [%<format>]

Display local variables

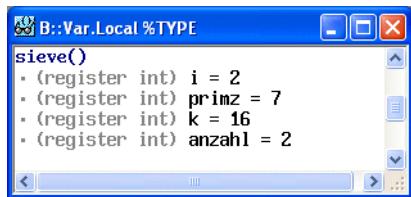

# Stack Frame

Display a “stack trace” to show the functions’ nesting.

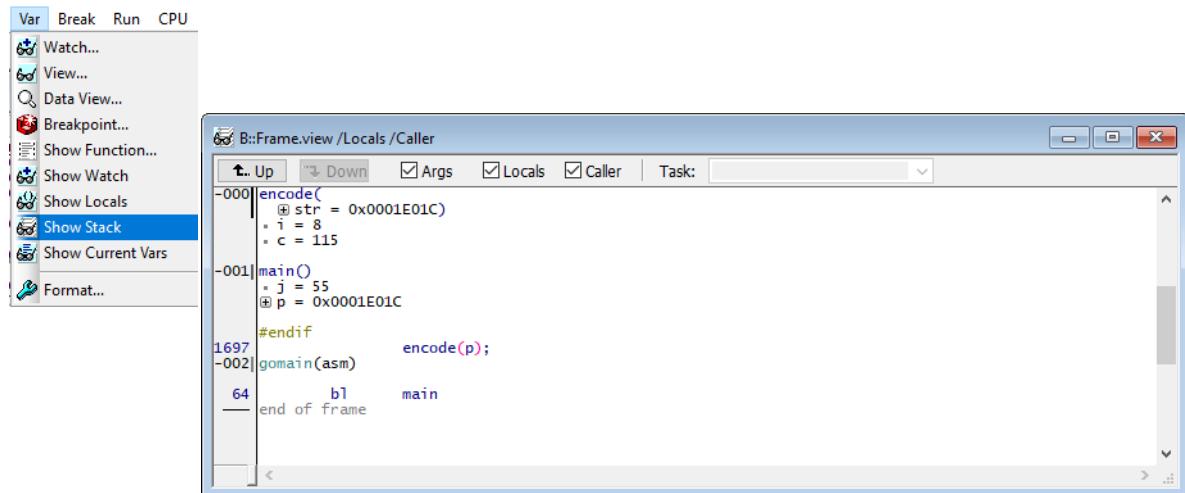

|               |                                                                              |
|---------------|------------------------------------------------------------------------------|
| <b>Args</b>   | Display the arguments.                                                       |
| <b>Local</b>  | Display the local variables.                                                 |
| <b>Caller</b> | Display of the high level language block from which the function was called. |

**Frame.view** [%<format>] [/option]

Display a ‘stack trace’


# Special Display for Arrays

## Graphical Display

**Var.DRAW** [%<format>] <array>

Display the contents of an array graphically

```
Var.DRAW sinewave
```

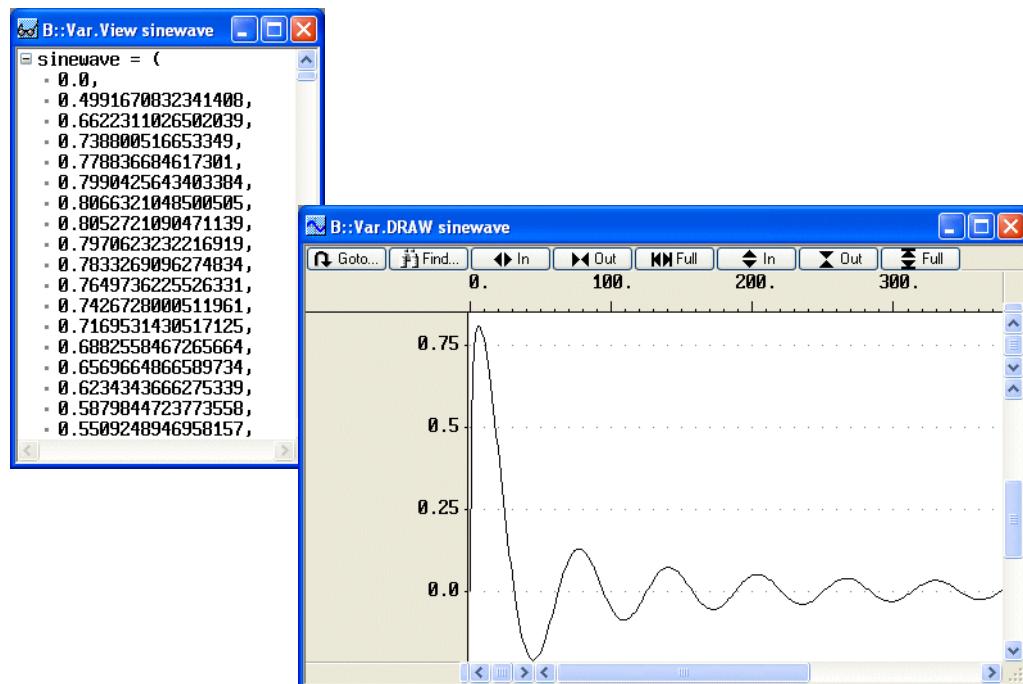



# Display Array with Indices and Pointers


**Var.TABle** [%<format>] <array> <index> [ ... ]

Display an array together with indices and pointers

Var.TABle flags i k vpchar

i and k are indices,  
vpchar is a pointer

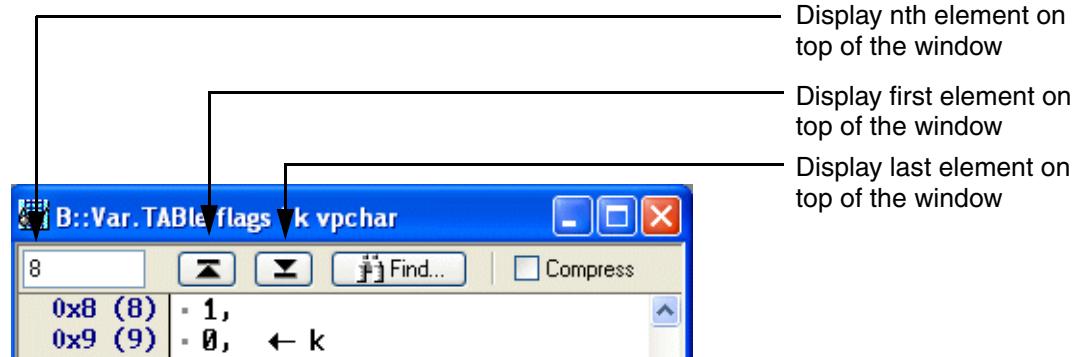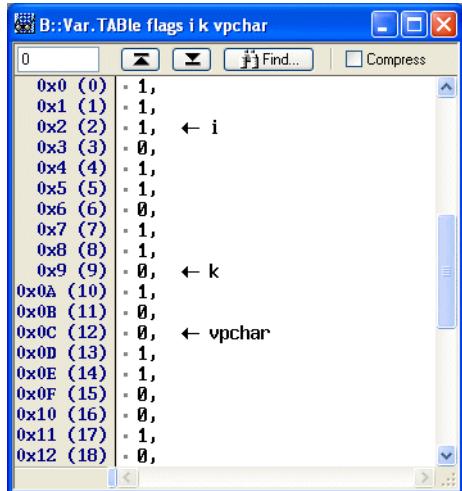

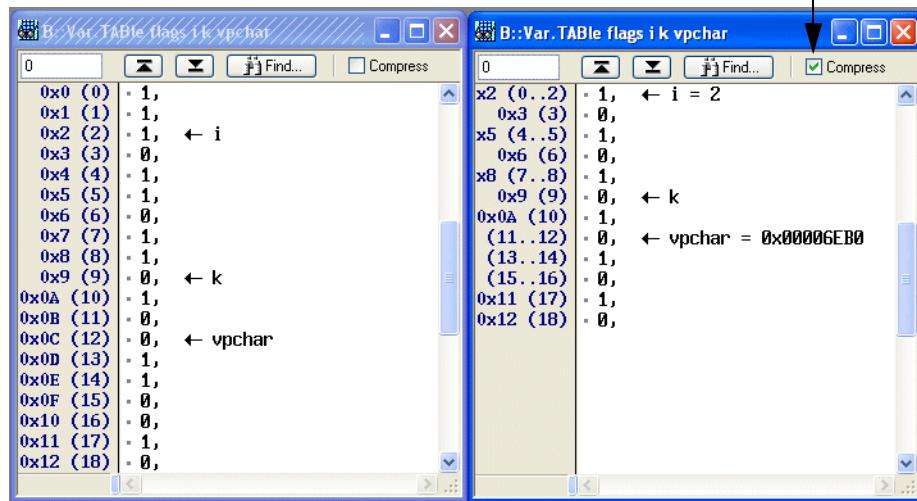

B::Var.TABLE (flags) k vpchar


B::Var.TABLE flags i k vpchar

Compress the array

**Var.FixedTABLE** [%<format>] <array> <index> [ ... ]

Display an array together with indices and pointers in a fixed format

Var.FixedTABLE stra2 vpchar

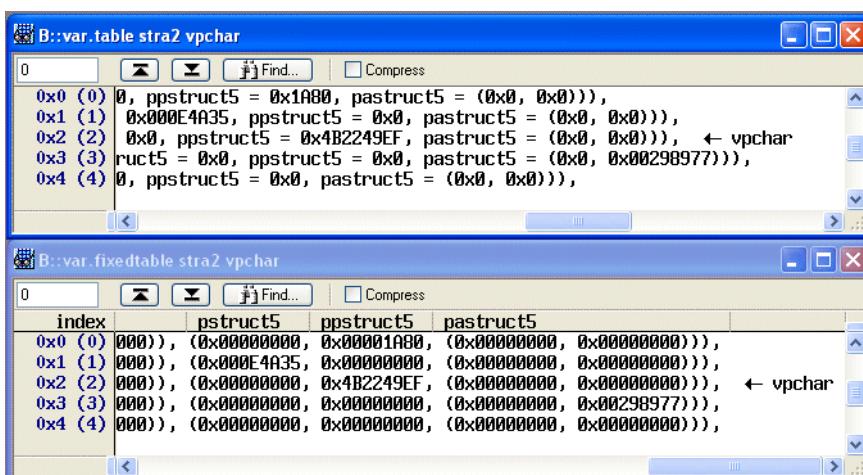

B::var.table stra2 vpchar

B::var.fixedtable stra2 vpchar


Compress

Var.CHAIN [%<format>] <first> <next> [ ... ]

Display a linked list

Var.CHAIN ast ast.left


ast is the first element of the linked list,  
ast.left provides the pointer to the next element

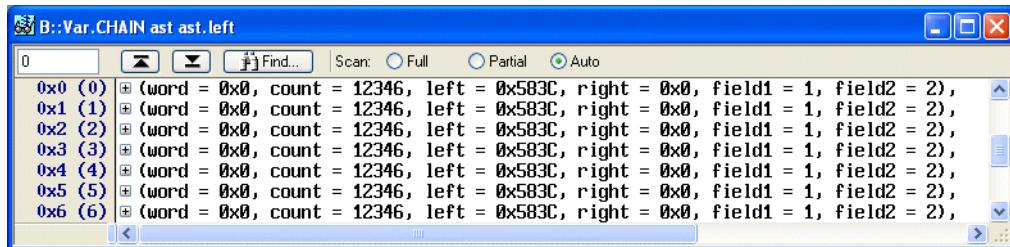

Display the nth element on top of the window

Display the first element on top of the window

Display the last element on top of the window



|                   |                                                                                                                                                                                                                                                                                   |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Scan Modes</b> | The linked list is permanently scanned to keep it up to date. This may reduce the performance of the TRACE32 user interface. 3 different scan modes are supported                                                                                                                 |
| Full              | The linked list is scanned completely. This may reduce the performance of the TRACE32 user interface considerably.                                                                                                                                                                |
| Partial           | The linked list is only scanned from the record at the top of the screen. The influence on the performance of the TRACE32 user interface is very small.                                                                                                                           |
| Auto              | This mode provides a compromise between an up to date linked list and a fast TRACE32 user interface. For a specific time (20-50 ms) the list is updated and for the same time user inputs are served. The number beside the Auto button is the number of the last updated record. |

**Var.FixedCHAIN [%<format>] <first> <next> [ ... ]**


Display a linked list in a fixed format

Var.FixedCHAIN ast ast.left

| B::Var.FixedCHAIN ast ast.left |              |                                |      |       |        |        |  |
|--------------------------------|--------------|--------------------------------|------|-------|--------|--------|--|
| index                          | word         | count                          | left | right | field1 | field2 |  |
| 0x0 (0)                        | (0x00000000, | 12346, 0x0000583C, 0x00000000, |      |       | 1,     | 2),    |  |
| 0x1 (1)                        | (0x00000000, | 12346, 0x0000583C, 0x00000000, |      |       | 1,     | 2),    |  |
| 0x2 (2)                        | (0x00000000, | 12346, 0x0000583C, 0x00000000, |      |       | 1,     | 2),    |  |
| 0x3 (3)                        | (0x00000000, | 12346, 0x0000583C, 0x00000000, |      |       | 1,     | 2),    |  |
| 0x4 (4)                        | (0x00000000, | 12346, 0x0000583C, 0x00000000, |      |       | 1,     | 2),    |  |

# Change a Variable Value

To change the content of a variable, you can use the **Set Value...** command from the variable pull-down or simply double-click on the variable. In either case, the command **Var.set** appears in the command line together with the name of the variable.

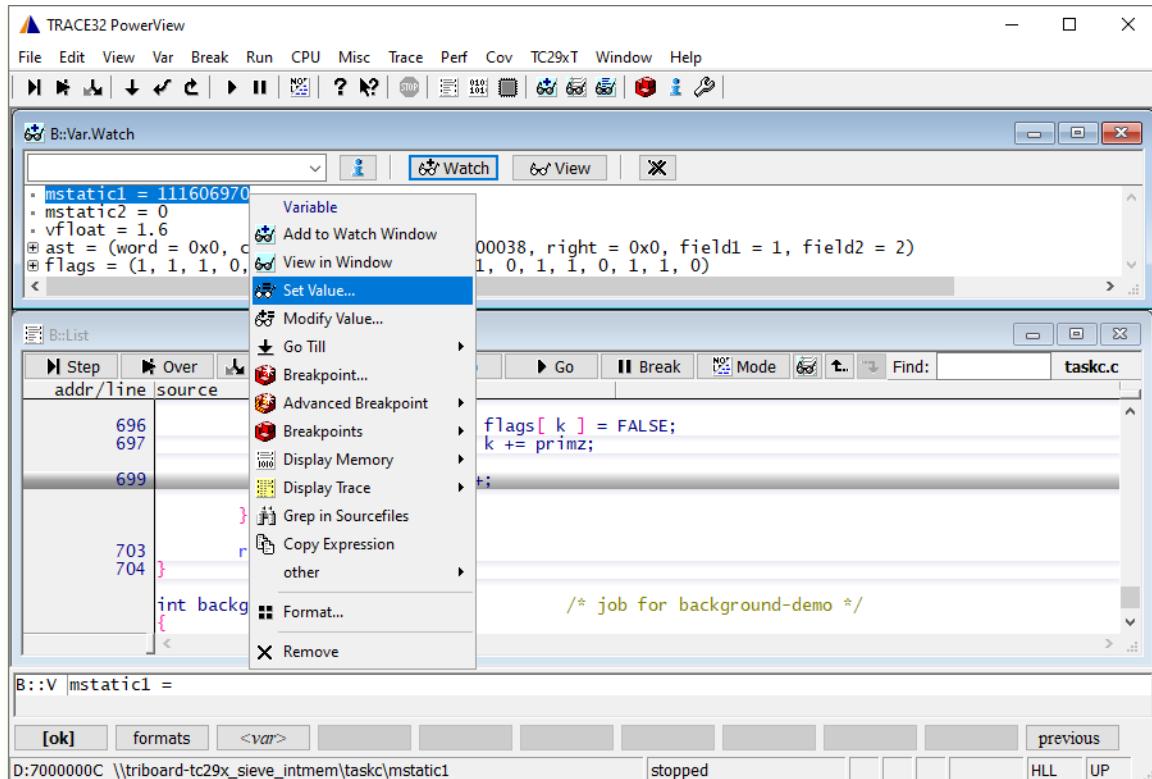

Here are a few examples for the use of the **Var.set** command:

```
Var.set mstatic1 = 111609970 ; assign a decimal value to the
                             ; variable mstatic1


Var.set mstatic1 = k+3      ; add 3 to the content of the
                           ; variable k and assign the result
                           ; to the variable mstatic1

Var.set mstatic1 = k+i      ; add the contents of the variables
                           ; k and i and assign the result
                           ; to the variable mstatic1

Var.set flags[3] = 1        ; assign decimal value 1 to the 4th
                           ; element of the array flags

Var.set ++k                 ; increment the content of the
                           ; variable k
```

The command **Var.set** can also be used to evaluate a high-level language expression. The expression and its result are then displayed in the message area.

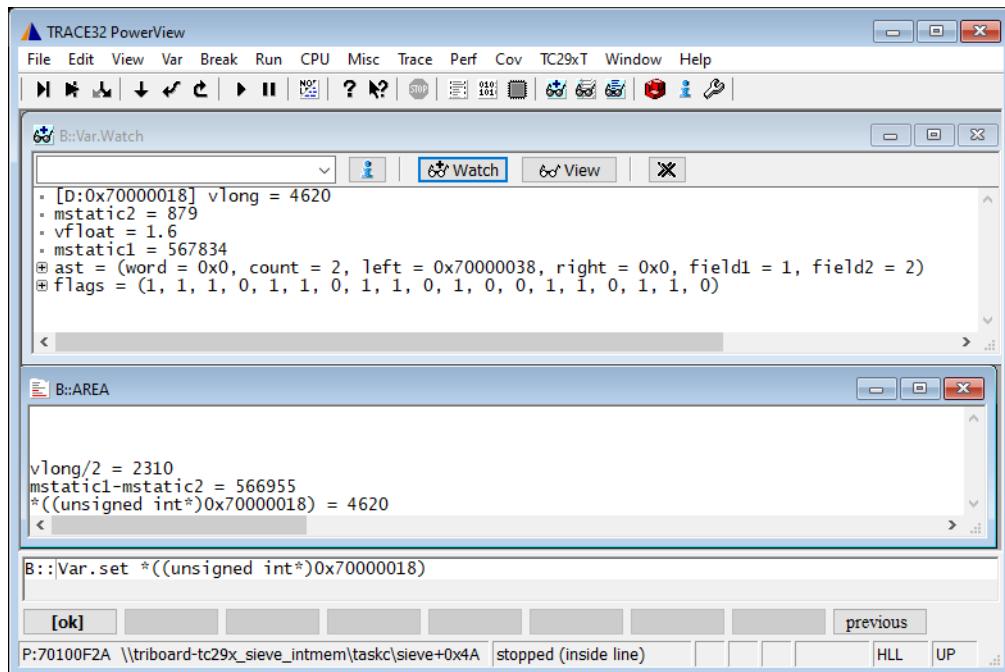

At this point it should be pointed out again that the **Var** command group uses as parameter syntax the syntax of the used high-level language (usually C/C++). While all other TRACE32 commands must use the TRACE32 parameter syntax, which is based on C but has some special features and handles debug symbols more like a compiler's linker does. The following table illustrates this:

|                                        | <b>High-level expression</b>          | <b>TRACE32 expression</b> |
|----------------------------------------|---------------------------------------|---------------------------|
| Value of C/C++ Variable myvar          | myvar                                 | Var.VALUE(myvar)          |
| Address of C/C++ Variable myvar        | &myvar                                | myvar                     |
| Size of C/C++ Variable myvar           | sizeof(myvar)                         | Var.SIZEOF(myvar)         |
| Value of 32-bit word at address 0x2000 | <code>*((unsigned int*)0x2000)</code> | Data.Long(D:0x2000)       |
| Decimal constant                       | 42                                    | 42.                       |
| 5th element of array myarray           | myarray[5]                            | Var.VALUE(myarray[5])     |
| Data of element val in struct mystruct | mystruct.val                          | Var.VALUE(mystruct.val)   |

|                                 |                          |                         |
|---------------------------------|--------------------------|-------------------------|
| Value of core register R7       | \Register(R7)            | Register(R7)            |
| String containing host OS       | \VERSION_ENVIRONMENT(OS) | VERSION.ENVIRONMENT(OS) |
| Value on APB bus address 0x4000 | \Data_Long((APB:0x4000)) | Data.Long(APB:0x4000)   |

Here are some examples:

```
Var.set mstatic2 = mstatic1
Data.Set mstatic2 %Long Var.VALUE(mstatic1)
```

```
Var.set mstatic2=*((unsigned int*)0x7000004C)
Data.Set mstatic2 %Long Data.Long(D:0x7000004C)
```

```
Var.set mstatic2=\Register(D8)
Data.Set mstatic2 %Long Register(D8)
```


```
Var.Set mstatic2++
Data.Set mstatic2 %Long Var.VALUE(mstatic2)+1
```

```
; result as a decimal number
Var.PRINT \Data_Long((D:0x7000000C))


; result as a hex number
PRINT Data.Long(D:0x7000000C)
```

# Format Variable

## Format a Variable using the Format Dialog Box

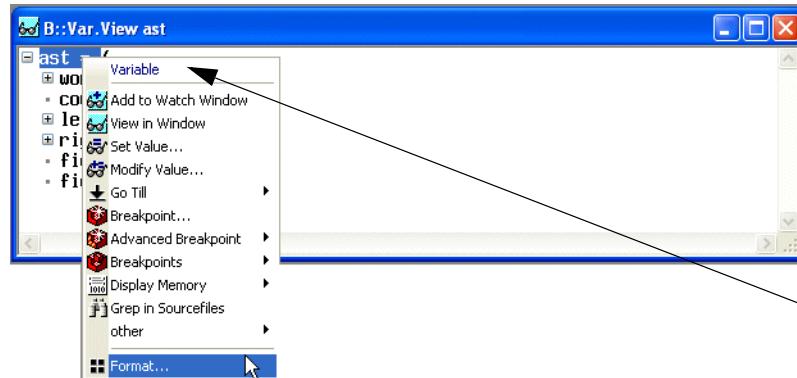

Select the variable and press the right mouse button to open the **Change Variable Format** dialog box

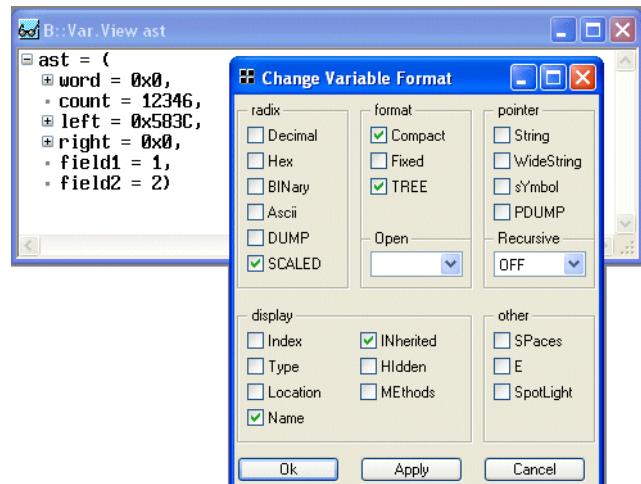


- Numeric formats


By default integers are displayed in decimal format and pointers in hex format.

| Radix   |                                                       |
|---------|-------------------------------------------------------|
| Decimal | All numeric values are displayed in decimal format.   |
| Hex     | All numeric values are displayed in hex format.       |
| BINary  | All numeric values are displayed in binary format.    |
| Ascii   | All numeric values are displayed as ASCII characters. |

Select the radix, more than one possible

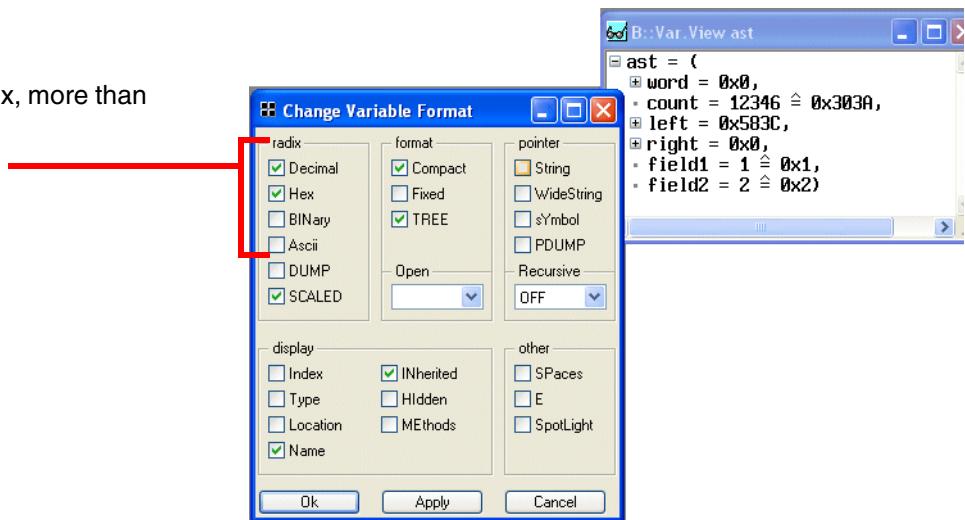


Click to the small dot on the left side of the variable to display a numeric value in different formats

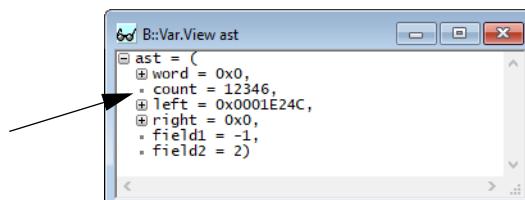

- **Dump**

Display the contents of the variable additionally as a hex dump.

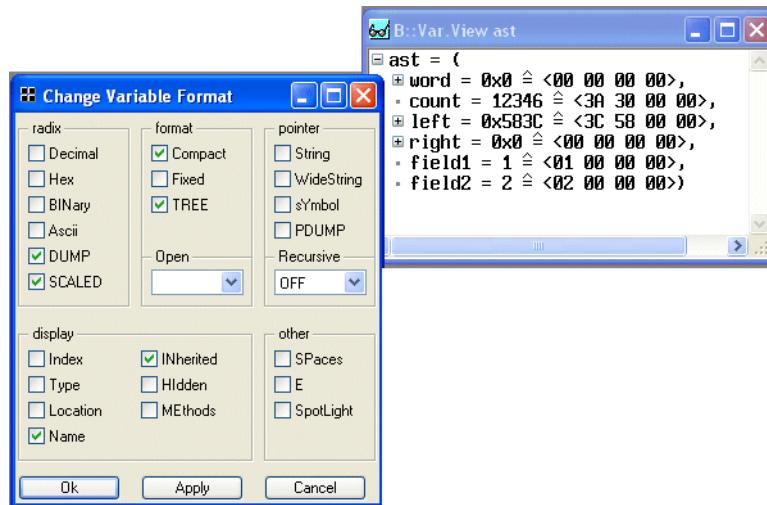

- **Scaled**

Display the variable in the defined scaling

**sYmbol.AddInfo.Var <var> Scaled <multiplier> <offset> <format>**

Define a scaling for a variable

**sYmbol.AddInfo.List**


List all defined scalings

**sYmbol.AddInfo.RESet**

Reset list


```
sYmbol.AddInfo.Var vffloat Scaled 1.3 4 " mVolt"
```

```
sYmbol.AddInfo.List
```

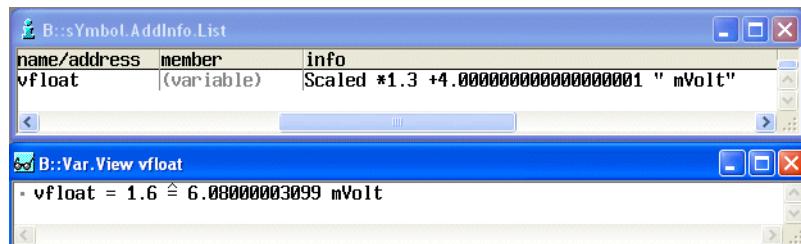


- **Index**

Display array with indices

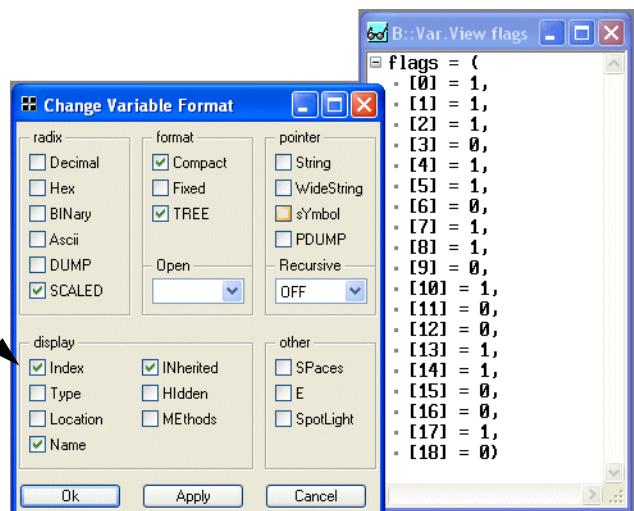


- **Type**

Display variable with type information

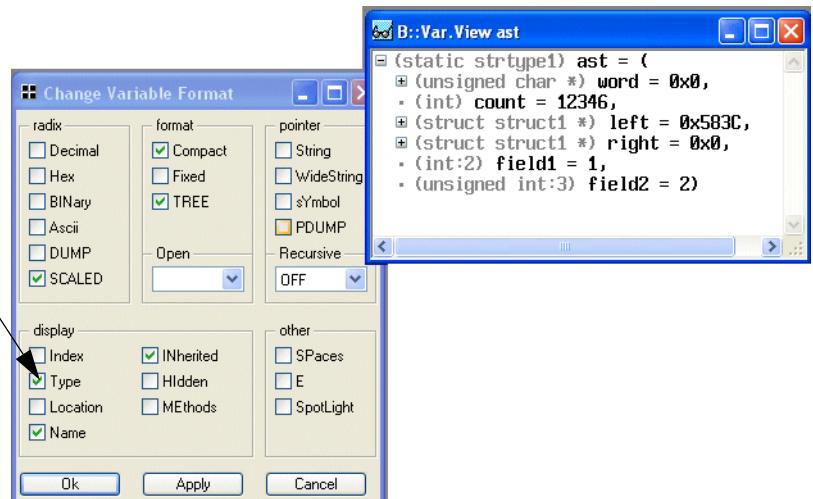

- **Location**


Display variable with location information

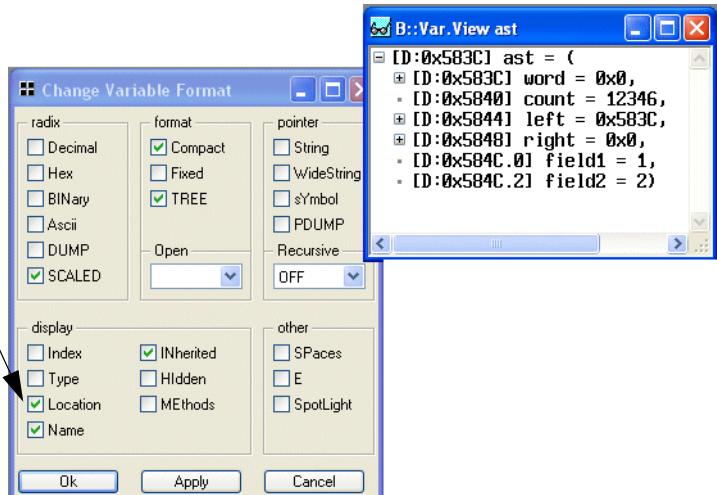


# format

- **Fixed**


Display all numeric values in a fixed format.

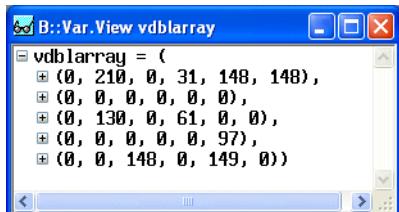


Use fixed space between the numeric elements of an array

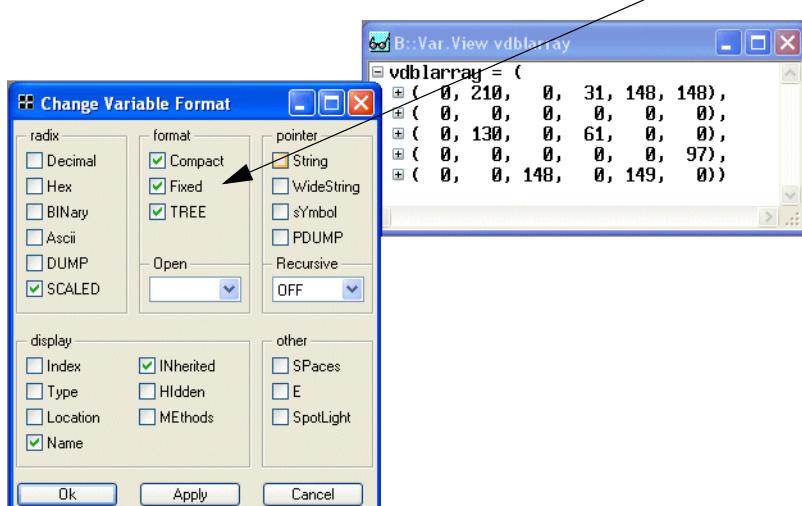

- **Tree**

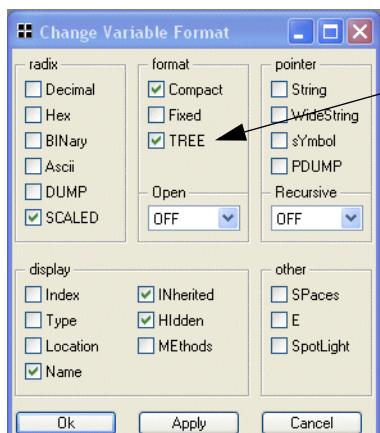


Display a structure in a tree display

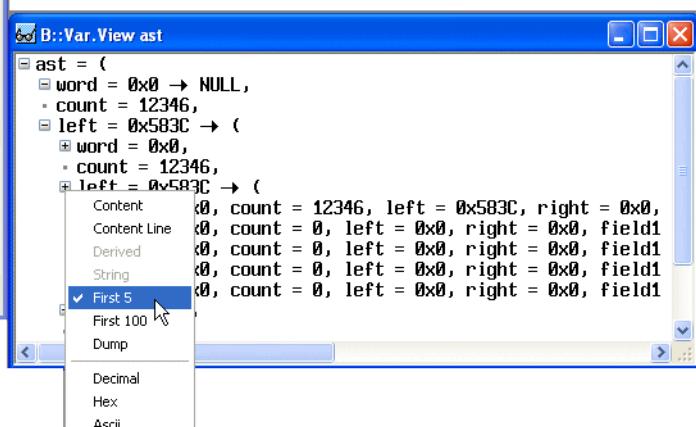


- **String/WideString**

This format can be used for arrays or pointer to characters.

|                   |                                                         |
|-------------------|---------------------------------------------------------|
| <b>String</b>     | Each character is a byte.                               |
| <b>WideString</b> | Each character is a word e.g. for some DSPs or unicode. |



Display the array as a string

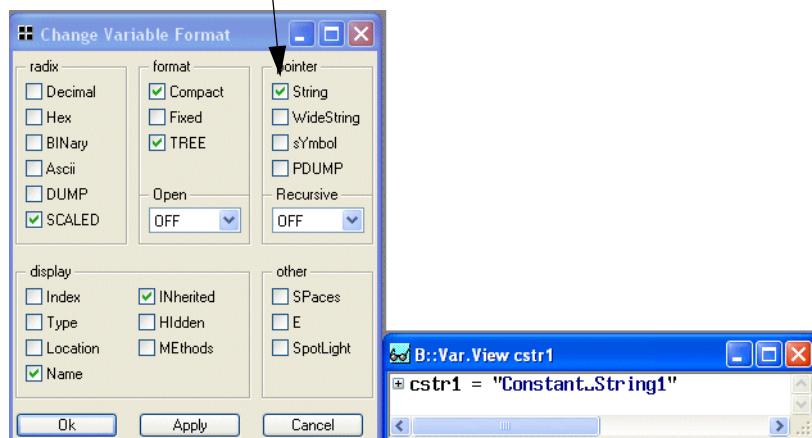

**sYmbol.AddInfo.Var <var> ZSTRING**

Define variable contents as a zero-terminated string

**sYmbol.AddInfo.List**

List all definitions

**sYmbol.AddInfo.RESet**

Reset list

sYmbol.AddInfo.Var cstr1 ZSTRING

The contents of cstr1 is a zero-terminated string


sYmbol.AddInfo.List

Display definition list

The image shows a screenshot of a debugger interface with two windows:


- B:sYmbol.AddInfo.List**: This window displays a table with three columns: **name/address**, **member**, and **info**. One row is visible, showing **cstr1** as the name/address, **(variable)** as the member, and **ZSTRING** as the info.
- B:Var.View cstr1**: This window shows the value of the variable **cstr1**, which is set to **+ cstr1 = "Constant.String1"**.

- **sYmbol**

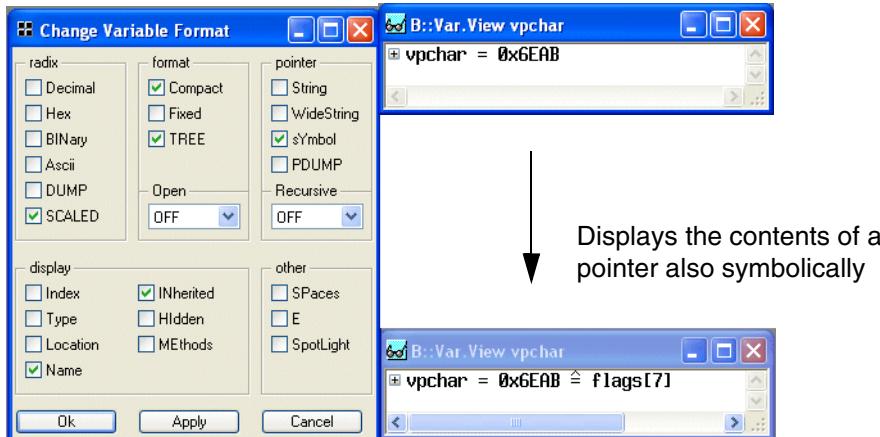


- **PDUMP**

Display a 16 byte hex dump starting at the address where the pointer is pointing to.

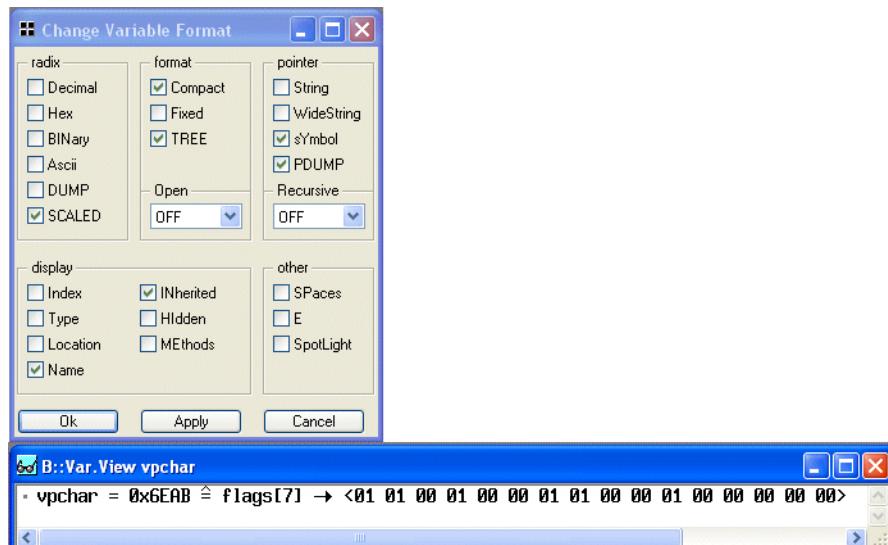

- **SpotLight**

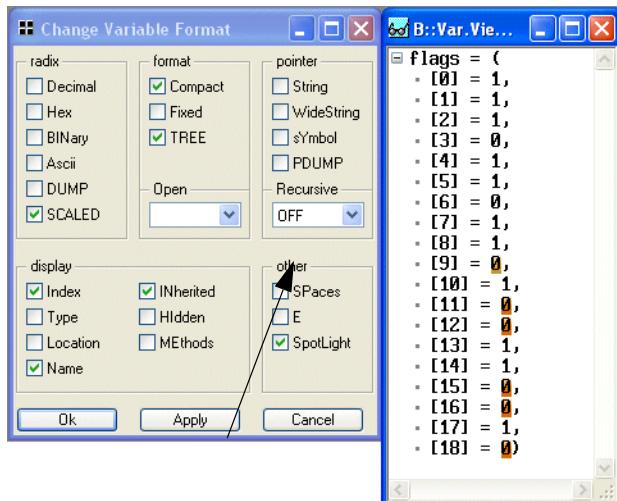

Highlight all changed variable elements:

The variable elements changed by the last step are marked in dark red. The variable elements changed by the step before the last step are marked a little bit lighter. This works up to a level of 4.

## Format a Variable Using the Command Line



If a variable is formatted using the **Change Variable Format** dialog box, the format information will not be stored when the windows configuration is saved in a PRACTICE file.


The format information will be stored only, if the variable was formatted using the command line.

**Var.View [%<format>] <variable>**


- Format definitions are valid for all variables used in the command after the format definition.



- Format definitions can be switched off selectively.

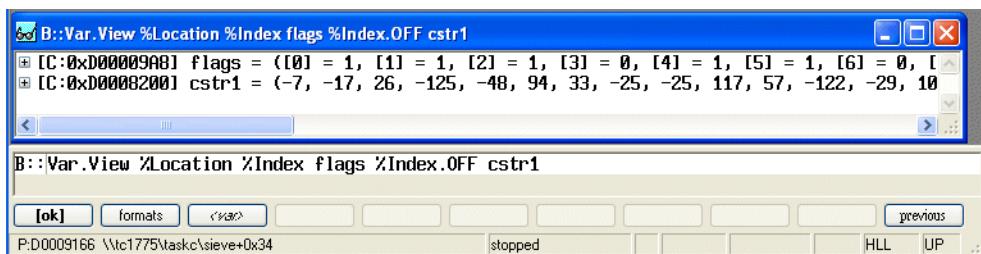

# General SETUPS

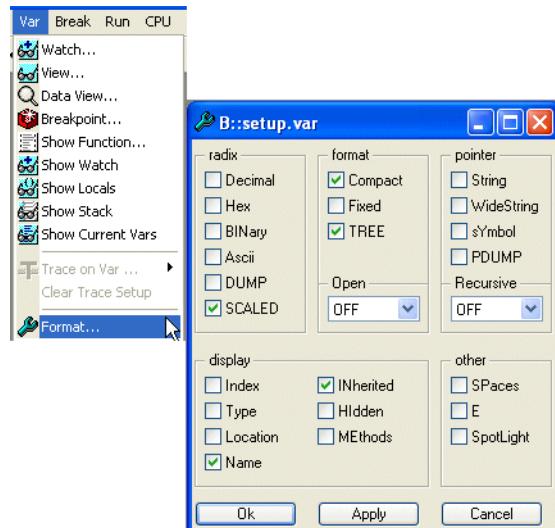


**SETUP.Var** [%<format>...]

Change default display format for variables

## Basics

TRACE32 provides the possibility to monitor variable changes while the program execution is running. Monitoring the variable changes is only possible for variables with a fixed address.

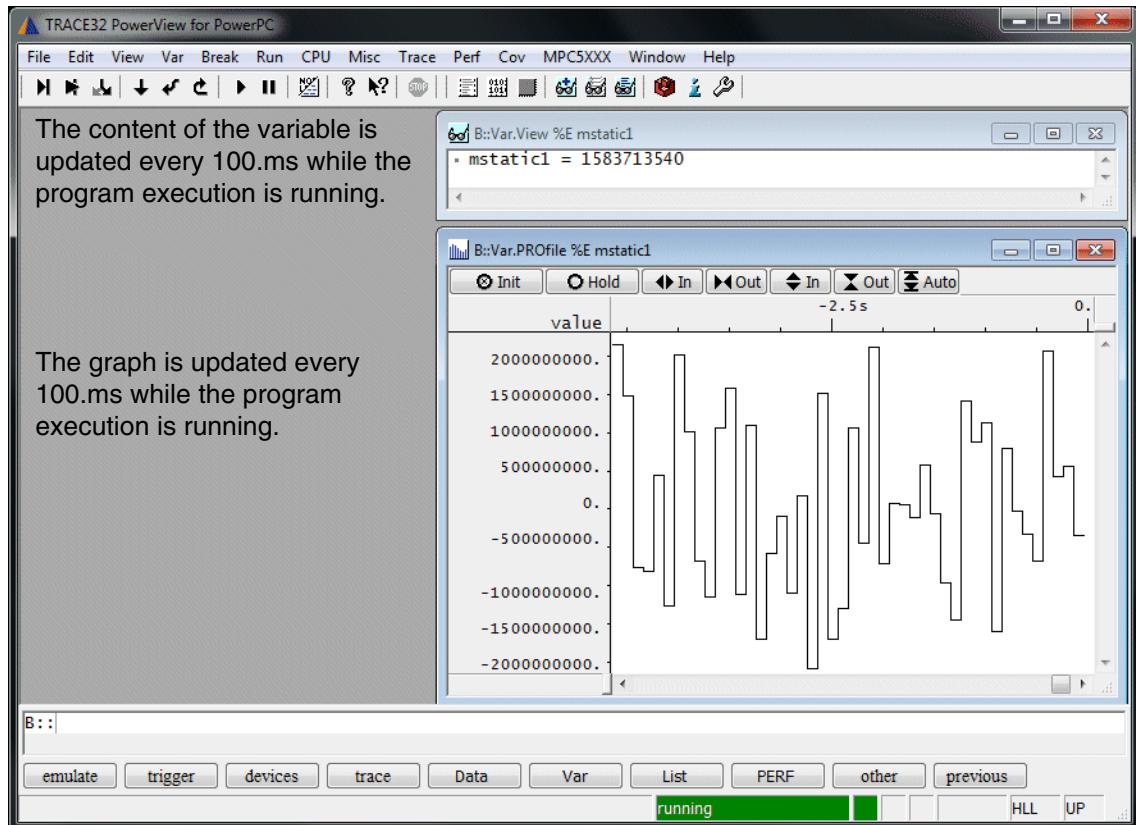


**Run-time memory access:** If the processor architecture in use allows the debugger to read the target's physical memory while the program execution is running, variables can be monitored without any impact on the program execution. For details, refer to "["Run-time Memory Access"](#)" in TRACE32 Glossary, page 42 (glossary.pdf).


**StopAndGo mode:** If the processor architecture allows the debugger to read the target's memory only when the program is stopped or if other restrictions don't allow the debugger to read the variable while the program execution is running, the debugger can be configured to stop the program execution every 100 ms in order to read the variable content. For details, refer to "["StopAndGo Mode"](#)" in TRACE32 Glossary, page 52 (glossary.pdf).

# Preparation

No preparation is required if run-time memory access (**SYStem.MemAccess**) is enabled by default.

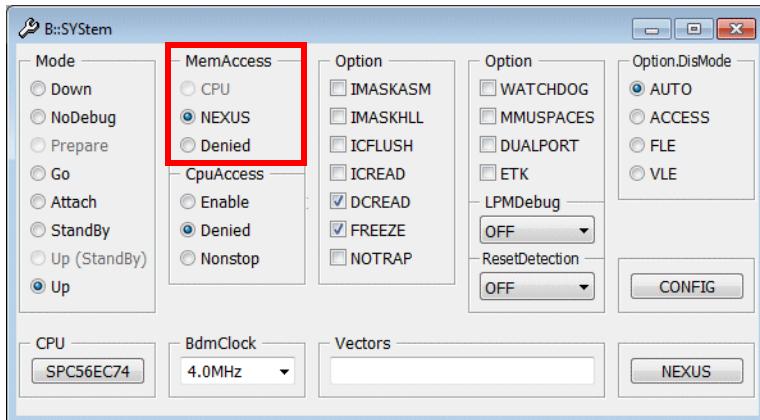


If run-time memory access is **denied** (**SYStem.MemAccess Denied**) by default, please refer to your **Processor Architecture Manual** before you enable it by selecting one of the radio buttons.

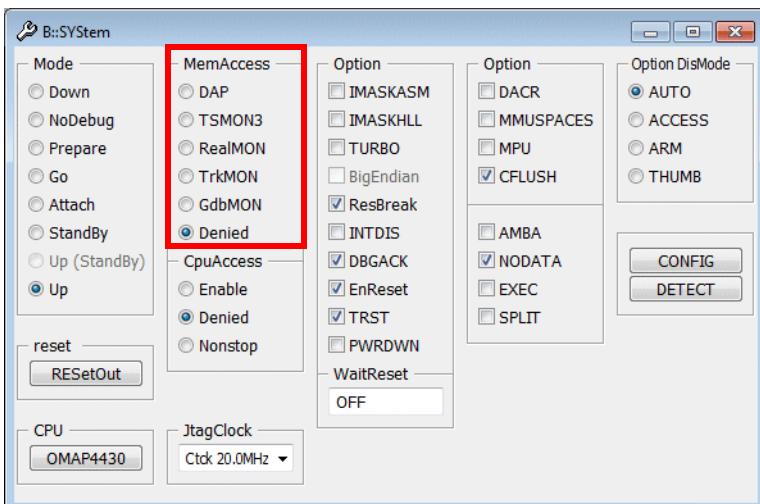

## **SYStem.MemAccess DAP**

Enable run-time memory access via Debug Access Port (ARM/Cortex architecture)

If run-time memory access is not supported by the processor architecture in use or if other restriction don't allow the debugger to read the variable while the program execution is running, you can configure the debugger for StopAndGo mode.

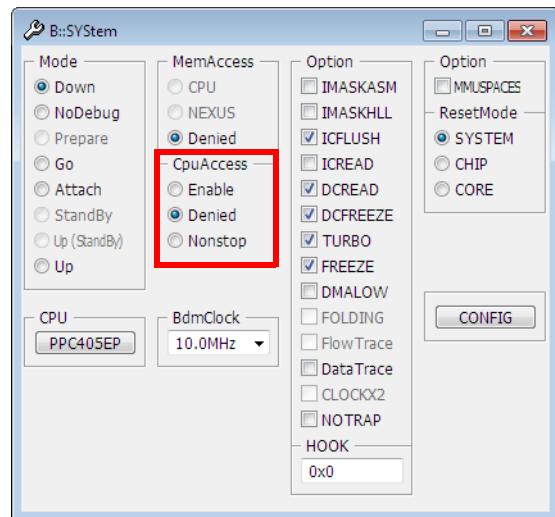

### SYSystem.CpuAccess Enable

Allow StopAndGo mode to read variables.




**SYSystem.CpuAccess Enable** is not recommended for complex multicore chips that use caches and MMU.

## Format Option %E


The option %E can be used for most commands that display variables. It advises the debugger to update the display for all variables with a fixed address 10 times per second.

```
Var.View %E fstatic2 vbfield vdouble
```

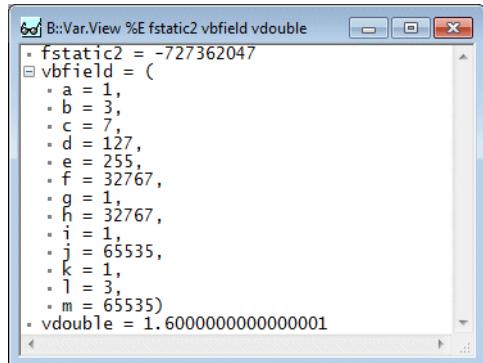


```
Var.DRAW inputA ; Displays the contents of an HLL  
; array graphically
```

```
Var.DRAW inputA inputB mixed
```

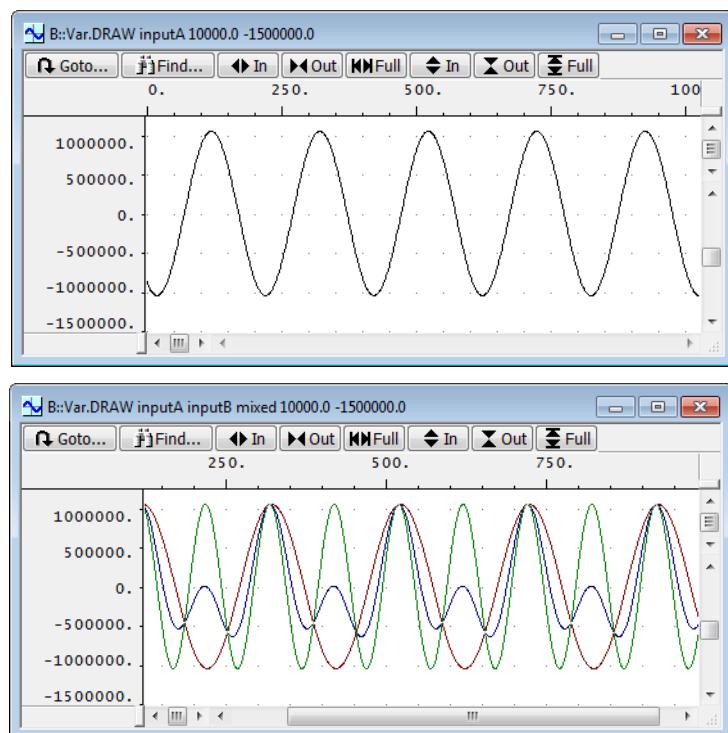

Processor architectures used in the automotive industry provide the option **DUALPORT** in the **System** window. If DUALPORT is checked run-time memory access is automatically enabled for all windows that display memory (e.g. source listing, memory dumps, variable displays, displays of SFR). The format option %E can be omitted in this case.

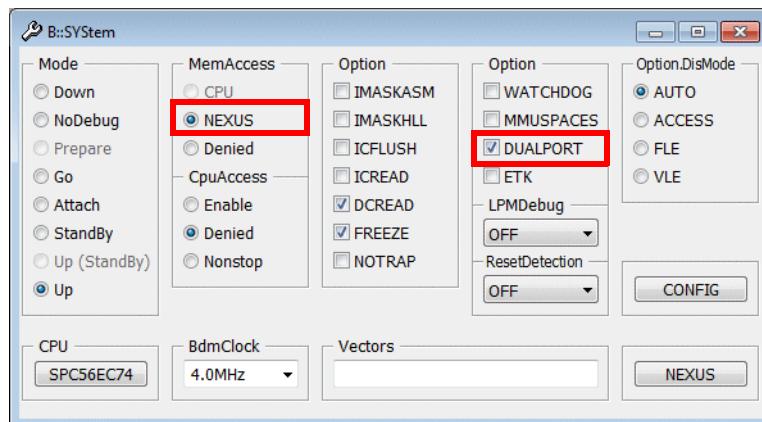


**SYStem.Option.DUALPORT ON**


# Var.PROfile Command

The command **Var.Profile** allows to monitor numeric variables and display their changes graphically.


```
Var.PROfile %E fstatic2
```

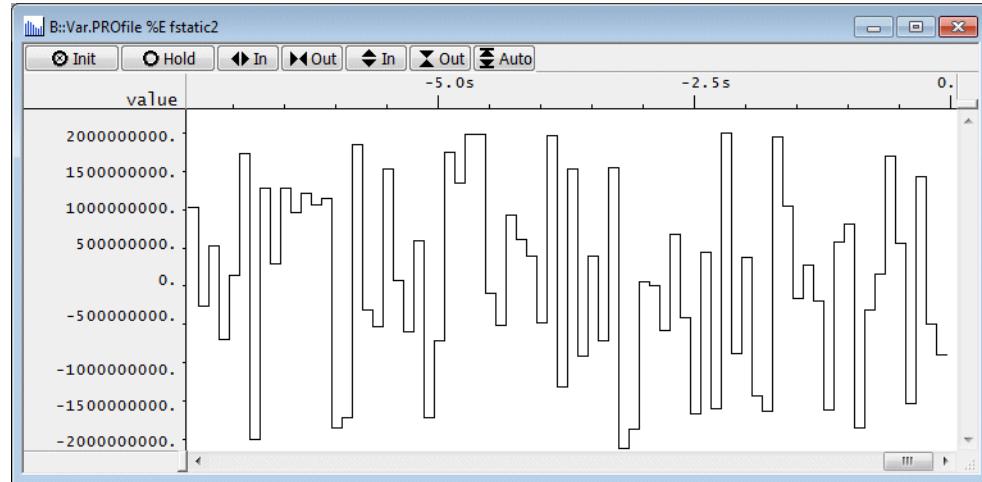

```
Var.PROfile %E vdouble
```

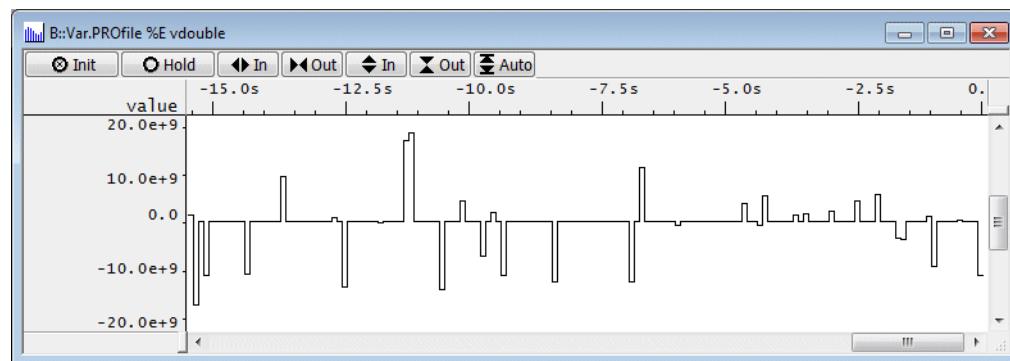

Up to three variable can be superimposed if required. The following color assignment is used: first variable value red, second variable value green, third variable value blue.

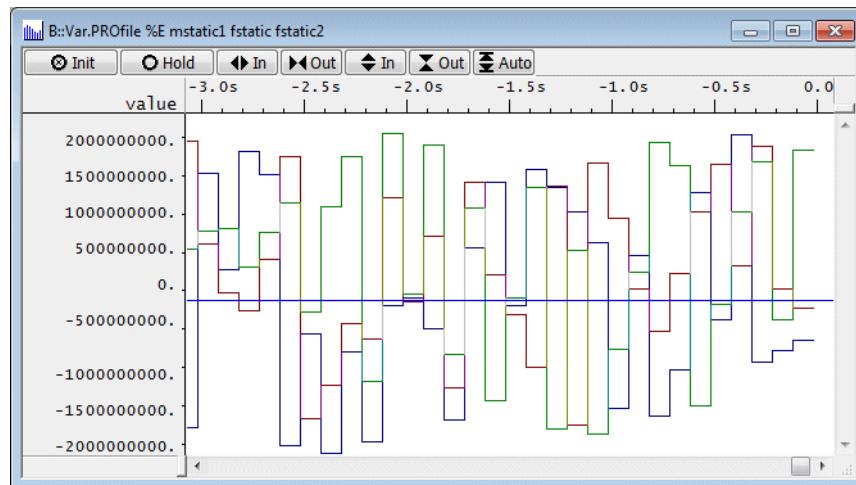

**Var.PROfile %E <variable1> [<variable2>] [<variable3>]**

# Variable Logging

---

Variable changes can be logged in the following way:

- **SNOOPer trace**
- **Var.LOG command**

## SNOOPer Trace

---

A video tutorial about the SNOOPer trace can be found here:

[support.lauterbach.com/kb/articles/trace32-variable-logging-using-the-snooper-trace](https://support.lauterbach.com/kb/articles/trace32-variable-logging-using-the-snooper-trace)

## Basics

---


Some processor architectures allow the debugger to read the target's physical memory while the program execution is running. For details refer to "["Run-time Memory Access"](#)" in TRACE32 Glossary, page 42 (glossary.pdf).

TRACE32 implements the so-called SNOOPer trace based on this feature. Memory content is read periodically or as fast as possible and stored with timestamp information into a trace memory. The trace memory for the SNOOPer is allocated on the host.

## First example:

The following steps are required to set up the SNOOPer trace:


### 3. Open the SNOOPer configuration window.

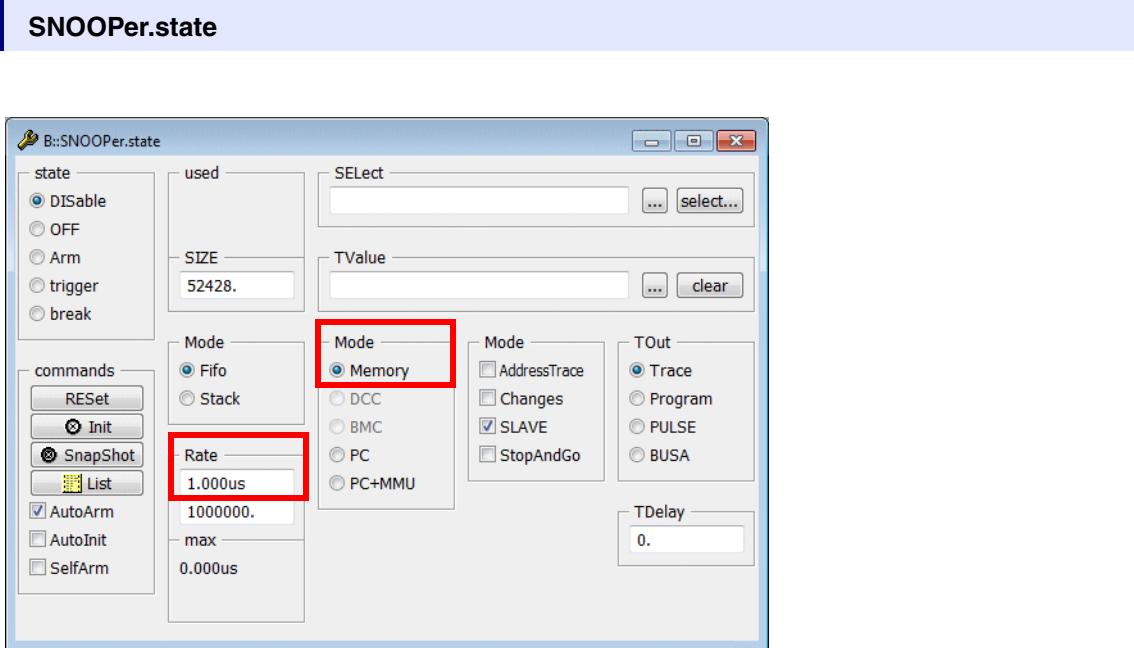

#### SNOOPer.Mode Memory

Reading memory in the specified Rate is the default setting for the SNOOPer trace.

#### 4. Specify the SNOOPer size as *<number of trace records>*.

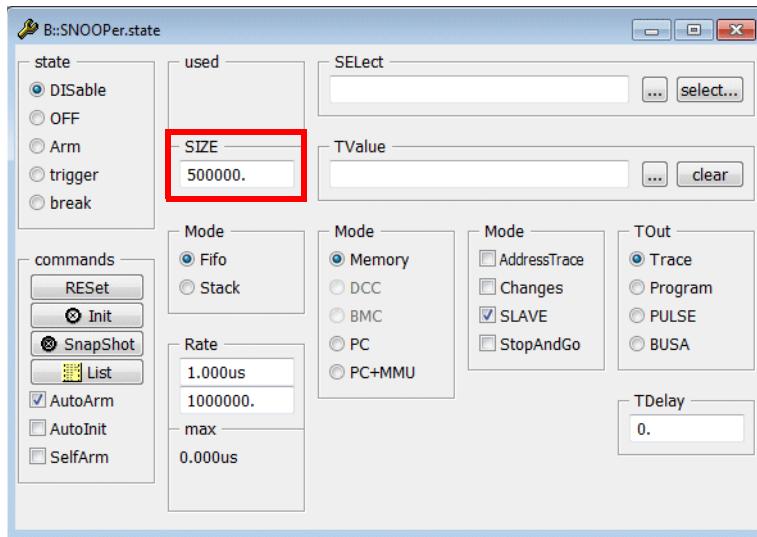

TRACE32 allocates memory on the host for the requested size.

The SNOOPer size is only limited by the size of RAM on the host. It is recommended to stay far below this limit so that sufficient free memory is available for TRACE32 and other applications.

#### SNOOPer.SIZE *<number of records>*

```
SNOOPer.SIZE 500000.
```

## 5. Specify the variable you are interested in.


It is best to read variables via the SNOOPer whose sizes are smaller or equal the data bus width of the core in use.

To specify the variable:


3.1. Use the **select...** button in the SNOOPer configuration window to open the **SNOOPer.SElect** dialog.

3.2. Use the **List Symbols** button in the SNOOPer.SESelect dialog to get a list of all variables.


3.3. Select the variable you are interested in.

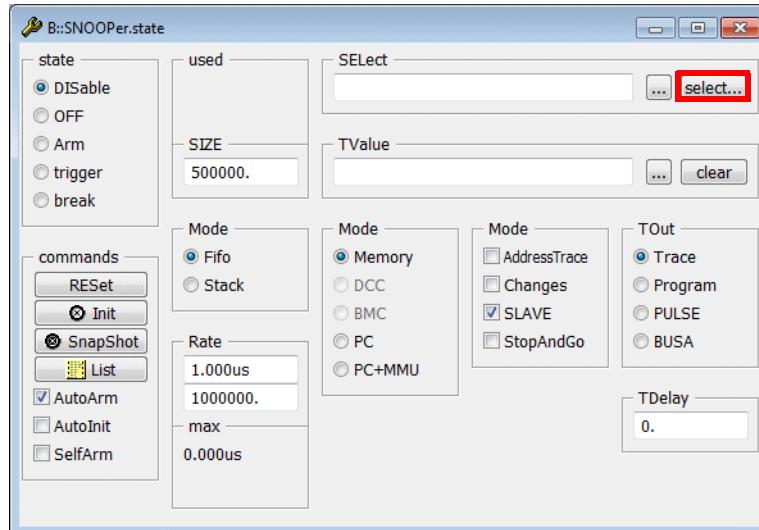

3.1

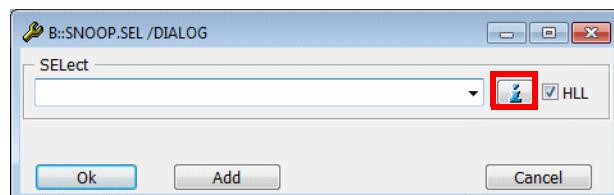


3.2

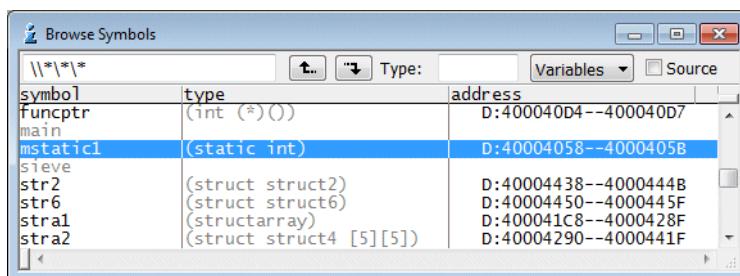

3.3

The selected variable is listed in the **SElect** field of the SNOOPer configuration window.

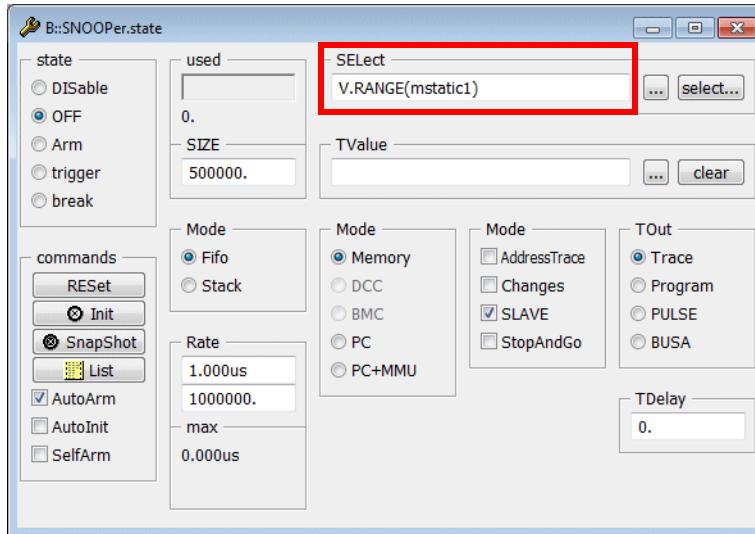


### SNOOPer.SElect Var.RANGE(<variable>)

**Var.RANGE(<variable>)**


This TRACE32 function returns the address range used by a variable

## SNOOPer.Mode StopAndGo

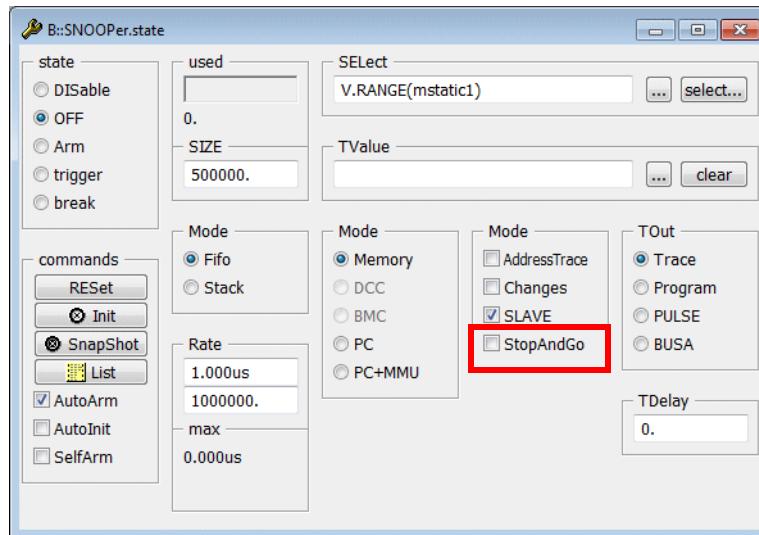


TRACE32 checks/unchecks the **StopAndGo** checkbox automatically.

|            |                                                                                                                                                            |
|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>OFF</b> | The processor architecture in use allows the debugger to read physical memory while the program execution is running and this debugger feature is enabled. |
|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|

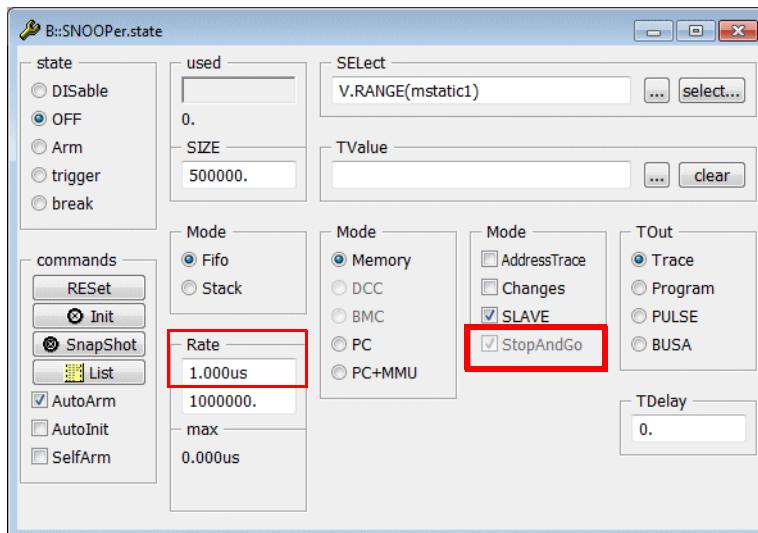

|           |                                                                                                                                                                                                                                                                                                                                                                                             |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>ON</b> | <p>The processor architecture in use does not allow the debugger to read physical memory while the program execution is running or this debugger feature is disabled.</p> <p>If the SNOOPer is working in StopAndGo mode, the program execution is stopped in the specified Rate in order to read the variable content. Such a stop can take more than 1 ms in the worst case scenario.</p> |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Open the **SYStem** settings window to check if reading the physical memory while the program execution is running can be enabled for your debugger.

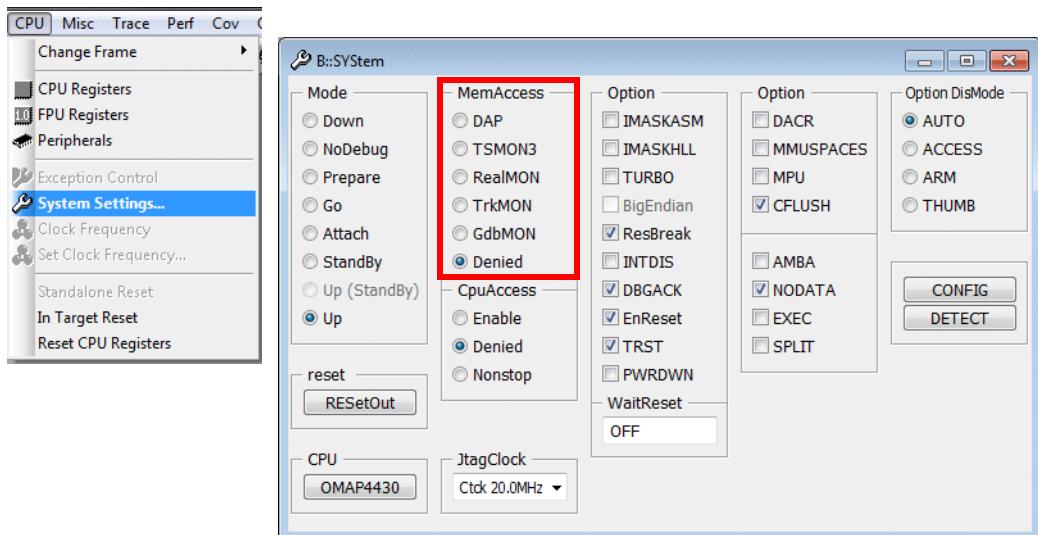

If there are beside **Denied** other selectable radio buttons in the **MemAccess** field refer to your **Processor Architecture Manuals** before you select one.

**6. Start the program execution.**

**7. Stop the program execution.**

Please be aware that the contents of the SNOOPer trace can not be read while recording.

**8. Display the result by pushing the List button.**

The image shows the SNOOPer software interface. The top window is titled 'B::SNOOPer.state' and contains configuration settings for the SNOOPer trace. The 'state' section has radio buttons for 'DISABLE', 'OFF', 'Arm', 'trigger', and 'break', with 'OFF' selected. The 'used' section shows a blue bar representing memory usage, with '500000.' in the 'SIZE' field. The 'SElect' section shows 'V.RANGE(mstatic1)' in the 'TValue' field. The 'Mode' section has radio buttons for 'Fifo' (selected) and 'Stack'. The 'Rate' section shows '1.000us' in the 'TValue' field. The 'Mode' section for memory has radio buttons for 'DCC', 'BMC', 'PC' (selected), and 'PC+MMU'. The 'TOut' section has radio buttons for 'Trace' (selected), 'Program', 'PULSE', and 'BUSA'. The 'TDelay' section shows '0.' in the 'TValue' field. The bottom window is titled 'B::SNOOP.List' and displays a table of trace data. The table has columns: record, run, address, cycle, data, symbol, and ti.back. The data shows multiple entries of snoop activity on address SD:40004058, with symbols like '\\diabc\\diabc\\mstatic1' and times like 82.330us.

| record      | run | address     | cycle | data     | symbol                   | ti.back   |
|-------------|-----|-------------|-------|----------|--------------------------|-----------|
| -0000000134 |     | SD:40004058 | snoop | 084F7E1C | \\diabc\\diabc\\mstatic1 | 82.330us  |
| -0000000133 |     | SD:40004058 | snoop | 084F7E1C | \\diabc\\diabc\\mstatic1 | 81.930us  |
| -0000000132 |     | SD:40004058 | snoop | 084F7E1C | \\diabc\\diabc\\mstatic1 | 82.300us  |
| -0000000131 |     | SD:40004058 | snoop | 084F7E1C | \\diabc\\diabc\\mstatic1 | 81.920us  |
| -0000000130 |     | SD:40004058 | snoop | 084F7E1C | \\diabc\\diabc\\mstatic1 | 82.280us  |
| -0000000129 |     | SD:40004058 | snoop | 084F7E1C | \\diabc\\diabc\\mstatic1 | 379.890us |
| -0000000128 |     | SD:40004058 | snoop | 084F7E1C | \\diabc\\diabc\\mstatic1 | 87.150us  |
| -0000000127 |     | SD:40004058 | snoop | 084F7E1C | \\diabc\\diabc\\mstatic1 | 106.330us |
| -0000000126 |     | SD:40004058 | snoop | 084F7E1C | \\diabc\\diabc\\mstatic1 | 90.610us  |
| -0000000125 |     | SD:40004058 | snoop | 084F7E1C | \\diabc\\diabc\\mstatic1 | 85.570us  |
| -0000000124 |     | SD:40004058 | snoop | 084F7E1C | \\diabc\\diabc\\mstatic1 | 86.480us  |
| -0000000123 |     | SD:40004058 | snoop | 084F7E1C | \\diabc\\diabc\\mstatic1 | 82.820us  |
| -0000000122 |     | SD:40004058 | snoop | 084F7E1C | \\diabc\\diabc\\mstatic1 | 89.845us  |
| -0000000121 |     | SD:40004058 | snoop | 1FCBE442 | \\diabc\\diabc\\mstatic1 | 84.935us  |
| -0000000120 |     | SD:40004058 | snoop | 1FCBE442 | \\diabc\\diabc\\mstatic1 | 82.290us  |
| -0000000119 |     | SD:40004058 | snoop | 1FCBE442 | \\diabc\\diabc\\mstatic1 | 82.640us  |

## SNOOPer.List

Check **Mode Changes**, if the read variable content should only be stored to the SNOOPer trace when it has changed.


The screenshot shows the SNOOPer software interface with two main windows. The top window is titled 'B::SNOOPer.state' and contains configuration settings for the SNOOPer. It includes sections for 'state' (radio buttons for 'DISable', 'OFF', 'Arm', 'trigger', and 'break'), 'used' (text input '16101.' and 'SIZE' input '500000.'), 'SElect' (text input 'V.RANGE(mstatic1)' with a 'select...' button), 'TValue' (text input with a 'clear' button), 'Mode' (radio buttons for 'Fifo' and 'Stack', with 'Memory' selected), 'Mode' (checkboxes for 'AddressTrace' and 'Changes', with 'Changes' checked), 'TOut' (radio buttons for 'Trace' and 'Program', with 'Trace' selected), and 'TDelay' (checkboxes for 'SLAVE', 'PC', 'PC+MMU', and 'StopAndGo'). The bottom window is titled 'B::SNOOP.List' and displays a table of captured data. The table has columns: record, run, address, cycle, data, symbol, and ti.back. The data shows multiple entries of snoop activity on address SD:40004058, with various cycle counts and data values like 7FBC6AF2, E8DDF996, 6AAB4820, etc. The 'symbol' column shows '\\diabc\\diabc\\mstatic1' for all entries. The 'ti.back' column shows times like 1.538ms, 1.458ms, 1.488ms, etc.

| record      | run | address     | cycle | data     | symbol                   | ti.back |
|-------------|-----|-------------|-------|----------|--------------------------|---------|
| -0000000014 |     | SD:40004058 | snoop | 7FBC6AF2 | \\diabc\\diabc\\mstatic1 | 1.538ms |
| -0000000013 |     | SD:40004058 | snoop | E8DDF996 | \\diabc\\diabc\\mstatic1 | 1.458ms |
| -0000000012 |     | SD:40004058 | snoop | 6AAB4820 | \\diabc\\diabc\\mstatic1 | 1.488ms |
| -0000000011 |     | SD:40004058 | snoop | 172967F4 | \\diabc\\diabc\\mstatic1 | 1.483ms |
| -0000000010 |     | SD:40004058 | snoop | AB45975A | \\diabc\\diabc\\mstatic1 | 1.484ms |
| -0000000009 |     | SD:40004058 | snoop | F019B04E | \\diabc\\diabc\\mstatic1 | 1.483ms |
| -0000000008 |     | SD:40004058 | snoop | 95EEAC58 | \\diabc\\diabc\\mstatic1 | 1.485ms |
| -0000000007 |     | SD:40004058 | snoop | 171663DC | \\diabc\\diabc\\mstatic1 | 1.487ms |
| -0000000006 |     | SD:40004058 | snoop | 7F1E0202 | \\diabc\\diabc\\mstatic1 | 1.424ms |
| -0000000005 |     | SD:40004058 | snoop | DE518446 | \\diabc\\diabc\\mstatic1 | 1.486ms |
| -0000000004 |     | SD:40004058 | snoop | ECB67150 | \\diabc\\diabc\\mstatic1 | 1.490ms |
| -0000000003 |     | SD:40004058 | snoop | 3A3B9B84 | \\diabc\\diabc\\mstatic1 | 1.482ms |
| -0000000002 |     | SD:40004058 | snoop | CE14D8EA | \\diabc\\diabc\\mstatic1 | 1.488ms |
| -0000000001 |     | SD:40004058 | snoop | 6EBE8F7E | \\diabc\\diabc\\mstatic1 | 1.483ms |

## SNOOPer.Mode Changes ON

## The Logging Interval

The time interval (**SNOOPer.Rate**) at which TRACE32 reads the physical memory at program runtime is set to 1.us by default.

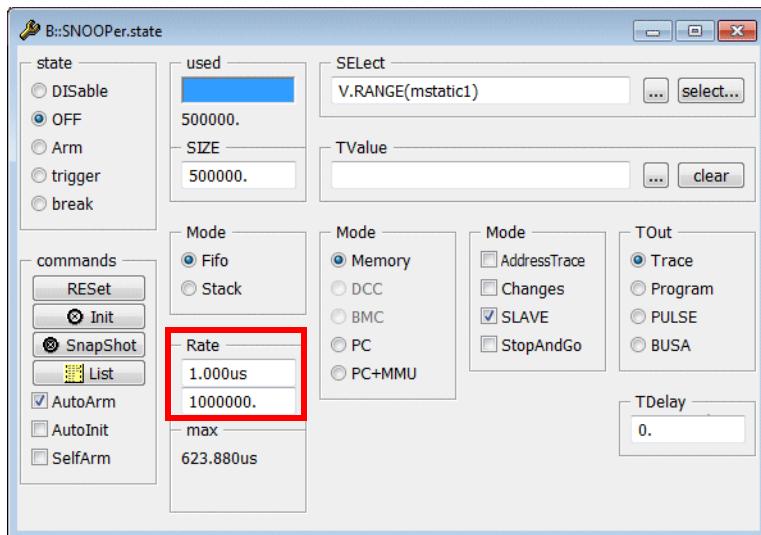


The rate at which the debugger can actually read the physical memory is bigger.

The actual rate might be increased by a higher JTAG clocks (**SYStem.JtagClock <frequency>**). Please refer to your processor/chip manual to find out what the max. JTAG clock can be.

In the example recording below the average time interval is about 85.us. So it is recommended to use the **SNOOPer** only for variables that are changed at a higher rate by the application program.


| record       | run | address     | cycle | data     | symbol                   | ti.back   |
|--------------|-----|-------------|-------|----------|--------------------------|-----------|
| -00000000134 |     | SD:40004058 | snoop | 084F7E1C | \\diabc\\diabc\\mstatic1 | 82.330us  |
| -00000000133 |     | SD:40004058 | snoop | 084F7E1C | \\diabc\\diabc\\mstatic1 | 81.930us  |
| -00000000132 |     | SD:40004058 | snoop | 084F7E1C | \\diabc\\diabc\\mstatic1 | 82.300us  |
| -00000000131 |     | SD:40004058 | snoop | 084F7E1C | \\diabc\\diabc\\mstatic1 | 81.920us  |
| -00000000130 |     | SD:40004058 | snoop | 084F7E1C | \\diabc\\diabc\\mstatic1 | 82.280us  |
| -00000000129 |     | SD:40004058 | snoop | 084F7E1C | \\diabc\\diabc\\mstatic1 | 379.890us |
| -00000000128 |     | SD:40004058 | snoop | 084F7E1C | \\diabc\\diabc\\mstatic1 | 87.150us  |
| -00000000127 |     | SD:40004058 | snoop | 084F7E1C | \\diabc\\diabc\\mstatic1 | 106.330us |
| -00000000126 |     | SD:40004058 | snoop | 084F7E1C | \\diabc\\diabc\\mstatic1 | 90.610us  |
| -00000000125 |     | SD:40004058 | snoop | 084F7E1C | \\diabc\\diabc\\mstatic1 | 85.570us  |
| -00000000124 |     | SD:40004058 | snoop | 084F7E1C | \\diabc\\diabc\\mstatic1 | 86.480us  |
| -00000000123 |     | SD:40004058 | snoop | 084F7E1C | \\diabc\\diabc\\mstatic1 | 82.820us  |
| -00000000122 |     | SD:40004058 | snoop | 084F7E1C | \\diabc\\diabc\\mstatic1 | 89.845us  |
| -00000000121 |     | SD:40004058 | snoop | 1FCBE442 | \\diabc\\diabc\\mstatic1 | 84.935us  |
| -00000000120 |     | SD:40004058 | snoop | 1FCBE442 | \\diabc\\diabc\\mstatic1 | 82.290us  |
| -00000000119 |     | SD:40004058 | snoop | 1FCBE442 | \\diabc\\diabc\\mstatic1 | 82.640us  |

Both, the host and the debugger are no real-time systems, so individual time intervals can be longer then the average interval. The longest snooping interval for the current recording is displayed in the **max** field of the **SNOOPer.state** window.



## Display Options


In addition to the default **SNOOPer.List** display various other display options are provided.

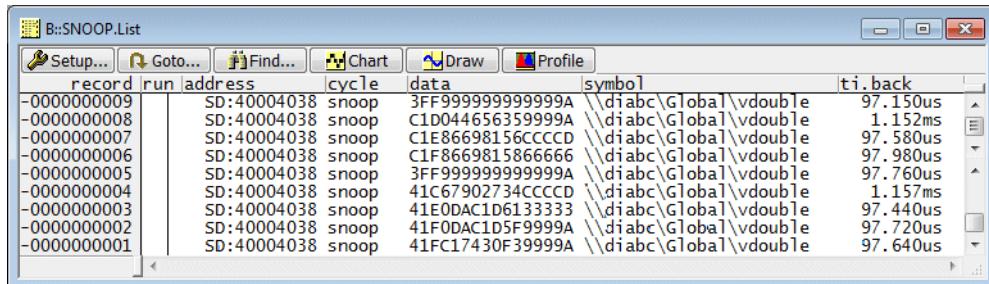

| record      | run | address     | cycle | data             | symbol                 | ti.back  |
|-------------|-----|-------------|-------|------------------|------------------------|----------|
| -0000000009 |     | SD:40004038 | snoop | 3FF999999999999A | \\diabc\Global\vdouble | 97.150us |
| -0000000008 |     | SD:40004038 | snoop | C1D044656359999A | \\diabc\Global\vdouble | 1.152ms  |
| -0000000007 |     | SD:40004038 | snoop | C1E86698156CCCCD | \\diabc\Global\vdouble | 97.580us |
| -0000000006 |     | SD:40004038 | snoop | C1F8669815866666 | \\diabc\Global\vdouble | 97.980us |
| -0000000005 |     | SD:40004038 | snoop | 3FF999999999999A | \\diabc\Global\vdouble | 97.760us |
| -0000000004 |     | SD:40004038 | snoop | 41C67902734CCCCD | \\diabc\Global\vdouble | 1.157ms  |
| -0000000003 |     | SD:40004038 | snoop | 41E0DAC1D6133333 | \\diabc\Global\vdouble | 97.440us |
| -0000000002 |     | SD:40004038 | snoop | 41F0DAC1D5F9999A | \\diabc\Global\vdouble | 97.720us |
| -0000000001 |     | SD:40004038 | snoop | 41FC17430F39999A | \\diabc\Global\vdouble | 97.640us |

SNOOPer.List Var TIME.Back


; list the recorded variable in  
; its HLL representation together  
; with the time relative to the  
; previous record

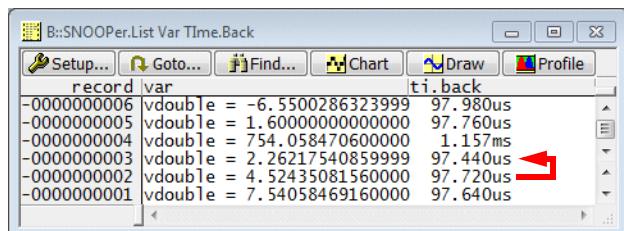

| record      | var                         | ti.back  |
|-------------|-----------------------------|----------|
| -0000000006 | vdouble = -6.5500286323999  | 97.980us |
| -0000000005 | vdouble = 1.60000000000000  | 97.760us |
| -0000000004 | vdouble = 754.058470600000  | 1.157ms  |
| -0000000003 | vdouble = 2.262175408599999 | 97.440us |
| -0000000002 | vdouble = 4.52435081560000  | 97.720us |
| -0000000001 | vdouble = 7.540584691600000 | 97.640us |


SNOOPer.List TIME.Back Var Data

; rearrange the column layout so  
; it fits your requirements

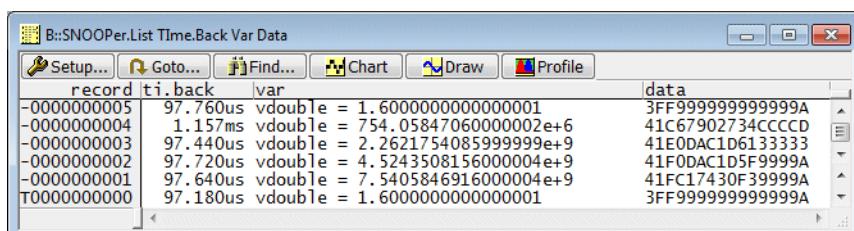

| record      | ti.back  | var                            | data             |
|-------------|----------|--------------------------------|------------------|
| -0000000005 | 97.760us | vdouble = 1.600000000000001    | 3FF999999999999A |
| -0000000004 | 1.157ms  | vdouble = 754.0584706000002e+6 | 41C67902734CCCCD |
| -0000000003 | 97.440us | vdouble = 2.262175408599999e+9 | 41E0DAC1D6133333 |
| -0000000002 | 97.720us | vdouble = 4.524350815600004e+9 | 41F0DAC1D5F9999A |
| -0000000001 | 97.640us | vdouble = 7.540584691600004e+9 | 41FC17430F39999A |
| T0000000000 | 97.180us | vdouble = 1.6000000000000001   | 3FF999999999999A |

```
SNOOPer.DRAW.Var %DEFault vdouble ; display the changes of the
; variable over the time as a graph
```



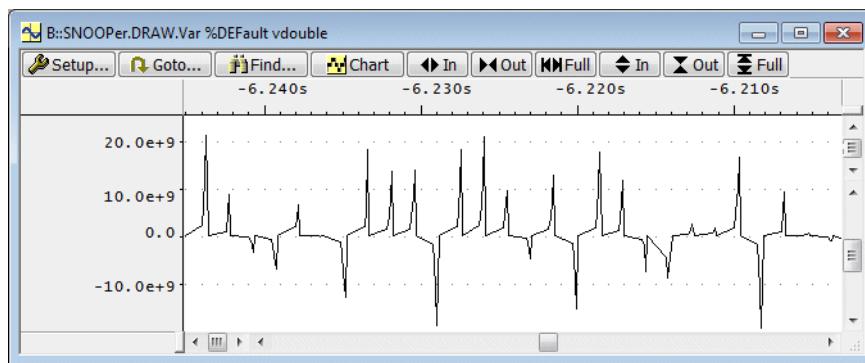


If you are analyzing a variable that maintains a state, the following display options might be useful:

```
SNOOPER.List Var TIme.Back
```


```
; display the statistical distribution of a variable value over the time
; Data advise the command to analyze the recorded data information
; Address informs the command for which address the data
; should be analyzed
SNOOPER.STATistic.DistriB Data /Filter Address Var.RANGE(flags[3])
```

```
; display a time chart of the variable values
SNOOPER.Chart.DistriB Data /Filter Address Var.RANGE(flags[3])
```

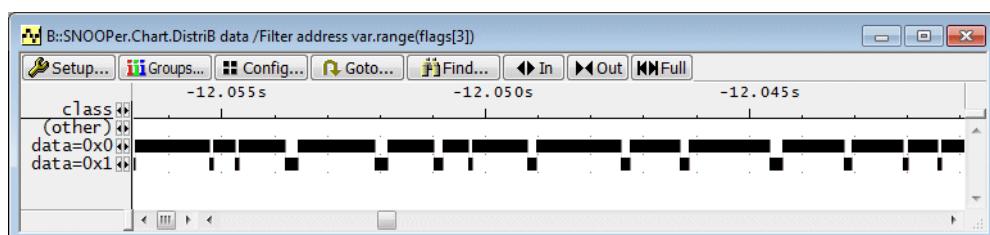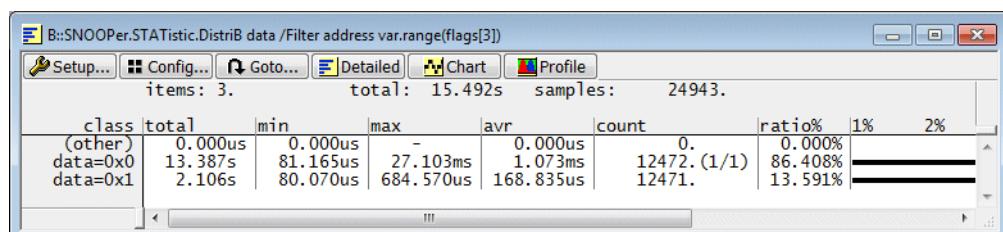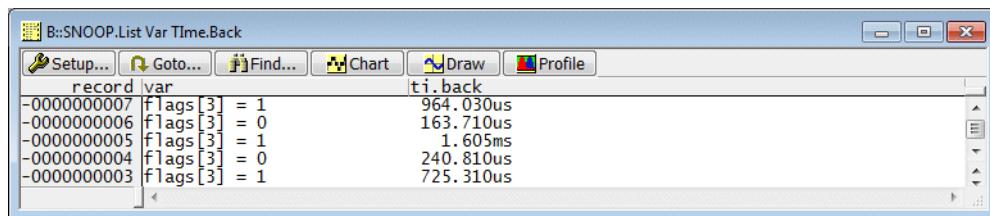


# Logging of Multiple Variables

TRACE32 PowerView allows the logging of up to 16 variables.

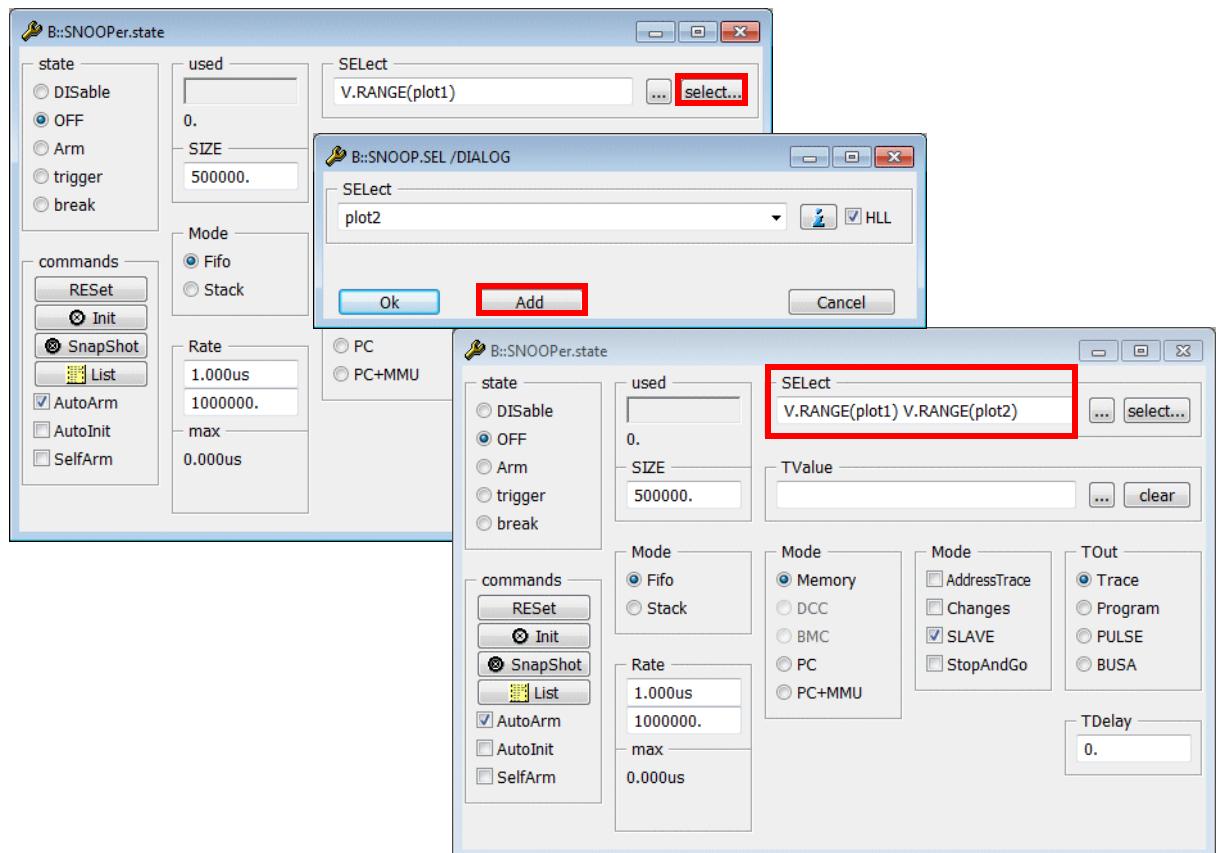

If you use the **Add** button in the **SNOOPer.SElect** dialog, additional variables that should be read by the SNOOPer can be selected.

## SNOOPer.SElect Var.RANGE(<variable1>) Var.RANGE(<variable2>) ...

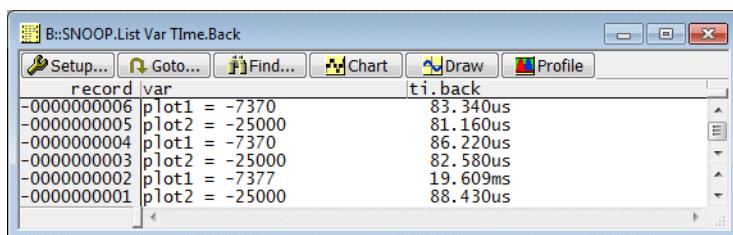

Please be aware that the time interval at which a single variable can be read by the debugger at program run-time is growing with every selected variable.

For the graphical display of variables changes over the time, you can:


- superimpose up to three variables
- establish a time- and zoom-synchronization between the different displays

```
SNOOPer.DRAW.Var %DEFault plot1 plot2 ; superimpose variables
```




```
SNOOPer.DRAW.Var %Default plot1 /ZoomTrack ; the option ZoomTrack  
; establishes time- and  
; zoom-synchronisation  
; between display windows  
  
SNOOPer.DRAW.Var %Default plot2 /ZoomTrack
```

### Active window


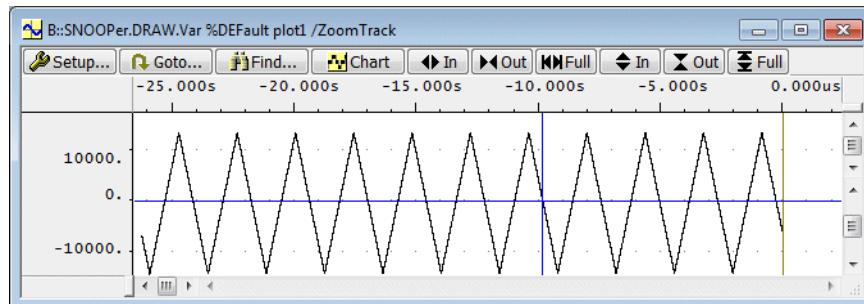


Windows with the option **/ZoomTrack** are time- and zoom-synchronized to the cursor in the active window

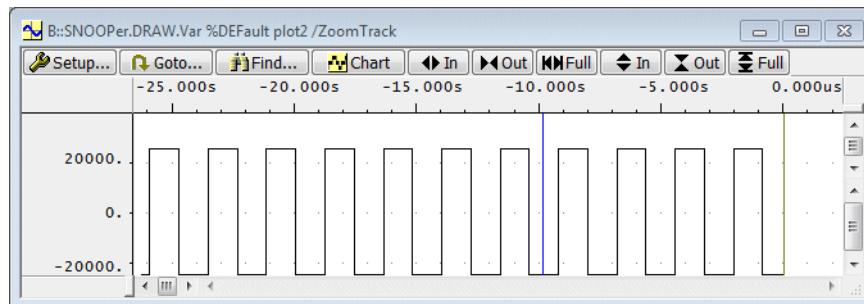

# Logging in an SMP System

The SNOOPer can also be used while debugging an SMP system. The debugger can read the shared memory as an independent bus master .

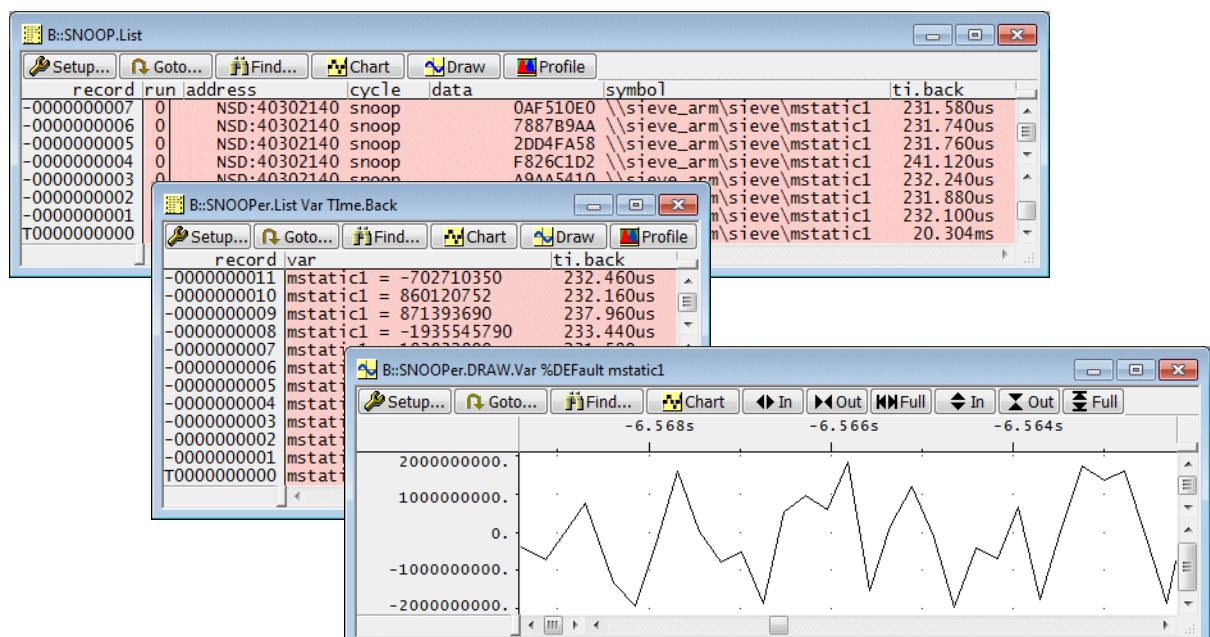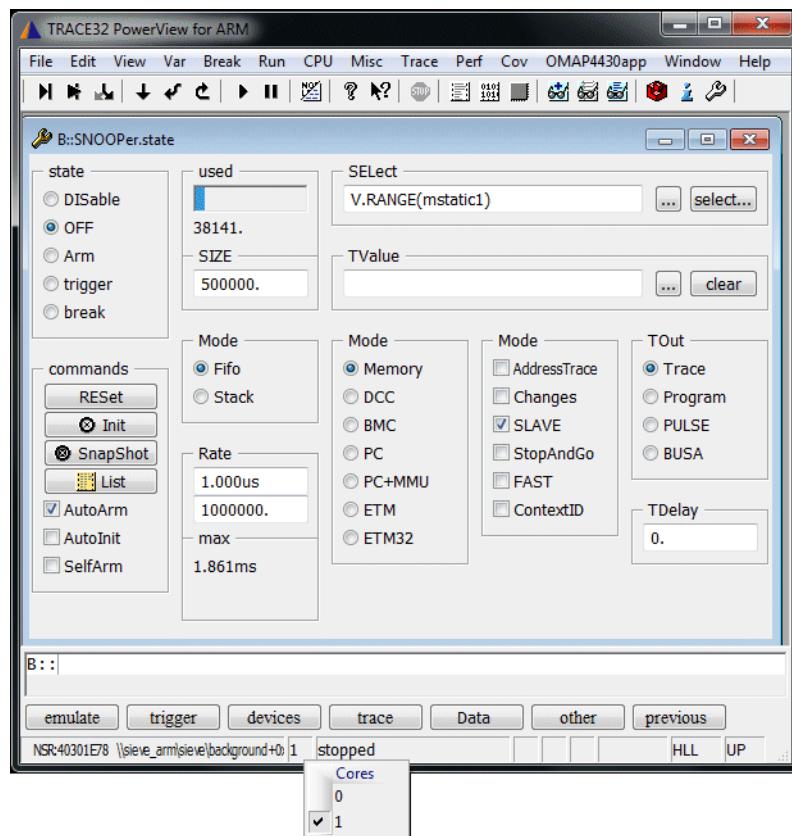

```
PRinTer.FILE snoop_plot1.lst           ; specify documentation file name
PRinTer.FileType CSV                  ; specify Comma-Separated Value as
                                         ; output format
WinPrint.SNOOPer.List                ; save result of the command
                                         ; SNOOPer.List to file
```

## Summary

---

- Only recommended if your processor architecture allows the debugger to read physical memory while the program execution is running.
- Recommended for variables whose sizes are smaller or equal to the core data bus width.
- Only recommended for variables that change with a lower frequency then the achievable SNOOPer frequency.
  
- Up to 16 variables can be read while the program execution is running.
- Read values are timestamped and stored in the SNOOPer trace memory. The SNOOPer trace size is only limited by the RAM on the host computer.
- SNOOPer trace can not be read while recording.
- Various display options are provided.

```
...
SNOOPeR.RESet ; reset the SNOOPeR functionality
; to its default settings

SNOOPeR.state ; display a SNOOPeR configuration
; window

SNOOPeR.SIZE 500000. ; specify the size of the SNOOPeR
; trace

SNOOPeR.Rate 500.us ; specify the SNOOPeR sampling rate

SNOOPeR.AutoInit ON ; advise TRACE32 to delete the
; contents of the SNOOPeR trace
; whenever the program execution is
; started with Go or Step

SNOOPeR.SElect Var.RANGE(var1) ; specify the variable that should
; be logged by the SNOOPeR trace

Go ; start the program execution

WAIT 5.s ; wait 5 seconds

Break ; stop the program execution

SNOOPeR.List Var TIme.Back ; display the result as a list


SNOOPeR.DRAW.VAR %DEFault var1 ; display the result as a time
; graph

...
...
```

# Var.LOG Command

The command **Var.LOG** advises TRACE32 PowerView to log the contents of the specified variables to the TRACE32 PowerView Message AREA whenever the program execution is stopped. Any variable can be logged.

```
Var.LOG fstatic2 i ast
```

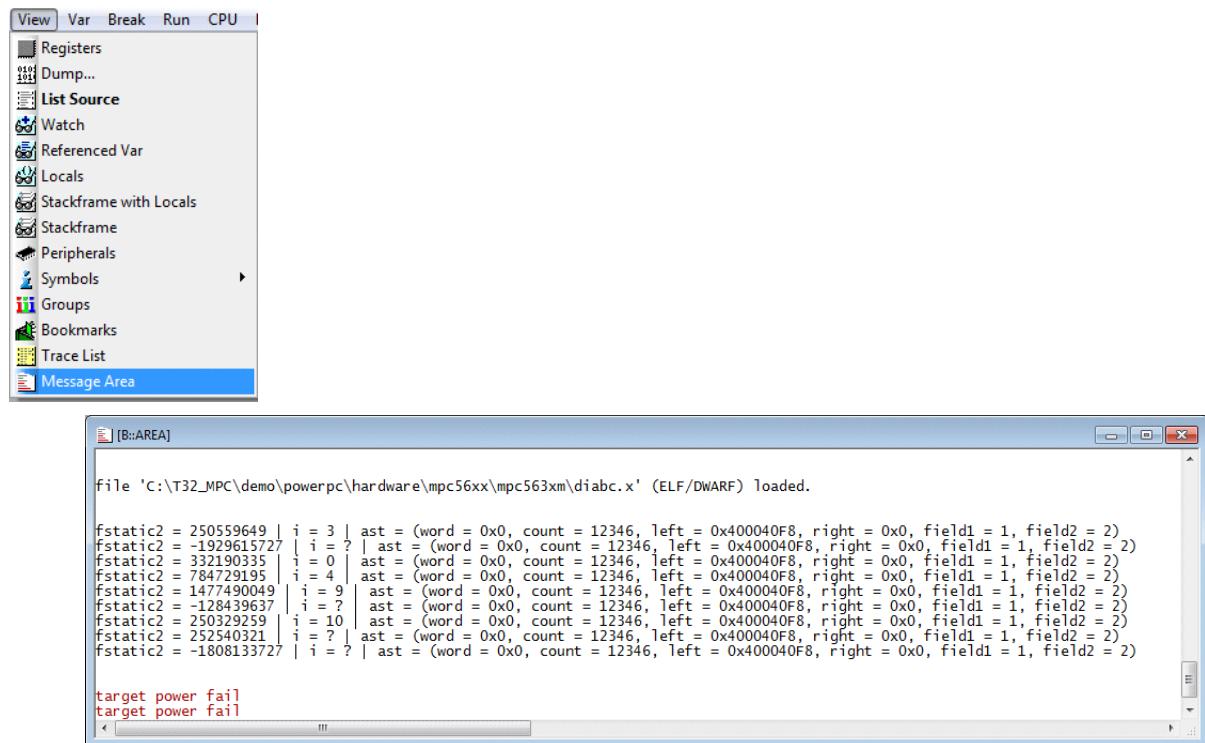

## AREA.view

Display TRACE32 PowerView Message Area.

## Var.LOG [%<format>] <variable1> ...

Log specified variables to TRACE32 PowerView Message AREA.

## Var.LOG

End logging.

Since the TRACE32 PowerView Message AREA also includes all system and error messages it is recommended to use a dedicated AREA for the variable logging.

|                                                        |                                                |
|--------------------------------------------------------|------------------------------------------------|
| <b>AREA.Create</b> <name>                              | Set up an new AREA window.                     |
|                                                        | Please be aware that <name> is case sensitive. |
| <b>AREA.view</b> <name>                                | Display AREA window.                           |
| <b>AREA.CLEAR</b> <name>                               | Clear the AREA window.                         |
| <b>Var.LOG</b> [%<format>] <variable1> .../AREA <name> | Log the specified variables to the area.       |

```
AREA.Create VarLogging
AREA.view VarLogging
Var.LOG fstatic2 i ast /AREA VarLogging
...
Var.LOG
```

The following command allow to redirect the area outputs to a file.

|                                |                                        |
|--------------------------------|----------------------------------------|
| <b>AREA.OPEN</b> <name> <file> | Save outputs to area <name> to <file>. |
| <b>AREA CLOSE</b> <name>       | Stop output and close <file>.          |

```
AREA.Create VarLogging
AREA.OPEN VarLogging log1.txt
AREA.view VarLogging
Var.LOG fstatic2 i ast /AREA VarLogging
...
Var.LOG
AREA CLOSE VarLogging
TYPE log1.txt
```

# Testing of Functions

**Var.set** [%<format>] <var>

Execute a function in the target

```
Var.set func5(4,8,17)
```

